

CMOS Area Image Sensor


TCM5020ALU

1/7 Inch 110 k Pixel CMOS B/W Image Sensor

The TCM5020ALU is a CMOS b/w (= black and white) image sensor that meets with CIF format. It enables all pixel signals to be output in sequence each 1/30 s. (progressive scanning)

This element is equipped with 290 vertical and 367 horizontal signal pixels, and the image size meets with 1/7 inch optical format. The package with lens is applicable. This small lens unit package realize small-scaled system.

Use of the CMOS process enables low power-consumption operations with a single power voltage driving. It is perfect for use as an image input device for mobile equipments.

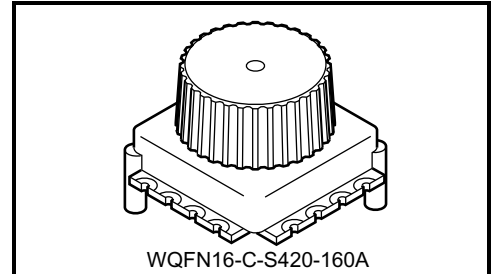


Weight: 0.5 g (typ.)


Features

- Optical size: 1/7 inch optical format
- Total pixel numbers: 382 (H) × 306 (V)
- Signal pixel numbers: 367 (H) × 290 (V)
- Pixel pitch: 5.6 μm (H) × 5.6 μm (V) (square pixel)
- Image size: 2.055 mm (H) × 1.624 mm (V)
- Package: 16-pin Optical lens unit
- Frame frequency: 30 Hz
- Power voltage: 2.8 V
- Additional functions: Variable electronic shutter (1/30 to 1/4500 s)
Inverse top-down read-out

Pin Connection (top view)

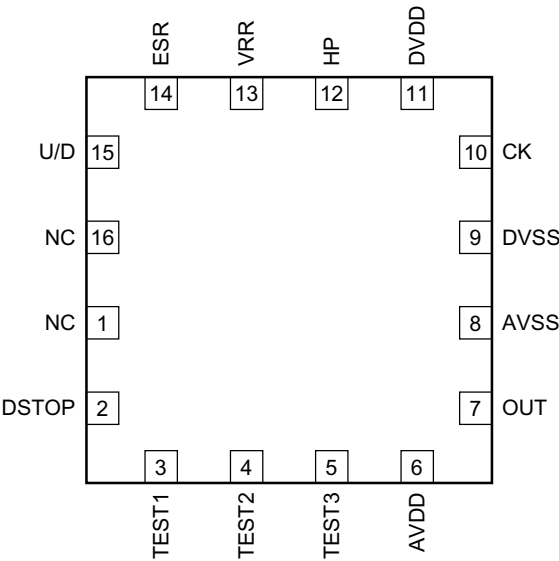

Circuit Diagram

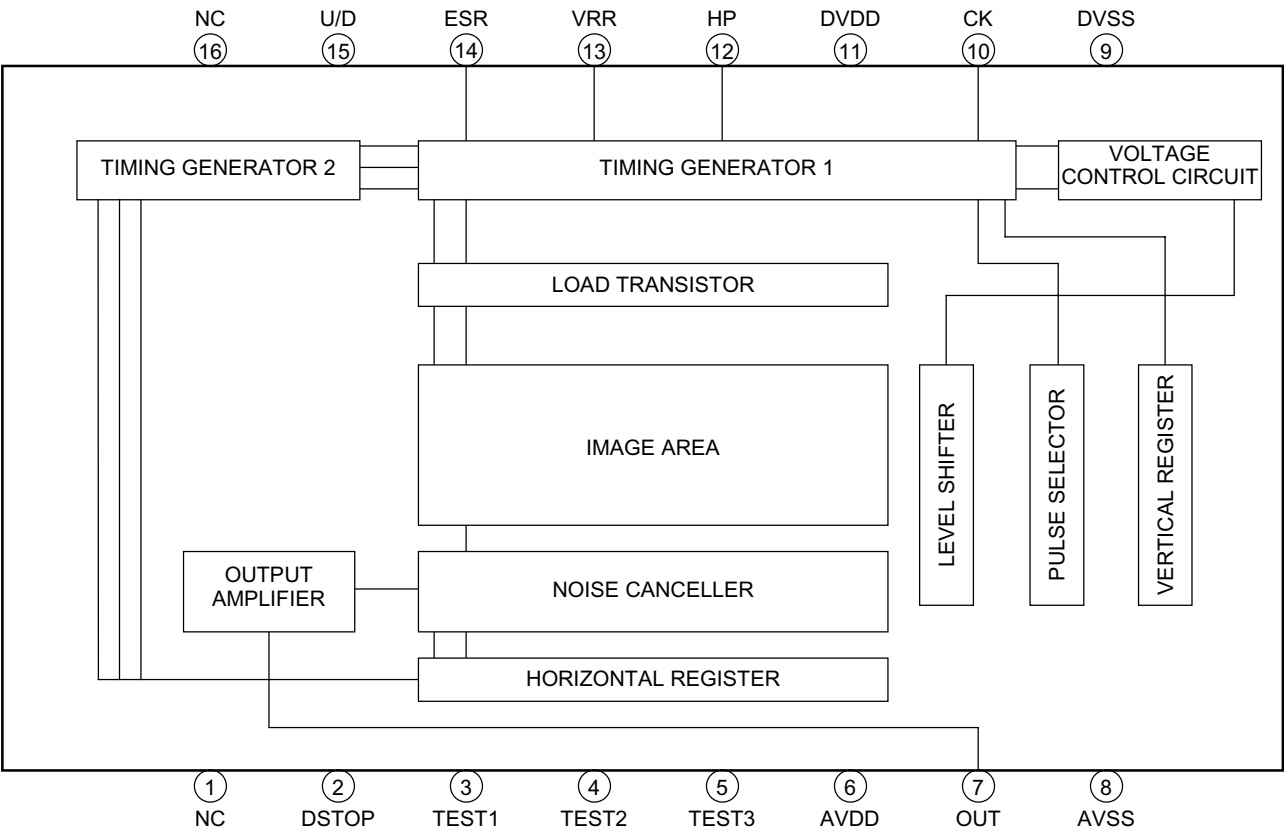

Pin Functions

Pin No.	Symbol	I/O	Function
1	NC	I	No connection
2	DSTOP	I	Operations suspension control pin. H: Normal operations, L: Operations suspended
3	TEST1	I	Test pin. Normally connected to GND through a capacitor (4.7 to 10 μ F)
4	TEST2	I	Test pin 2. Normally connected to GND through a capacitor (0.1 to 10 μ F)
5	TEST3	I	Test pin 3. Normally connected to GND through a capacitor (0.1 to 10 μ F)
6	AVDD	—	Analog power supply
7	OUT	O	Signal output
8	AVSS	—	Analog GND
9	DVSS	—	Digital GND
10	CK	I	Clock pulse input. Double the frequency of signal output.
11	DVDD	—	Digital power supply
12	HP	I	Horizontal timing start pulse input
13	VRR	I	Vertical timing start pulse input
14	ESR	I	Electrical shutter start pulse input
15	U/D	I	Reading mode switching pin. L: Normal operation H: Up and down inverting mode
16	NC	I	No connection

Maximum Ratings

Characteristics	Symbol	Rating	Unit
Power supply voltage	V_{DD}	-0.5~4.2	V
Input voltage	V_{IN}	-0.5~ $V_{DD} + 0.5$	V
Input protection diode current	I_{IN}	± 20	mA
Storage temperature	T_{stg}	-30~60	$^{\circ}$ C

Recommended Operating Conditions

Characteristics	Symbol	Rating	Unit
Power supply voltage	V_{AVDD} V_{DVDD}	2.6~3.0	V
Input voltage	V_{IN}	0~ V_{DD}	V
Operating temperature	T_{opr}	-20~50	$^{\circ}$ C

Optical and Electrical Characteristics


Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Sensitivity	R	—	Standard conditions (Note1)	400	450	—	mV
Saturation voltage	V _{SAT}	—	—	500	600	—	mV
Dark signal voltage	V _{DRK}	—	Ta = 60°C, Dark condition	—	1.0	2.0	mV
Blooming margin	BLM	—	Standard light condition	500	—	—	times
S/N (dark)	S/N	—	Dark condition	55	57	—	dB
Smearing	SMR	—	1/10 V	—	—	−140	dB
Lag	LAG	—	Output signal: 20 mV, 1st field	—	0	1	mV
Power supply current	I _{DD}	—	V _{DD} = 2.8 V	—	5	10	mA

Note1: Standard conditions

- Light conditions: Color temperature 3200 K halogen light box. Surface brightness: 100 nt of equal white light.
- IR cut filter
- Optical lens:

Focal length	f = 2.1 mm
F number	F2.3
Field of view	H52°/V42°
MTF	90 lines in central 50 lines around
TV distortion	−2.5%
- Frame frequency: 30 Hz continual operations, electronic shutter off (storage time = 1/30 s).


Pixel Arrangement

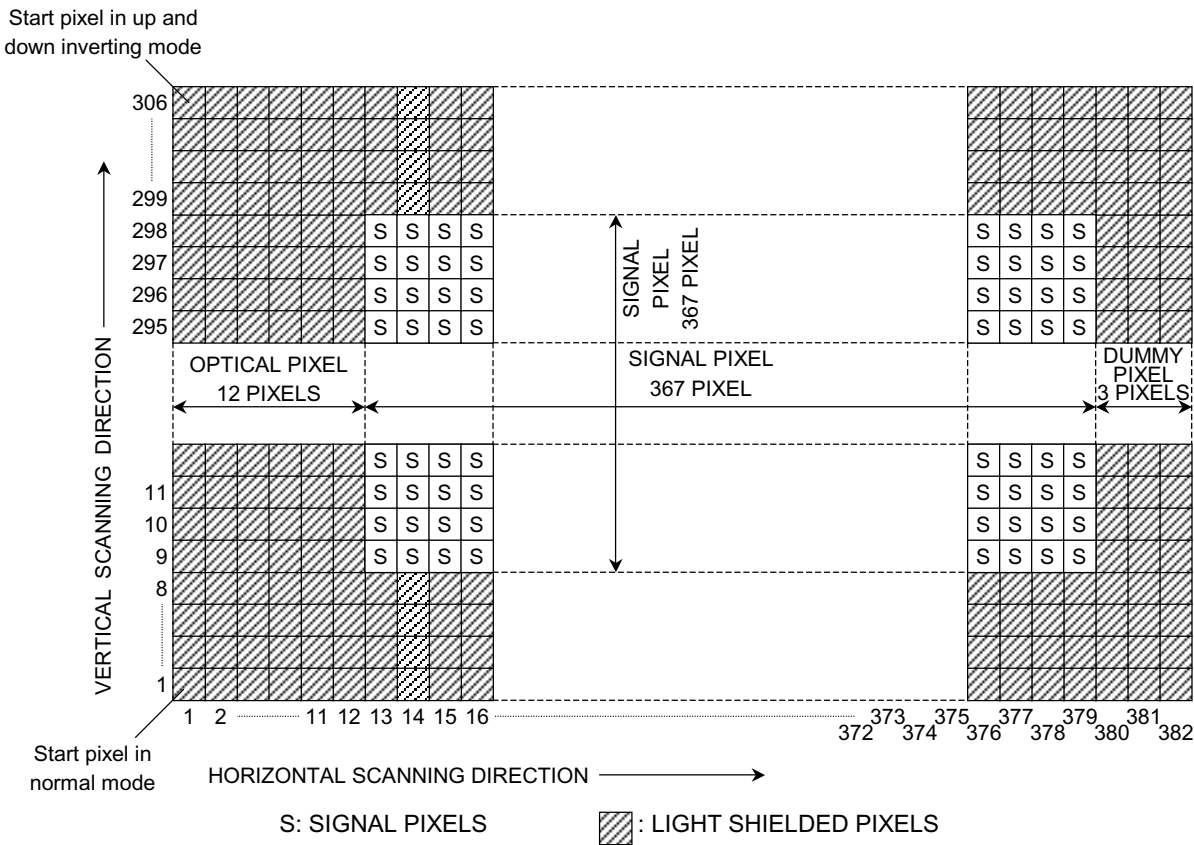


Note2: Indicates pixel arrangement on the chip.

Drive Timing Diagram Progressive Scanning Mode (30 Hz, 1 V = 300 H)


(1) V Blanking

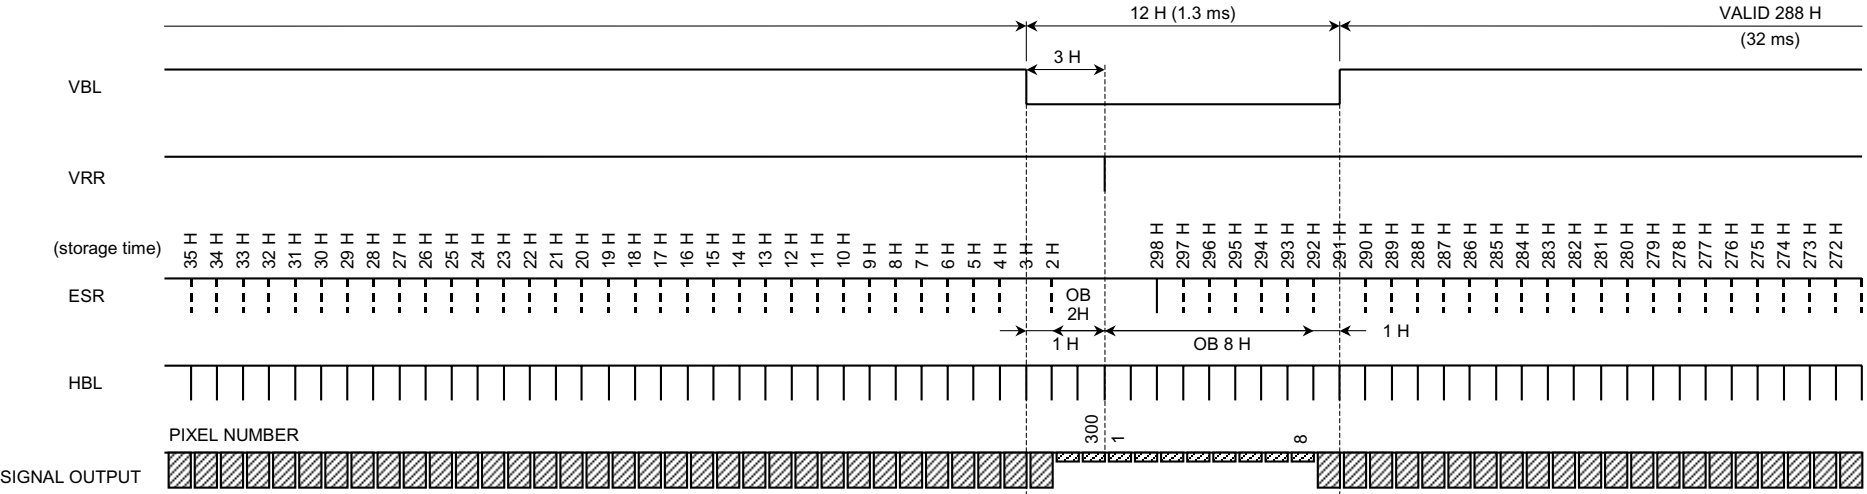

(2) H Blanking

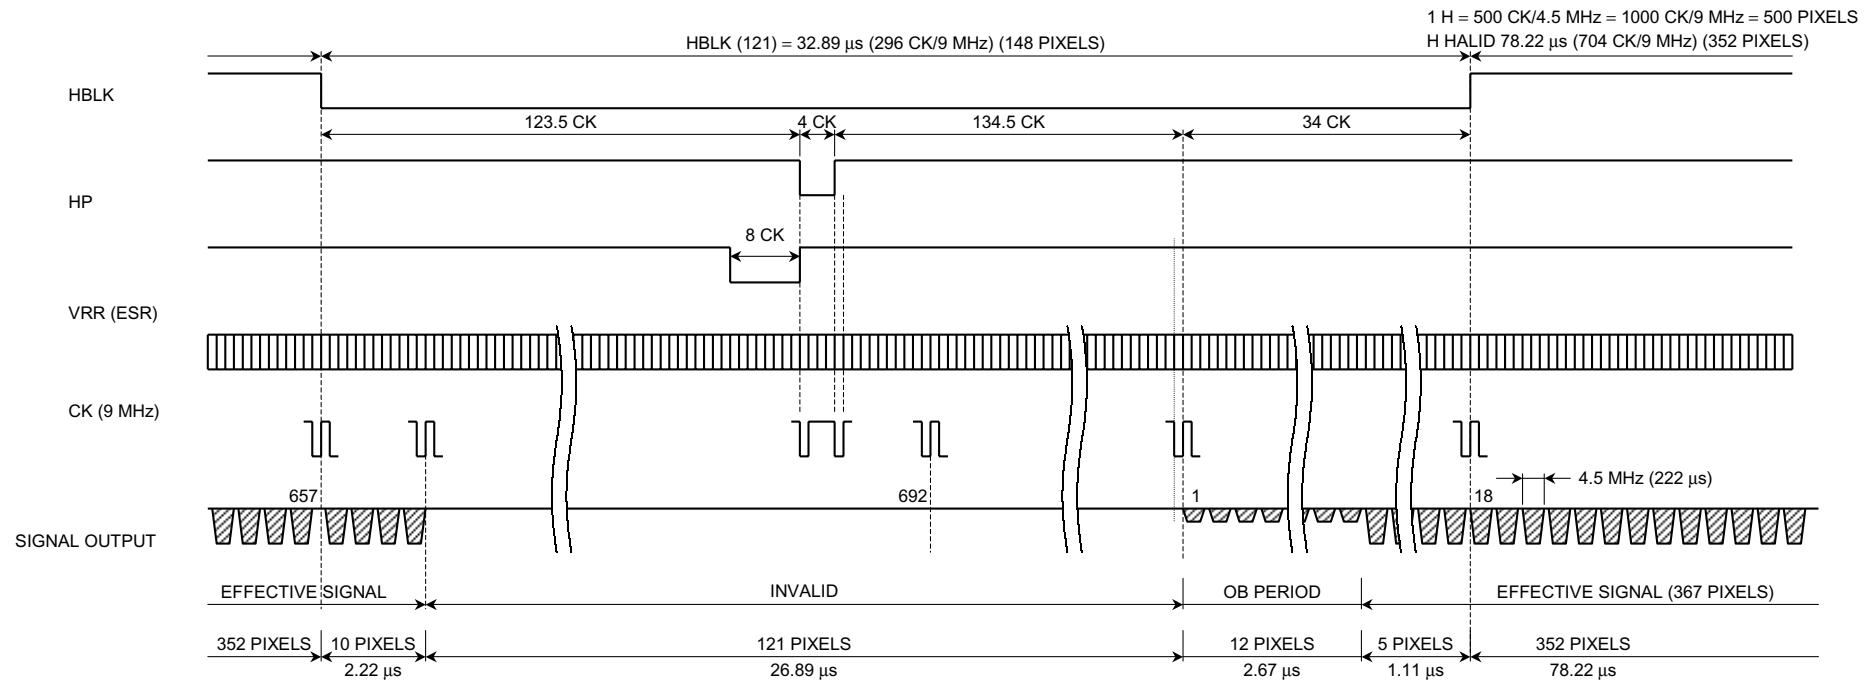


Drive Timing Diagram

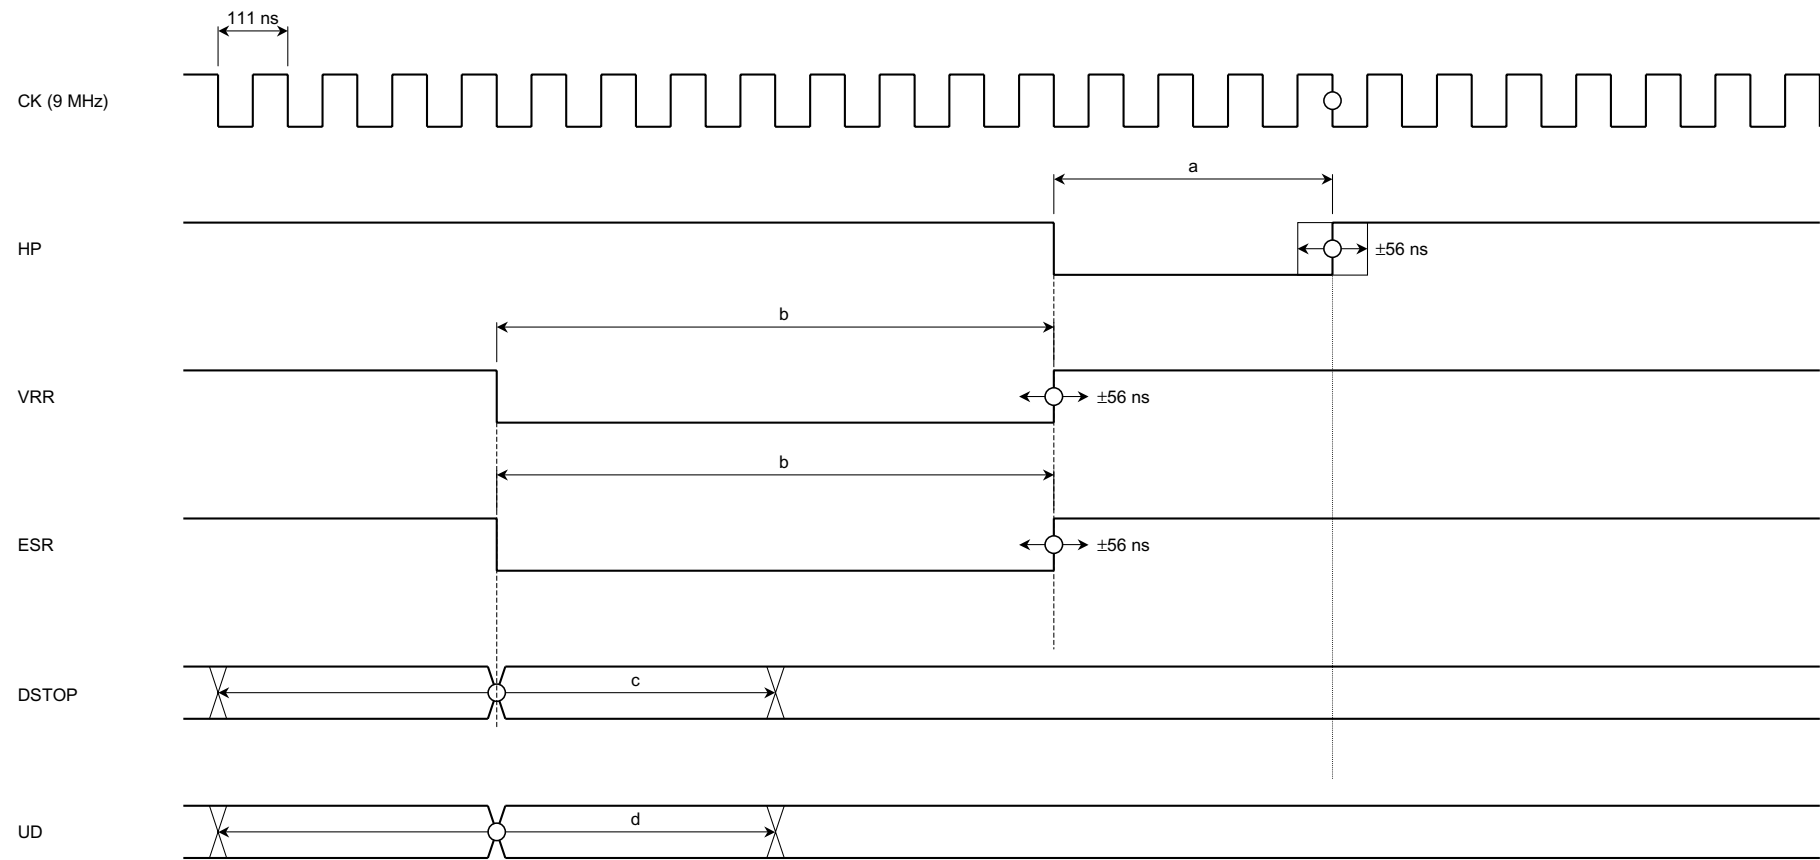

Note3: ○ is basic point.
Note4: DSTOP should be changed after VRR (ESR).

Timing Margin (ns)

	Min	Typ.	Max
a	111	444	
b	222	888	
c	-444	0	444
d	-444	0	444

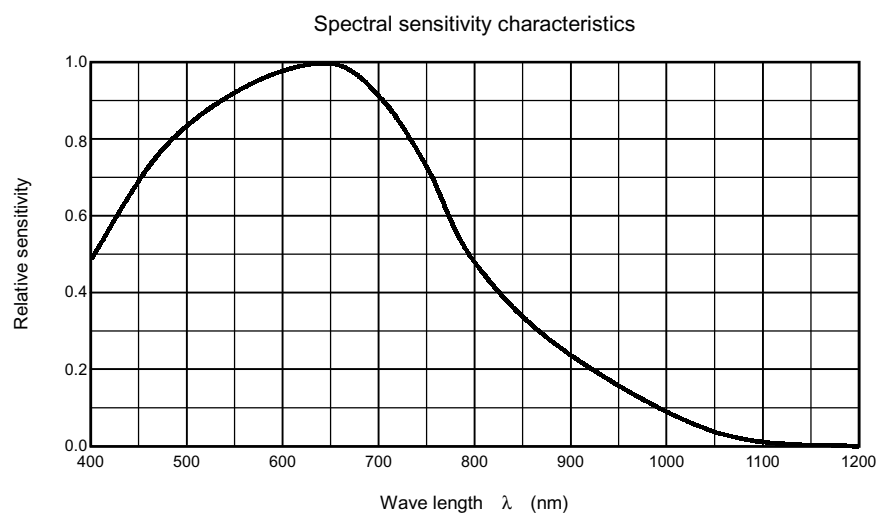

WQFN16-C-S420-160A

[illegible]

2001-06-07

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.