

(TLP251)

INVERTER FOR AIR CONDITIONOR
 INDUCTION HEATING
 TRANSISTOR INVERTER
 POWER MOS FET GATE DRIVE
 IGBT GATE DRIVE

The Toshiba TLP251 consists of a GaAlAs light emitting diode and a integrated photodetector.


This unit is 8-lead DIP package.

TLP251 is suitable for gate driving circuit of IGBT or power MOS FET. Especially TLP251 is capable of "direct" gate drive of lower power IGBTs. (~15A)

*** Target Specifications ***


- Input Threshold Current : $I_F = 5\text{mA}$ (Max.)
- Supply Current (I_{CC}) : 11mA (Max.)
- Supply Voltage (V_{CC}) : 10–35V
- Output Current (I_O) : $\pm 0.1\text{A}$ (Min.)
- Switching Time (t_{pLH}/t_{pHL}) : $1\mu\text{s}$ (Max.)
- Isolation Voltage : 2500Vrms (Min.)

Unit in mm

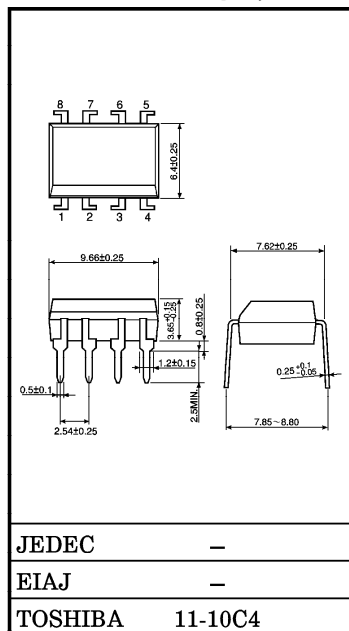

Weight : 0.54g

SCHMATIC

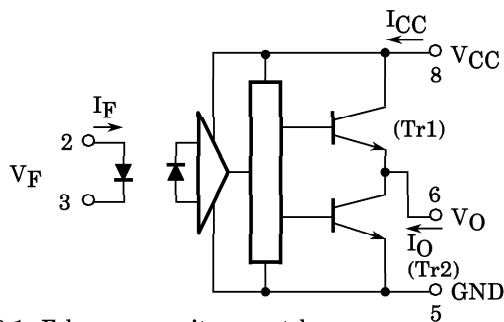


A 0.1 μF bypass capacitor must be connected between pin 8 and 5 (See note 5).

TRUTH TABLE

		Tr1	Tr2
Input LED	ON	ON	OFF
	OFF	OFF	ON

PIN CONFIGURATION (TOP VIEW)



- 1 : N.C.
- 2 : ANODE
- 3 : CATHODE
- 4 : N.C.
- 5 : GND
- 6 : V_O (OUTPUT)
- 7 : N.C.
- 8 : V_{CC}

© The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

© These TOSHIBA products are intended for use in general commercial applications (office equipment, communication equipment, measuring equipment, domestic appliances, etc.), please make sure that you consult with us before you use these TOSHIBA products in equipment which requires extraordinarily high quality and/or reliability, and in equipment which may involve life threatening or critical application, including but not limited to such uses as atomic energy control, airplane or spaceship instrumentation, traffic signals, medical instrumentation, combustion control, all types of safety devices, etc. TOSHIBA cannot accept and hereby disclaims liability for any damage which may occur in case the TOSHIBA products are used in such equipment or applications without prior consultation with TOSHIBA.

(TLP251)

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC			SYMBOL	RATING	UNIT
LED	Forward Current		I _F	20	mA
	Forward Current Derating (Ta≥ 70℃)		ΔI _F / ΔTa	−0.36	mA / °C
	Peak Transient Forward Curent (Note 1)		I _{FPT}	1	A
	Reverse Voltage		V _R	5	V
	Junction Temperature		(T _J)	125	°C
DETECTOR	“H” Peak Output Current (P _W ≤ 2.0μs, f≤ 15kHz)(Note 2)		I _{OPH}	−0.4	A
	“L” Peak Output Current (P _W ≤ 2.0μs, f≤ 15kHz)(Note 2)		I _{OPL}	+0.4	A
	Output Voltage	(Ta≤ 70℃)	V _O	35	V
		(Ta= 85℃)		24	
	Supply Voltage	(Ta≤ 70℃)	V _{CC}	35	V
		(Ta= 85℃)		24	
	Output Voltage Derating (Ta≥ 70℃)		ΔV _O / ΔTa	−0.73	V / °C
	Supply Voltage Derating (Ta≥ 70℃)		ΔV _{CC} / ΔTa	−0.73	V / °C
	Junction Temperature		(T _J)	125	°C
	Operating Frequency (Note 3)		f	25	kHz
Operating Temperature Range			T _{opr}	−20~85	°C
Storage Temperature Range			T _{stg}	−55~125	°C
Lead Solder Temperature (10s)			T _{sol}	260	°C
Isolation Voltage (AC, 1min., R.H.≤ 60%, Ta= 25℃) (Note 4)			BV _S	2500	Vrms

Note 1 : Pulse width P_W ≤ 1 μs, 300pps

Note 2 : Exponential Waveform

Note 3 : Exponential Waveform, I_{OPH} ≤ −0.25A (≤ 2.0 μs), I_{OPL} ≤ +0.25A (≤ 2.0 μs)

Note 4 : Device considered a two terminal device : pins 1,2,3 and 4 shorted together, and pins 5, 6, 7 and 8 shorted together.

Note 5 : A ceramic capacitor (0.1 μF) should be connected from pin 8 to pin 5 to stabilize the operation of the high gain linear amplifier. Failure to provide the bypassing may impair the switching property. The total lead length between capacitor and coupler should not exceed 1cm.

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.		UNIT
Input Current, ON	I _F (ON)	7	8	10		mA
Input Voltage, OFF	V _F (OFF)	0	—	0.8		V
Supply Voltage	V _{CC}	10	—	30	20	V
Peak Output Current	I _{OPH} / I _{OPL}	—	—	±0.1		A
Operating Temperature	T _{opr}	−20	25	70	85	°C

TLP251 – 2

1996 – 4 – 8

TOSHIBA CORPORATION

(TLP251)

ELECTRICAL CHARACTERISTICS (Ta = -20~70°C, Unless otherwise specified)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.*	MAX.	UNIT
Input Forward Voltage		V _F	—	I _F = 10mA, Ta = 25°C	—	1.6	1.8	V
Temperature Coefficient of Forward Voltage		ΔV _F / ΔTa	—	I _F = 10mA	—	-2.0	—	mV / °C
Input Reverse Current		I _R	—	V _R = 5V, Ta = 25°C	—	—	10	μA
Input Capacitance		C _T	—	V = 0, f = 1MHz, Ta = 25°C	—	45	250	pF
Output Current	“H” Level	I _{OPH}	3	V _{CC} = 30V (*1) I _F = 10mA V ₈₋₆ = 4V I _F = 0 V ₆₋₅ = 2.5V	-0.1	-0.25	—	A
	“L” Level	I _{OPL}	2		0.1	0.2	—	
Output Voltage	“H” Level	V _{OH}	4	V _{CC1} = +15V, V _{EE1} = -15V R _L = 200Ω, I _F = 5mA	11	13.2	—	V
	“L” Level	V _{OL}	5	V _{CC1} = +15V, V _{EE1} = -15V R _L = 200Ω, V _F = 0.8V	—	-14.5	-12.5	
Supply Current	“H” Level	I _{CCH}	—	V _{CC} = 30V, I _F = 10mA Ta = 25°C	—	7.5	—	mA
				V _{CC} = 30V, I _F = 10mA	—	—	11	
	“L” Level	I _{CCL}	—	V _{CC} = 30V, I _F = 0mA Ta = 25°C	—	8	—	
				V _{CC} = 30V, I _F = 0mA	—	—	11	
Threshold Input Current	“Output L→H”	I _{FLH}	—	V _{CC1} = +15V, V _{EE1} = -15V R _L = 200Ω, V _O > 0V	—	1.2	5	mA
Threshold Input Voltage	“Output H→L”	V _{FHL}	—	V _{CC1} = +15V, V _{EE1} = -15V R _L = 200Ω, V _O < 0V	0.8	—	—	V
Supply Voltage		V _{CC}	—		10	—	35	V
Capacitance (Input-Output)		C _s	—	V _s = 0, f = 1MHz Ta = 25°C	—	1.0	2.0	pF
Resistance (Input-Output)		R _s	—	V _s = 500V, Ta = 25°C R.H. ≤ 60%	5 × 10 ¹⁰	10 ¹²	—	Ω

* All typical values are at Ta = 25°C (*1) : Duration of I_O time ≤ 50μs

(TLP251)

SWITCHING CHARACTERISTICS (Ta = -20~70°C, Unless otherwise specified)

CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.*	MAX.	UNIT
Propagation Delay Time	L→H	t _{pLH}	6	I _F = 8mA V _{CC1} = +15V, V _{EE1} = -15V R _L = 200Ω	—	0.25	1.0	μs
	H→L	t _{pHL}			—	0.25	1.0	
Output Rise Time		t _r			—		—	
Output Fall Time		t _f			—		—	
Common Mode Transient Immunity at High Level Output		C _{MH}	7	V _{CM} = 600V, I _F = 8mA V _{CC} = 30V, Ta = 25°C	-5000	—	—	V / μs
Common Mode Transient Immunity at Low Level Output		C _{ML}	7	V _{CM} = 600V, I _F = 0mA V _{CC} = 30V, Ta = 25°C	5000	—	—	V / μs

* All typical values are at Ta = 25°C


TLP251 - 4

1996 - 4 - 8


TOSHIBA CORPORATION

(TLP251)


TEST CIRCUIT 1 :




TEST CIRCUIT 2 : I_{OPL}

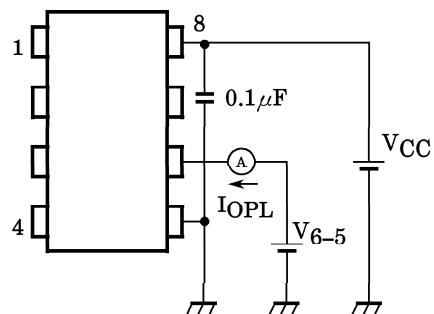


TEST CIRCUIT 3 : I_{OPH}

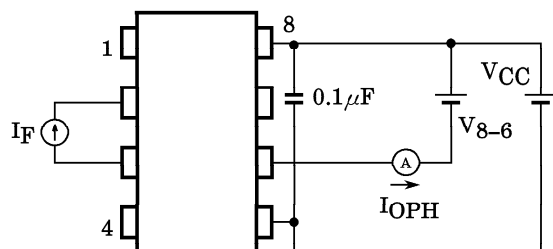

TEST CIRCUIT 4 : V_{OH}

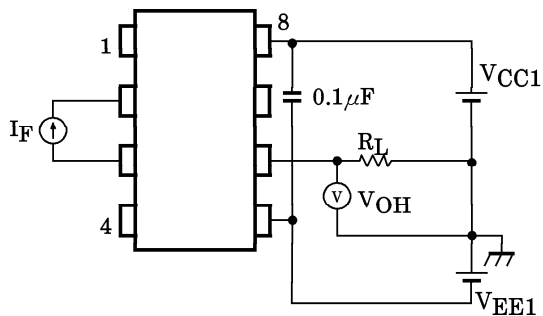

TEST CIRCUIT 5 : V_{OL}

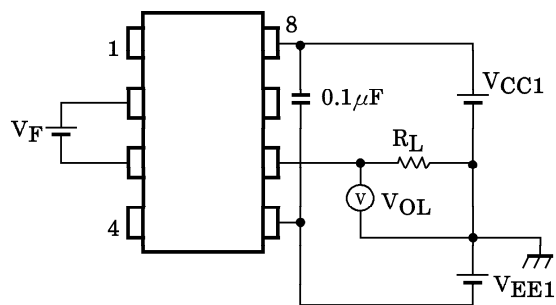



TLP251 - 5

1996 - 4 - 8



TOSHIBA CORPORATION

(TLP251)

TEST CIRCUIT 6 : t_{pLH} , t_{pHL} , t_r , t_f

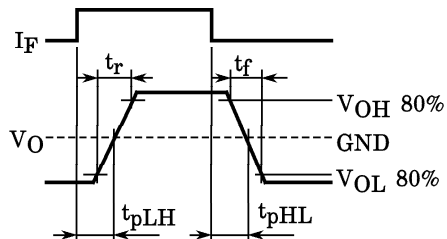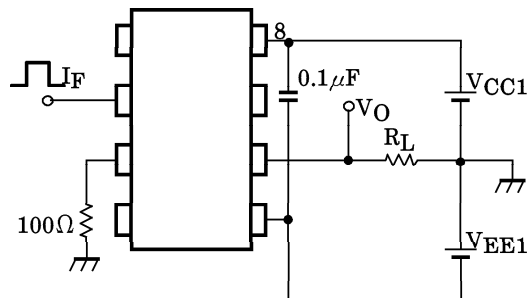

TEST CIRCUIT 7 : C_{MH} , C_{ML}




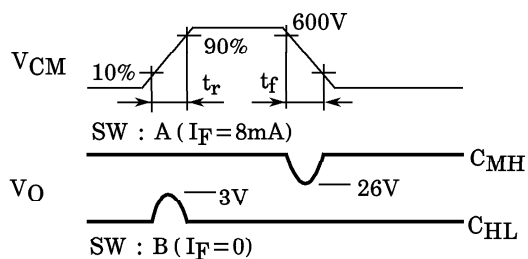
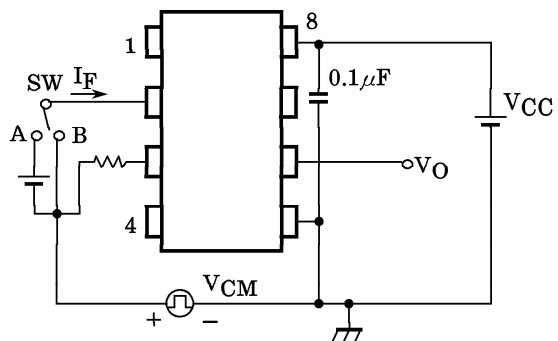


$$C_{ML} = \frac{480(V)}{t_r(\mu s)}$$

$$C_{MH} = \frac{480(V)}{t_f(\mu s)}$$

C_{ML} (C_{MH}) is the maximum rate of rise (fall) of the common mode voltage that can be sustained with the output voltage in the low (high) state.

(TLP251)

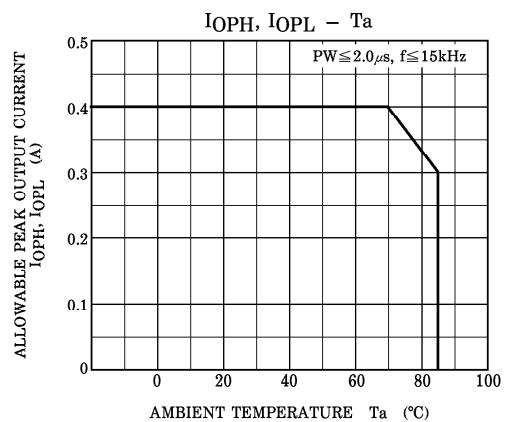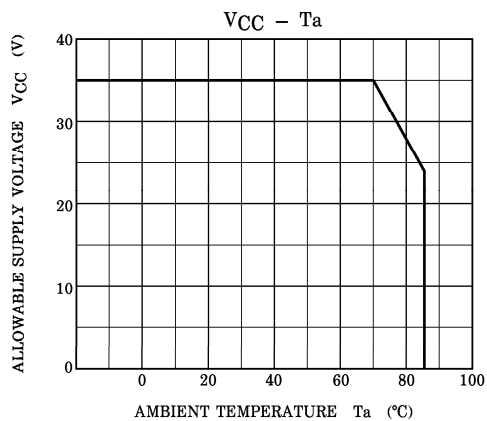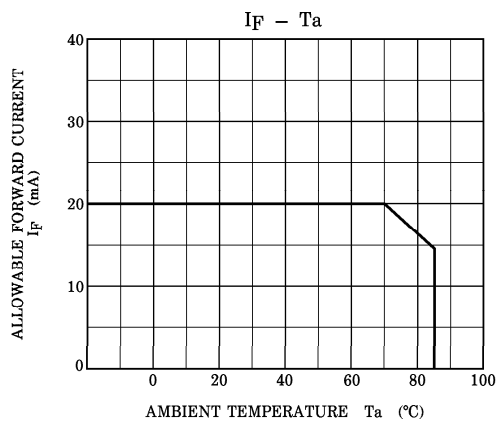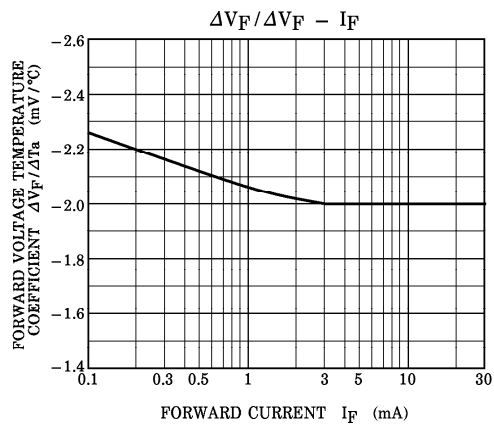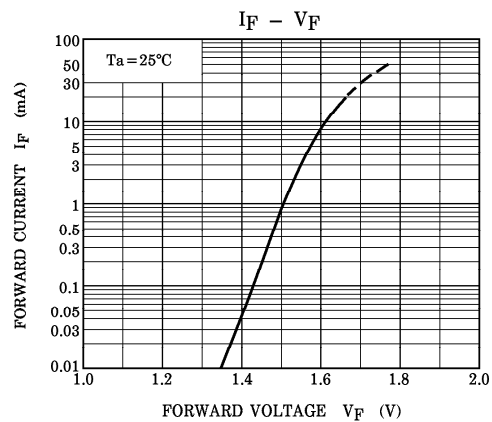

TLP251 - 7*

1996 - 4 - 8

TOSHIBA CORPORATION