

**TIL197, TIL198, TIL199
TIL197A, TIL198A, TIL199A
TIL197B, TIL198B, TIL199B**



HIGH DENSITY MOUNTING PHOTODARLINGTON OPTICALLY COUPLED ISOLATORS

APPROVALS

- UL recognised, File No. E91231

'X' SPECIFICATION APPROVALS

- VDE 0884 approval pending
 - Certified to EN60950 by the following Test Bodies :-
Nemko - Certificate No. P96102022
Fimko - Registration No. 192313-01..25
Semko - Reference No. 9639052 01
Demko - Reference No. 305969

DESCRIPTION



The TIL197, TIL198, TIL199 series of optically coupled isolators consist of infrared light emitting diodes and NPN silicon photo darlingtons in space efficient dual in line plastic packages. The standard parts TIL197, TIL198, TIL199 are tested for a CTR of 500% minimum. Parts with the suffix A or B are tested for a CTR of 1000 and 1500% minimum respectively.

FEATURES

- Options :-
10mm lead spread - add G after part no.
Surface mount - add SM after part no.
Tape&reel - add SMT&R after part no.
 - High Current Transfer Ratio (500% min)
 - High Isolation Voltage (5.3kV_{RMS}, 7.5kV_{PK})
 - All electrical parameters 100% tested
 - Custom electrical selections available

Custom circuit APPLICATIONS

- Computer terminals
 - Industrial systems controllers
 - Measuring instruments
 - Signal transmission between systems of different potentials and impedances

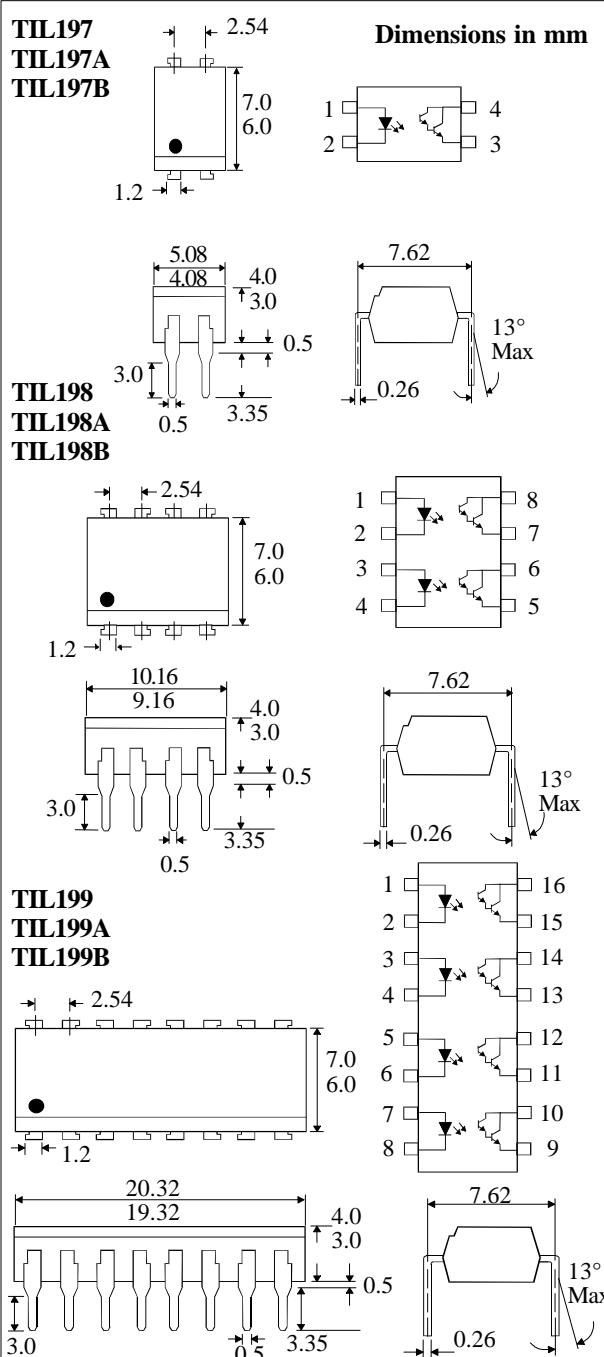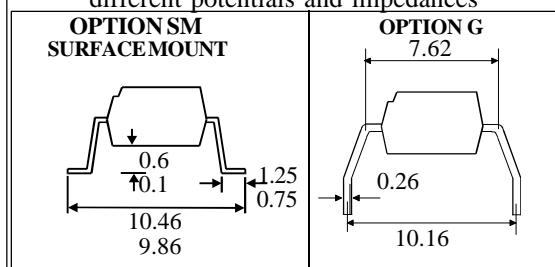

ISOCOM COMPONENTS LTD
Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax : (01429) 863581

ISOCOM INC
1024 S. Greenville Ave, Suite 240,
Allen, TX 75002 USA
Tel: (214) 495-0755 Fax: (214) 495-0901
e-mail info@isocom.com
<http://www.isocom.com>

ABSOLUTE MAXIMUM RATINGS
(25°C unless otherwise specified)

Storage Temperature	—	-55°C to + 125°C
Operating Temperature	—	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	—	260°C

INPUT DIODE

Forward Current	—	50mA
Reverse Voltage	—	6V
Power Dissipation	—	70mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV _{CEO}	—	35V
Emitter-collector Voltage BV _{ECO}	—	6V
Power Dissipation	—	150mW

POWER DISSIPATION

Total Power Dissipation	—	200mW
(derate linearly 2.67mW/°C above 25°C)		

ELECTRICAL CHARACTERISTICS (T_A = 25°C Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V _F) Reverse Voltage (V _R) Reverse Current (I _R)	5	1.2	1.4	V V μA	I _F = 20mA I _R = 10μA V _R = 5V
Output	Collector-emitter Breakdown (BV _{CEO}) (Note 2) Emitter-collector Breakdown (BV _{ECO}) Collector-emitter Dark Current (I _{CEO})	35			V	I _C = 0.5mA
		6		100	V nA	I _E = 100μA V _{CE} = 10V
Coupled	Current Transfer Ratio (CTR) (Note 2) TIL197, TIL198, TIL199 TIL197A, TIL198A, TIL199A TIL197B, TIL198B, TIL199B Collector-emitter Saturation Voltage V _{CE (SAT)} Input to Output Isolation Voltage V _{ISO} Input-output Isolation Resistance R _{ISO} Output Rise Time tr Output Fall Time tf	500 1000 1500	0.8	7500 7500 7500		2mA I _F , 1V V _{CE} 2mA I _F , 1V V _{CE} 2mA I _F , 1V V _{CE} 2mA I _F , 10mA I _C See note 1 See note 1 V _{IO} = 500V (note 1) V _{CC} = 10V , I _C = 10mA, R _L = 100Ω

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.

