

TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

TC4511BP, TC4511BF

TC4511B BCD – TO – SEVEN SEGMENT LATCH / DECODER / DRIVER


TC4511B is decoder which converts the input of BCD code into the 7 segment display element driving signal and the output has complementary connection of NPN bipolar transistor and N-channel MOS FET. Therefore, not only capability of directly driving cathode common type LED, this has capability of driving various display elements with simple interface circuits. $\overline{LT}$ input and $\overline{BI}$ input are to force all the outputs to be “H” (illuminated) and “L” (not illuminated) respectively regardless of BCD input. As the latch controlled by common LE input is inserted in each of four input lines, static display of dynamic information can be achieved. When an invalid BCD input, “10” or higher is applied, all the outputs become “L” (not illuminated).

MAXIMUM RATINGS


CHARACTERISTIC	SYMBOL	RATING	UNIT
DC Supply Voltage	V_{DD}	$V_{SS} - 0.5 \sim V_{SS} + 20$	V
Input Voltage	V_{IN}	$V_{SS} - 0.5 \sim V_{DD} + 0.5$	V
Output Voltage	V_{OUT}	$V_{SS} - 0.5 \sim V_{DD} + 0.5$	V
DC Input Current	I_{IN}	± 10	mA
Output High Current	I_{OH}	- 50	mA
Power Dissipation	P_D	300 (DIP) / 180 (SOIC)	mW
Operating Temperature Range	T_{opr}	- 40~85	°C
Storage Temperature Range	T_{stg}	- 65~150	°C

TRUTH TABLE

INPUT							OUTPUT							DISPLAY
LE	BI	LT	D	C	B	A	a	b	c	d	e	f	g	MODE
*	*	L	*	*	*	*	H	H	H	H	H	H	H	8
*	L	H	*	*	*	*	L	L	L	L	L	L	L	BLANK
L	H	H	L	L	L	L	H	H	H	H	H	H	L	0
L	H	H	L	L	L	H	L	H	H	L	L	L	L	1
L	H	H	L	L	H	L	H	H	L	H	H	L	H	2
L	H	H	L	L	H	H	H	H	H	L	L	L	H	3
L	H	H	L	H	L	L	L	H	H	L	L	H	H	4
L	H	H	L	H	L	H	H	L	H	H	L	H	H	5
L	H	H	L	H	H	L	L	L	H	H	H	H	H	6
L	H	H	L	H	H	H	H	H	H	L	L	L	L	7
L	H	H	H	L	L	L	H	H	H	H	H	H	H	8
L	H	H	H	L	L	H	H	H	H	L	L	H	H	9
L	H	H	H	L	H	L	L	L	L	L	L	L	L	BLANK
L	H	H	H	L	H	H	L	L	L	L	L	L	L	BLANK
L	H	H	H	H	*	*	L	L	L	L	L	L	L	BLANK
H	H	H	*	*	*	*	△△							
* : DON'T CARE														
△△ : DEPENDS UPON THE BCD CODE PREVIOUSLY APPLIED WHEN LE “L”														




P (DIP16-P-300-2.54A)
Weight : 1.00g (Typ.)




F (SOP16-P-300-1.27)
Weight : 0.18g (Typ.)

PIN ASSIGNMENT

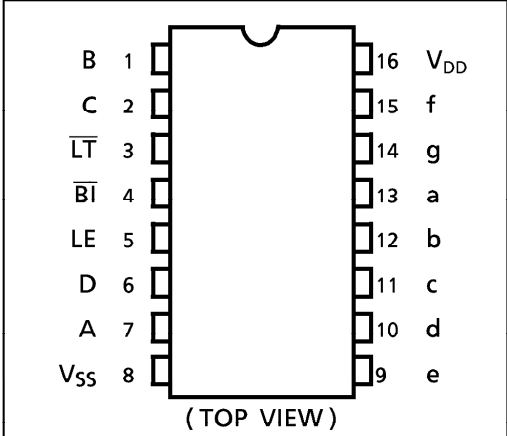


DISPLAY

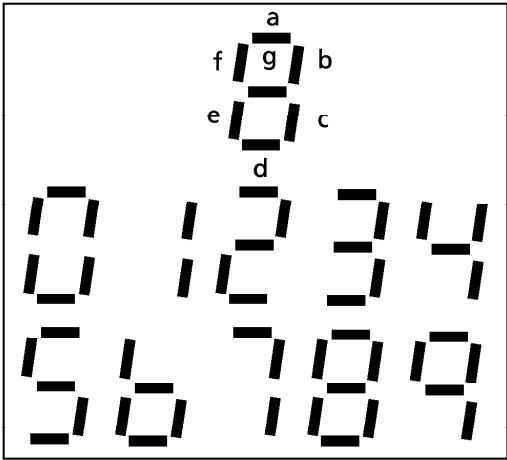

961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

LOGIC DIAGRAM

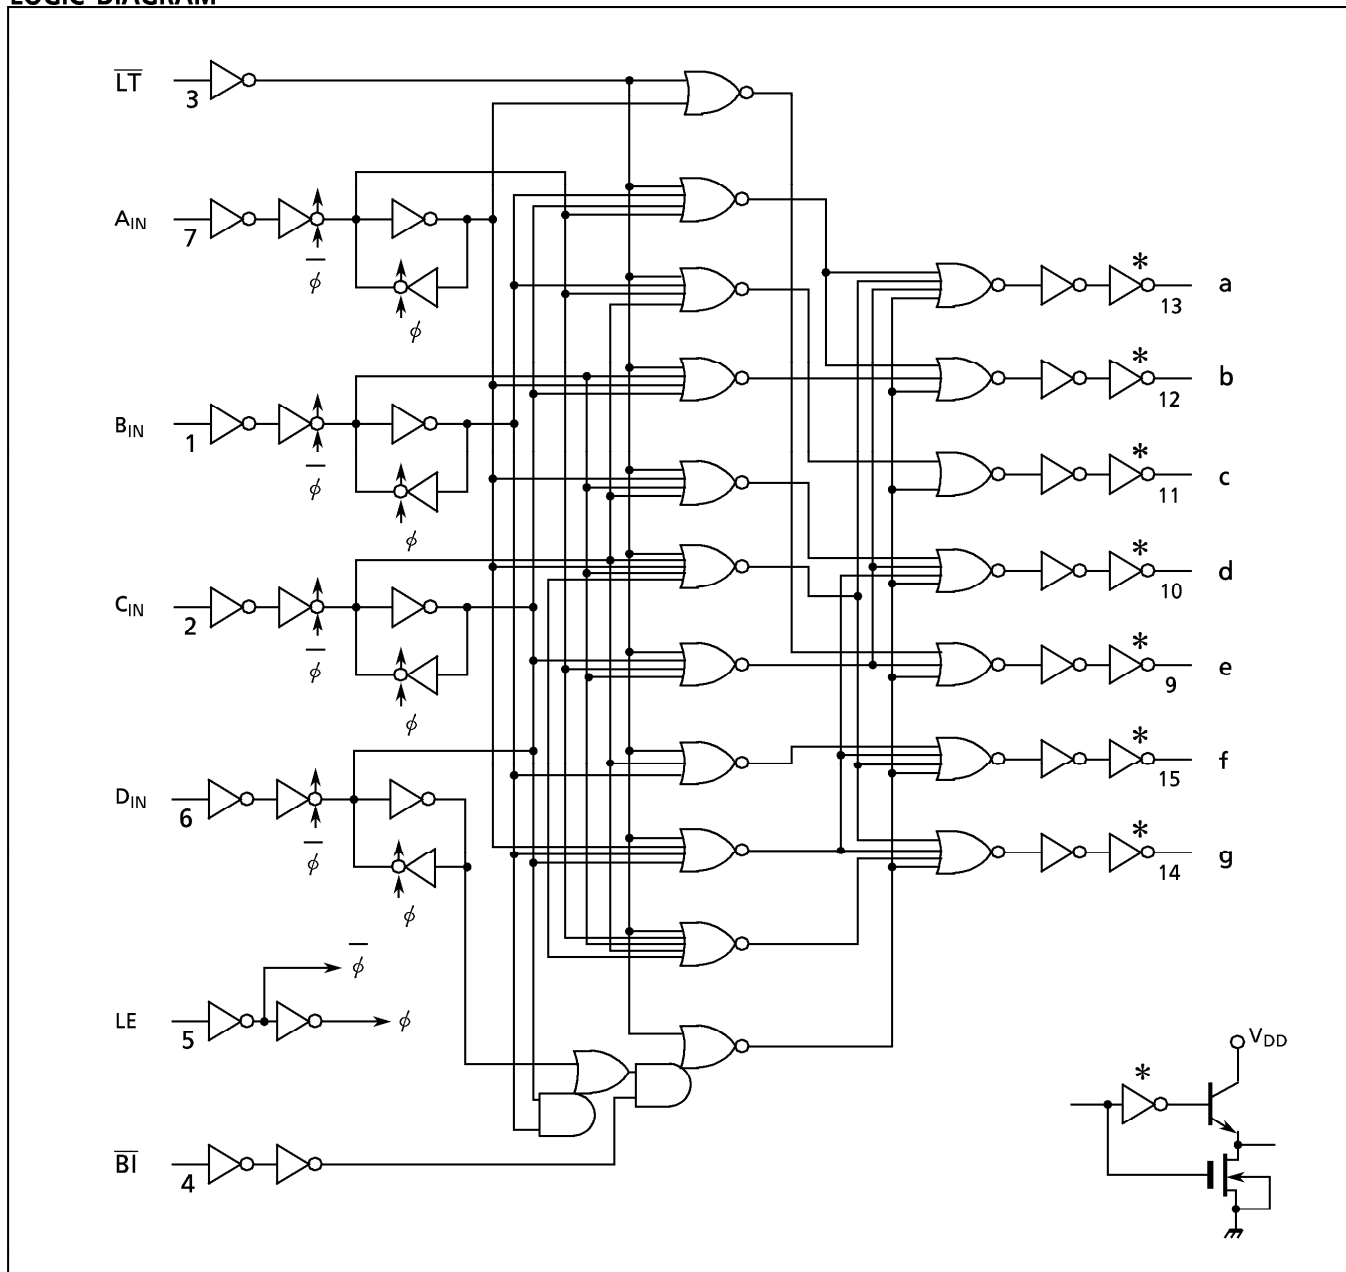

961001EBA2'

- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

RECOMMENDED OPERATING CONDITIONS ($V_{SS} = 0V$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
DC Supply Voltage	V_{DD}		3	—	18	V
Input Voltage	V_{IN}		0	—	V_{DD}	V

STATIC ELECTRICAL CHARACTERISTICS ($V_{SS} = 0V$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	V_{DD} (V)	- 40°C		25°C			85°C		UNIT
				MIN.	MAX.	MIN.	TYP.	MAX.	MIN.	MAX.	
High-Level Output Voltage	V_{OH}	$ I_{OUT} < 1\mu A$ $V_{IN} = V_{SS}, V_{DD}$	5 10 15	4.1 9.1 14.1	— — —	4.1 9.1 14.1	4.41 9.41 14.41	— — —	4.2 9.2 14.2	— — —	V
Low-Level Output Voltage	V_{OL}	$ I_{OUT} < 1\mu A$ $V_{IN} = V_{SS}, V_{DD}$	5 10 15	— — —	0.05 0.05 0.05	— — —	0.00 0.00 0.00	0.05 0.05 0.05	— — —	0.05 0.05 0.05	
Output High Voltage	V_{OH}	$I_{OH} = 0mA$ $I_{OH} = 10mA$ $I_{OH} = 20mA$ $V_{IN} = V_{DD}, V_{SS}$	5	4.10 3.90 3.55	— — —	4.10 3.90 3.55	4.41 4.25 4.19	— — —	4.20 3.90 3.30	— — —	V
		$I_{OH} = 0mA$ $I_{OH} = 10mA$ $I_{OH} = 20mA$ $V_{IN} = V_{DD}, V_{SS}$	10	9.10 9.00 8.70	— — —	9.10 9.00 8.70	9.41 9.25 9.20	— — —	9.20 9.00 8.40	— — —	
		$I_{OH} = 0mA$ $I_{OH} = 10mA$ $I_{OH} = 20mA$ $V_{IN} = V_{DD}, V_{SS}$	15	14.10 14.00 13.75	— — —	14.10 14.00 13.75	14.41 14.26 14.21	— — —	14.20 14.00 13.50	— — —	
		$V_{OUT} = 0.4V$ $V_{OUT} = 0.5V$ $V_{OUT} = 1.5V$ $V_{IN} = V_{DD}, V_{SS}$	5 10 15	0.61 1.5 4.0	— — —	0.51 1.3 3.4	1.2 3.2 12.0	— — —	0.42 1.1 2.8	— — —	
		$V_{OUT} = 0.5V, 4.5V$ $V_{OUT} = 1.0V, 9.0V$ $V_{OUT} = 1.5V, 13.5V$ $ I_{OUT} < 1\mu A$	5 10 15	3.5 7.0 11.0	— — —	3.5 7.0 11.0	2.75 5.50 8.25	— — —	3.5 7.0 11.0	— — —	
		$V_{OUT} = 0.5V, 4.5V$ $V_{OUT} = 1.0V, 9.0V$ $V_{OUT} = 1.5V, 13.5V$ $ I_{OUT} < 1\mu A$	5 10 15	— — —	1.5 3.0 4.0	— — —	2.25 4.5 6.75	1.5 3.0 4.0	— — —	1.5 3.0 4.0	
		$V_{OH} = 18V$	18	—	0.3	—	10^{-5}	0.3	—	1.0	
		$V_{IL} = 0V$	18	—	-0.3	—	-10^{-5}	-0.3	—	-1.0	
		$V_{IN} = V_{SS}, V_{DD} *$	5 10 15	— — —	5 10 20	— — —	0.005 0.010 0.015	5 10 20	— — —	150 300 600	


* All valid input combinations.

DYNAMIC ELECTRICAL CHARACTERISTICS (Ta = 25°C, Vss = 0V, CL = 50pF, RL = 10kΩ)


CHARACTERISTIC	SYMBOL	TEST CONDITION	V _{DD} (V)	MIN.	TYP.	MAX.	UNIT
Output Transition Time (Low to High)	t _{TLH}		5 10 15	— — —	25 15 15	80 60 50	ns
Output Transition Time (High to Low)	t _{THL}		5 10 15	— — —	70 35 30	200 100 80	
Propagation Delay Time (DATA - OUT)	t _{pLH}		5 10 15	— — —	200 90 65	1040 420 300	
Propagation Delay Time (DATA - OUT)	t _{pHL}		5 10 15	— — —	230 110 80	1040 420 300	
Propagation Delay Time (B _I - OUT)	t _{pLH}		5 10 15	— — —	75 45 35	640 260 200	
Propagation Delay Time (B _I - OUT)	t _{pHL}		5 10 15	— — —	90 50 45	640 260 200	
Propagation Delay Time (LT - OUT)	t _{pLH}		5 10 15	— — —	60 40 35	300 150 100	
Propagation Delay Time (LT - OUT)	t _{pHL}		5 10 15	— — —	75 45 35	300 150 100	
Propagation Delay Time (LE - OUT)	t _{pLH}		5 10 15	— — —	180 90 65	600 300 250	
Propagation Delay Time (LE - OUT)	t _{pHL}		5 10 15	— — —	230 110 85	600 300 250	
Min. Pulse Time (LE)	t _{WL}		5 10 15	— — —	40 20 15	300 150 120	
Min. Set - up Time (DATA - LE)	t _{SU}		5 10 15	— — —	35 15 10	150 70 40	
Min. Hold Time (DATA - LE)	t _H		5 10 15	— — —	— — —	0 0 0	
Input Capacitance	C _{IN}			—	5	7.5	pF

WAVEFORM FOR MEASUREMENT OF DYNAMIC CHARACTERISTICS


WAVEFORM 1

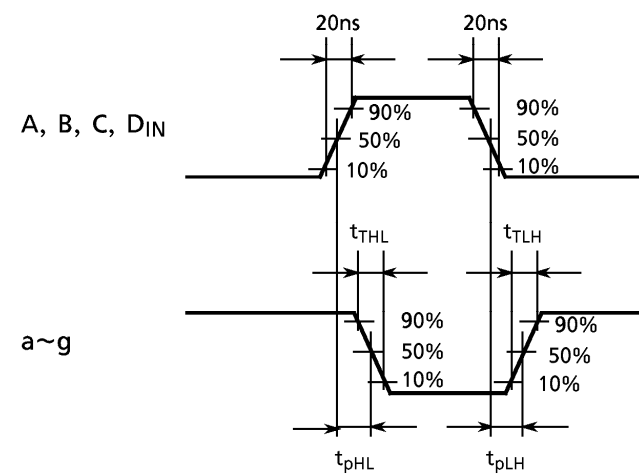


WAVEFORM 2

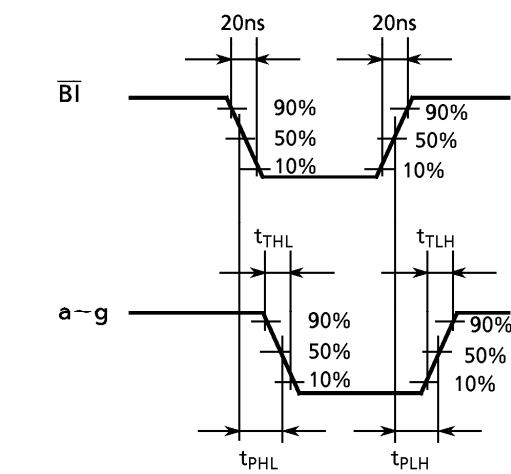

WAVEFORM 3

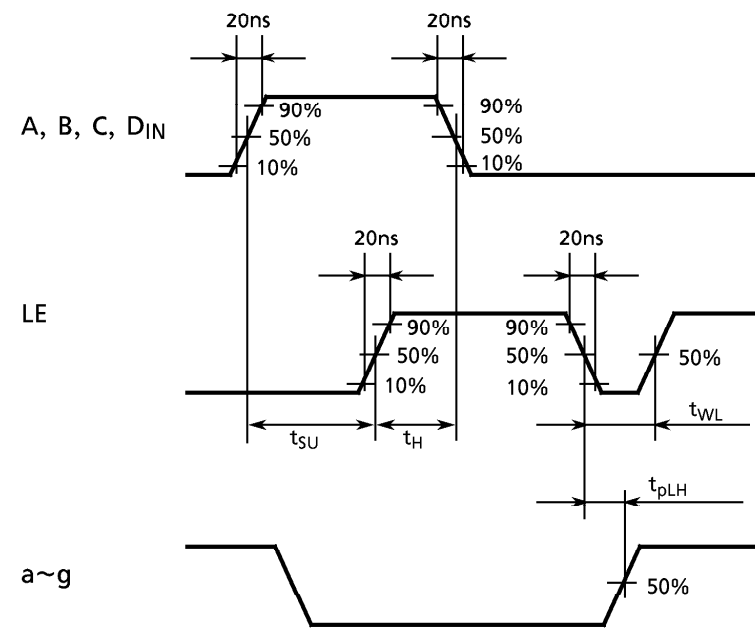


WAVEFORM 4

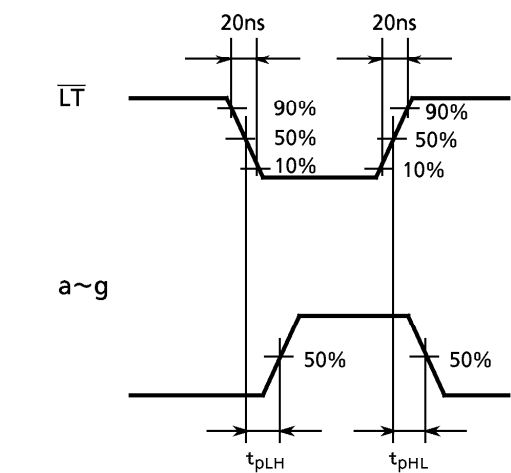

DIP 16PIN OUTLINE DRAWING (DIP16-P-300-2.54)


Unit in mm

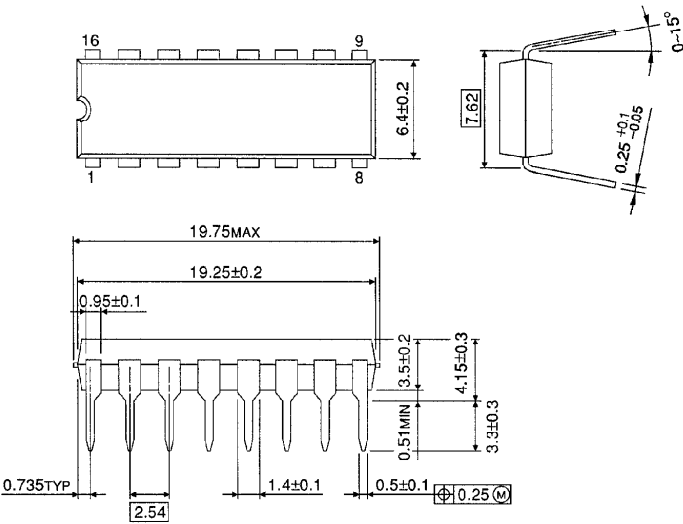

Weight : 1.00g (Typ.)

SOP 16PIN (200mil BODY) OUTLINE DRAWING (SOP16-P-300-1.27)

Unit in mm

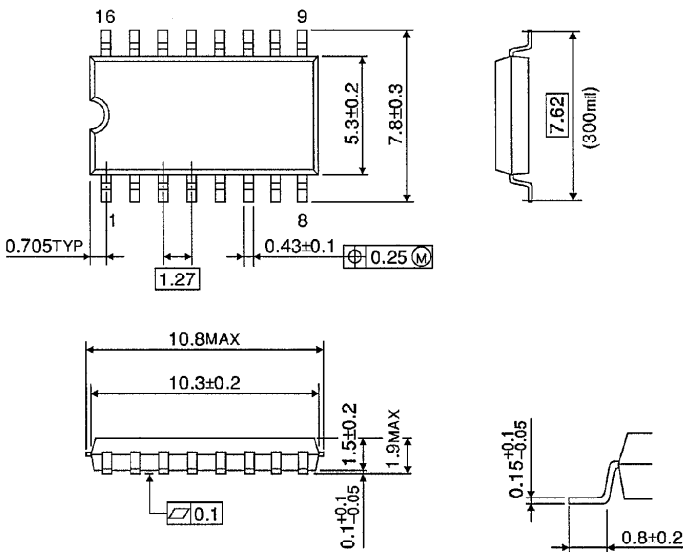

Weight : 0.18g (Typ.)