

TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

**TC74HC40102AP, TC74HC40102AF**  
**TC74HC40103AP, TC74HC40103AF**

**TC74HC40102AP/AF DUAL BCD PROGRAMMABLE DOWN COUNTER**  
**TC74HC40103AP/AF 8-BIT BINARY PROGRAMMABLE DOWN COUNTER**

The TC74HC40102A and TC74HC40103A are high speed CMOS PROGRAMMABLE DOWN COUNTERS fabricated with silicon gate C<sup>2</sup>MOS technology.

They achieve the high speed operation similar to equivalent LSTTL while maintaining the CMOS low power dissipation.


The output terminal (CO/ZD) goes to an active low state when the down count reaches zero. Since the TC74HC40102A is designed as a BCD counter, programming up to 99 counts is possible. The TC74HC40103A, with its 8-bit binary construction, can be set to provide up to 255 counts.

Both devices have Inhibit Clock (CI/CE), Asynchronous Preset Control (APE), Synchronous Preset (SPE) and Clear Control (CLR) inputs for setting the counter to the maximum counting mode.


All inputs are equipped with protection circuits against static discharge or transient excess voltage.

**FEATURES:**

- High Speed..... $f_{MAX} = 40\text{MHz}(\text{typ.})$  at  $V_{CC} = 5\text{V}$
- Low Power Dissipation..... $I_{CC} = 4\mu\text{A}(\text{Max.})$  at  $T_a = 25^\circ\text{C}$
- High Noise Immunity..... $V_{NIH} = V_{NIL} = 28\% V_{CC}(\text{Min.})$
- Output Drive Capability ..... 10 LSTTL Loads
- Symmetrical Output Impedance...  $|I_{OH}| = I_{OL} = 4\text{mA}(\text{Min.})$
- Balanced Propagation Delays..... $t_{PLH} \approx t_{PHL}$
- Wide Operating Voltage Range....  $V_{CC}(\text{opr.}) = 2\text{V} \sim 6\text{V}$
- Pin and Function Compatible with 40102B, 40103B




P (DIP16-P-300-2.54A)  
Weight : 1.00g (Typ.)



F (SOP16-P-300-1.27)  
Weight : 0.18g (Typ.)

**PIN ASSIGNMENT**

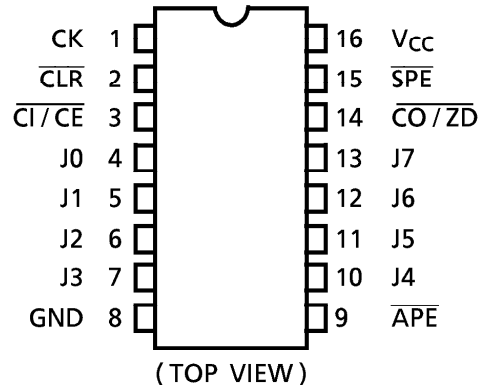

**TRUTH TABLE**

| CONTROL INPUT |     |     |       | MODE                | FUNCTIONAL DESCRIPTION                         |
|---------------|-----|-----|-------|---------------------|------------------------------------------------|
| CLR           | APE | SPE | CI/CE |                     |                                                |
| H             | H   | H   | H     | Count inhibit       | Count is inhibited regardless of other inputs. |
| H             | H   | H   | L     | Regular count       | Down count on the rising edge of CK            |
| H             | H   | L   | X     | Synchronous Preset  | Input data is preset on the rising edge of CK  |
| H             | L   | X   | X     | Asynchronous Preset | Input data is asynchronously preset to CK      |
| L             | X   | X   | X     | Clear               | Counter is set to maximum count.               |


Note 1.X : Don't care

2. Maximum count : TC74HC40102A "99", TC74HC40103A "255"


961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

IEC LOGIC SYMBOL

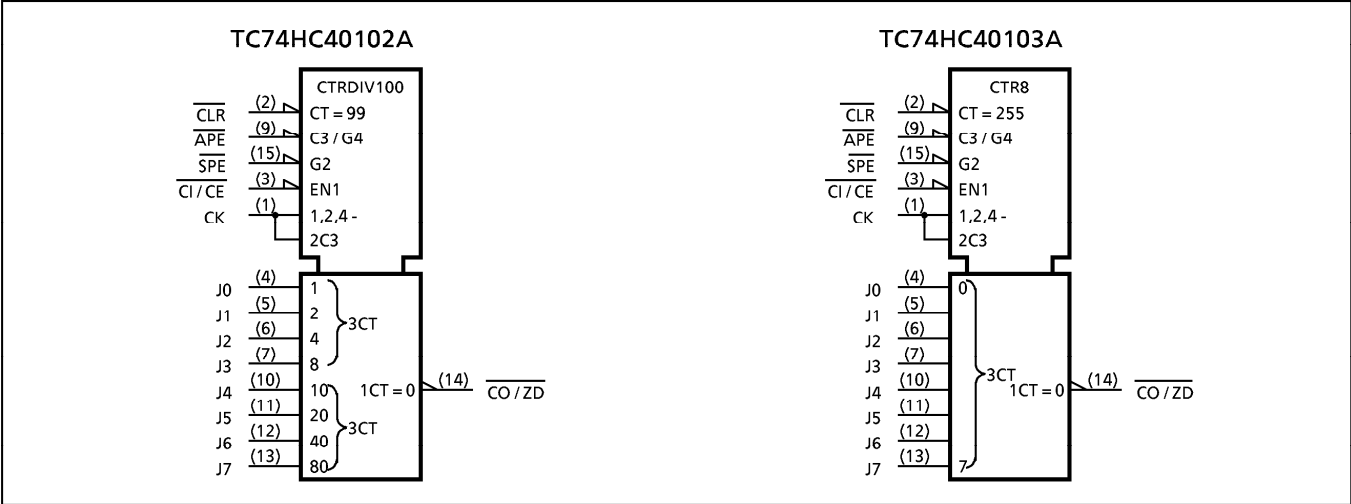


TIMING CHART

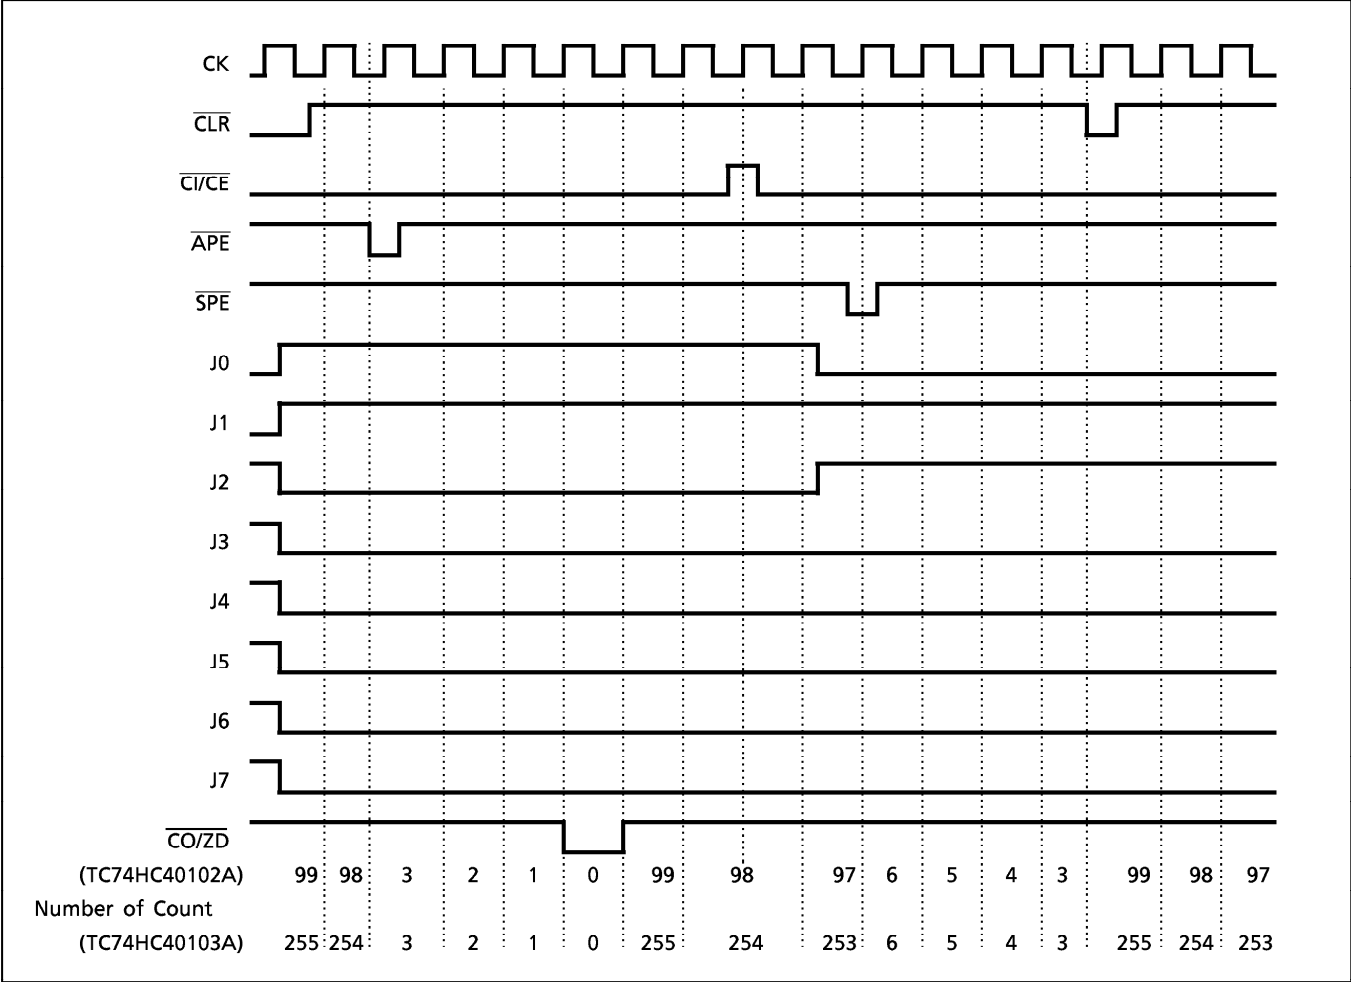


961001EBA2'

● The products described in this document are subject to foreign exchange and foreign trade control laws.  
● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.  
● The information contained herein is subject to change without notice.

## SYSTEM DIAGRAM

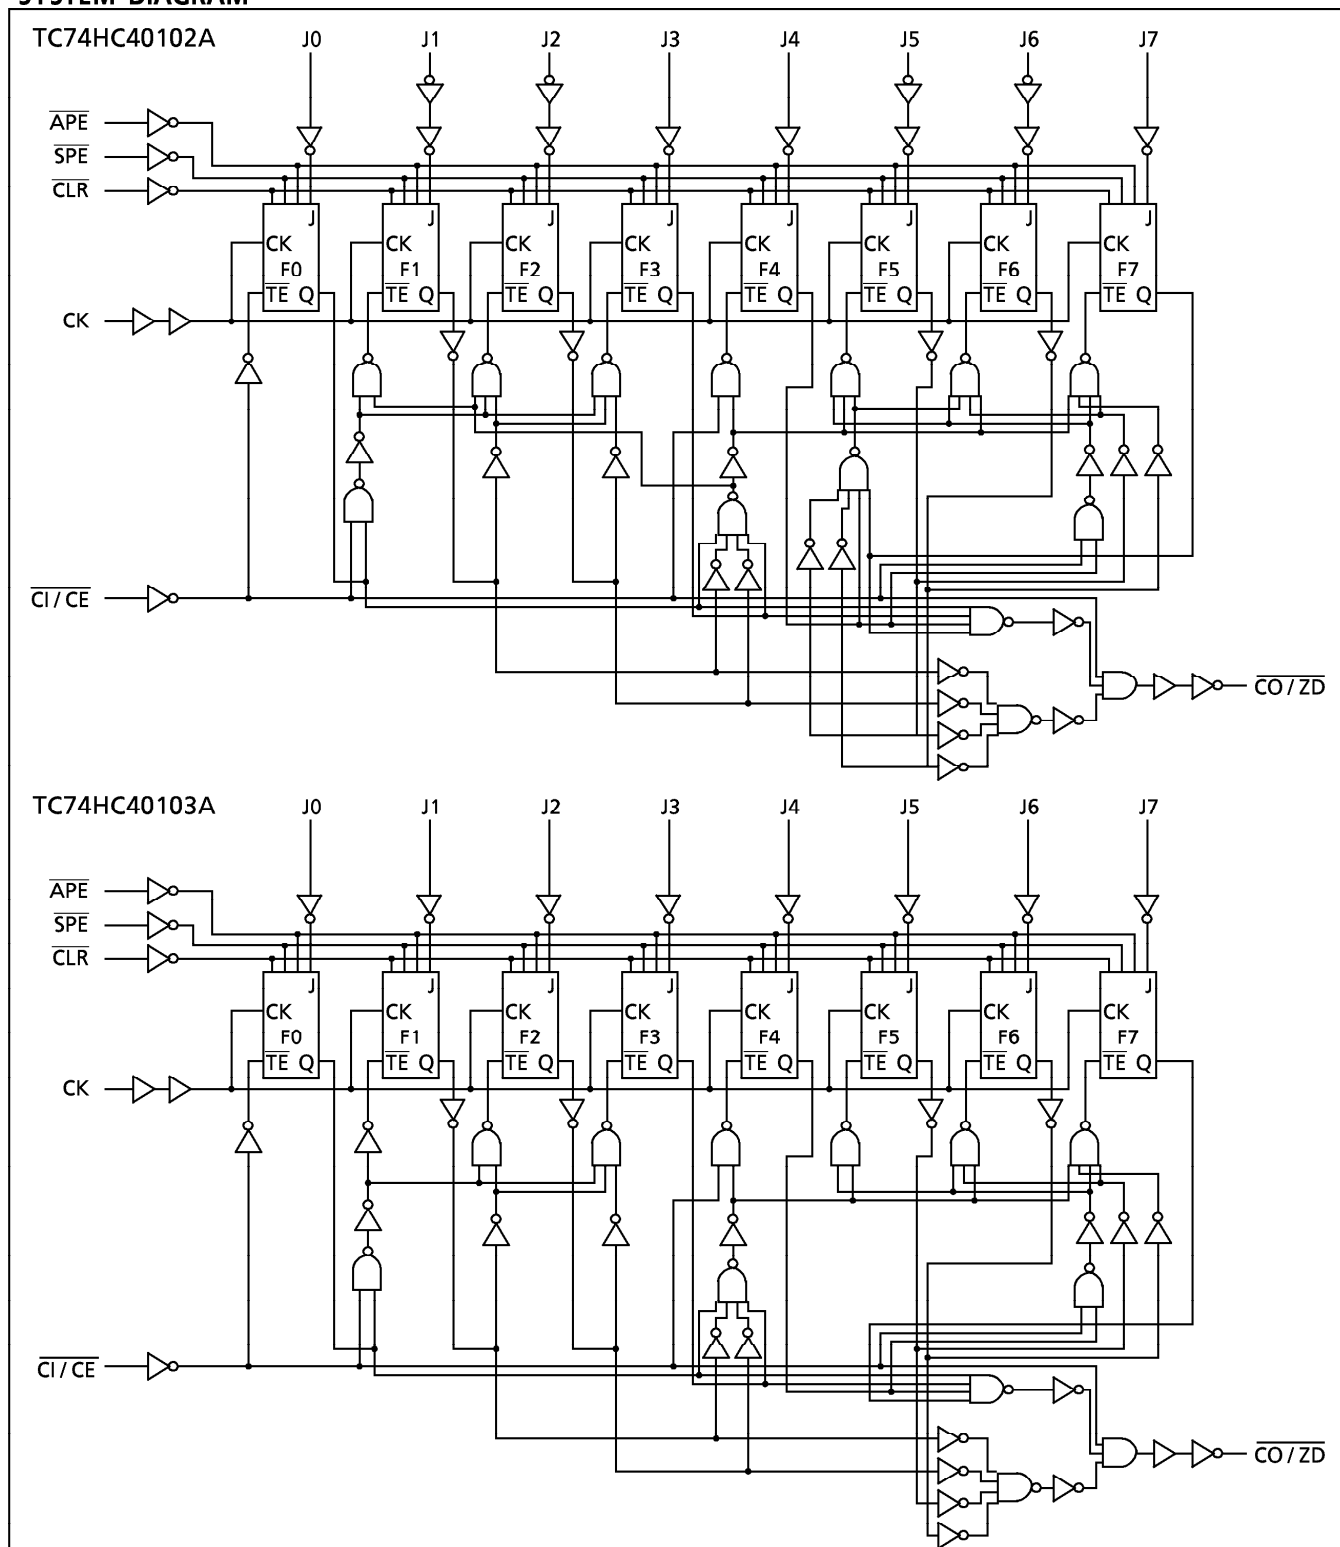

LOGIC DIAGRAM

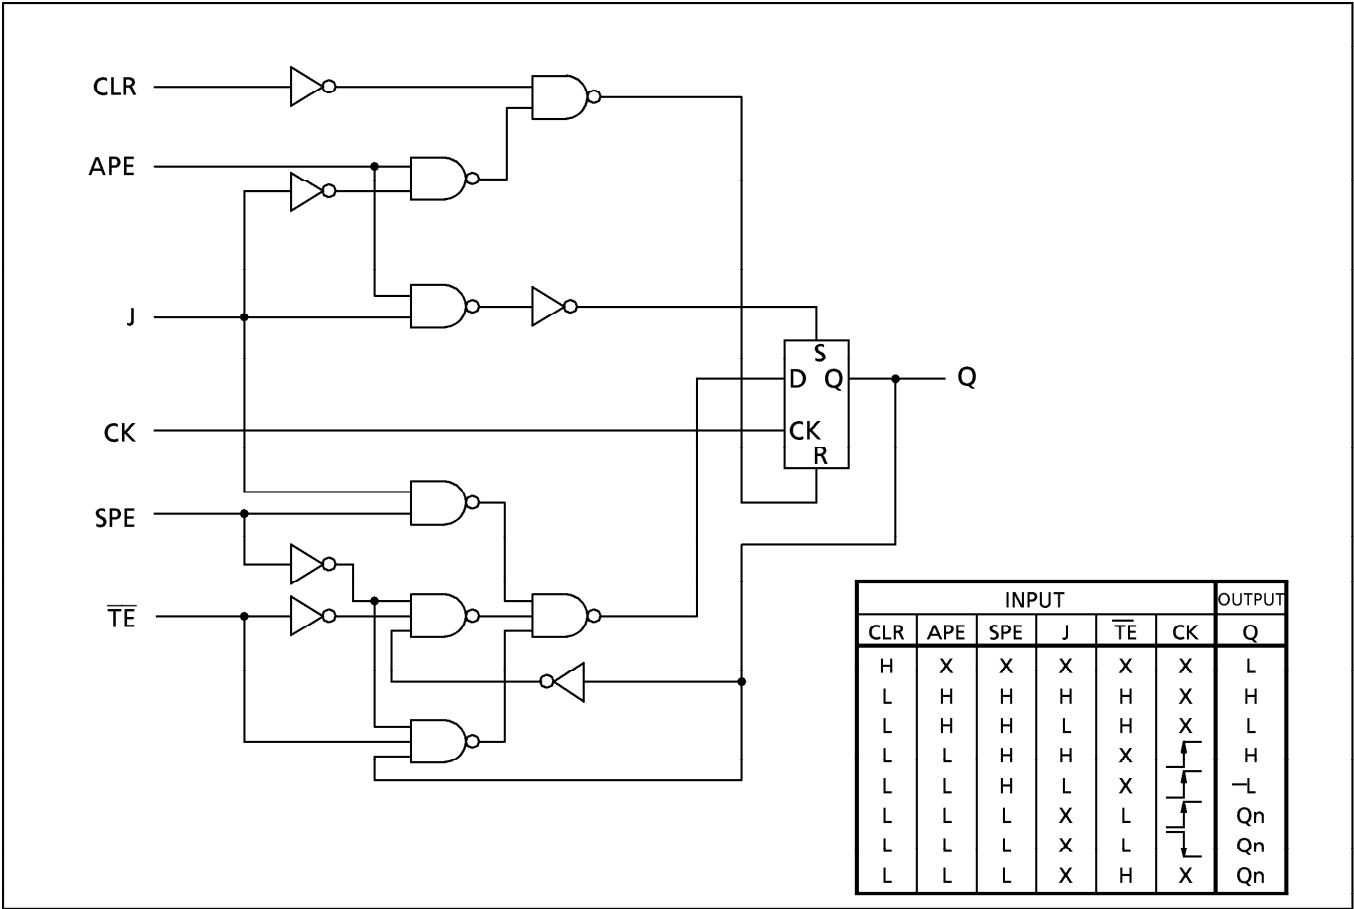

FUNCTION DESCRIPTION

The TC74HC40102A and TC74HC40103A are 8-stage presettable synchronous down counters. Carry Out/Zero Detect ( $\overline{CO/ZD}$ ) is output at the “L” level for the period of 1 bit when the readout becomes “0”. The TC74HC40102A adopts binary coded decimal notation, making setting up to 99 counts possible. While the TC74HC40103A adopts 8-bit binary counter and can set up to 255 counts.

COUNT OPERATION

At the “H” level of control input of  $\overline{CLR}$ ,  $\overline{SPE}$  and  $\overline{APE}$ , the counter carries out down count operation one by one at the rise of pulse given to CK input. Count operation can be inhibited by setting Carry Input/clock Enable ( $\overline{CI/CE}$ ) to the “H” level.

## FUNCTION DESCRIPTION (Continued)

$\overline{\text{CO}}/\overline{\text{ZD}}$  is output at the "L" level when the readout becomes "0", but is not output even if the readout becomes "0" when  $\overline{\text{CI}}/\overline{\text{CE}}$  is at the "H" level, thus maintaining the "H" level.

Synchronous cascade operation can be carried out by using  $\overline{\text{CI}}/\overline{\text{CE}}$  input and  $\overline{\text{CO}}/\overline{\text{ZD}}$  output.

The contents of count jump to maximum count (99 for the TC74HC40102A and 255 for the TC74HC40103A) if clock is given when the readout is "0". Therefore, operation of 100-frequency division and that of 256-frequency division are carried out for the TC74HC40102A and TC74HC40103A, respectively, when clock input alone is given without various kinds of preset operation.

## PRESET OPERATION AND RESET OPERATION

When Clear ( $\overline{\text{CLR}}$ ) input is set to the "L" level, the readout is set to the maximum count independently of other inputs. When Asynchronous Preset Enable ( $\overline{\text{APE}}$ ) input is set to the "L" level, readouts given on J0 to J7 can be preset asynchronously to counter independently of inputs other than  $\overline{\text{CLR}}$  input. When Synchronous Preset Enable ( $\overline{\text{SPE}}$ ) is set to the "L" level, the readouts given on J0 to J7 can be preset to counter synchronously with rise of clock.

As to these operation modes, refer to the truth table.

## ABSOLUTE MAXIMUM RATINGS

| PARAMETER                   | SYMBOL    | VALUE                    | UNIT               |
|-----------------------------|-----------|--------------------------|--------------------|
| Supply Voltage Range        | $V_{CC}$  | $-0.5 \sim 7$            | V                  |
| DC Input Voltage            | $V_{IN}$  | $-0.5 \sim V_{CC} + 0.5$ | V                  |
| DC Output Voltage           | $V_{OUT}$ | $-0.5 \sim V_{CC} + 0.5$ | V                  |
| Input Diode Current         | $I_{IK}$  | $\pm 20$                 | mA                 |
| Output Diode Current        | $I_{OK}$  | $\pm 20$                 | mA                 |
| DC Output Current           | $I_{OUT}$ | $\pm 25$                 | mA                 |
| DC $V_{CC}$ /Ground Current | $I_{CC}$  | $\pm 50$                 | mA                 |
| Power Dissipation           | $P_D$     | 500 (DIP)* / 180 (SOP)   | mW                 |
| Storage Temperature         | $T_{stg}$ | $-65 \sim 150$           | $^{\circ}\text{C}$ |

\*500mW in the range of  $T_a = -40^{\circ}\text{C} \sim 65^{\circ}\text{C}$ . From  $T_a = 65^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  a derating factor of  $-10\text{mW}/^{\circ}\text{C}$  shall be applied until 300mW.

## RECOMMENDED OPERATING CONDITIONS

| PARAMETER                | SYMBOL     | VALUE                                                                                                                          | UNIT               |
|--------------------------|------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------|
| Supply Voltage           | $V_{CC}$   | $2 \sim 6$                                                                                                                     | V                  |
| Input Voltage            | $V_{IN}$   | $0 \sim V_{CC}$                                                                                                                | V                  |
| Output Voltage           | $V_{OUT}$  | $0 \sim V_{CC}$                                                                                                                | V                  |
| Operating Temperature    | $T_{opr}$  | $-40 \sim 85$                                                                                                                  | $^{\circ}\text{C}$ |
| Input Rise and Fall Time | $t_r, t_f$ | $0 \sim 1000$ ( $V_{CC} = 2.0\text{V}$ )<br>$0 \sim 500$ ( $V_{CC} = 4.5\text{V}$ )<br>$0 \sim 400$ ( $V_{CC} = 6.0\text{V}$ ) | ns                 |

## DC ELECTRICAL CHARACTERISTICS

| PARAMETER                   | SYMBOL   | TEST CONDITION                       | $V_{CC}$<br>(V)                                        | $T_a = 25^{\circ}\text{C}$ |                   |                      | $T_a = -40 \sim 85^{\circ}\text{C}$ |                      | UNIT          |
|-----------------------------|----------|--------------------------------------|--------------------------------------------------------|----------------------------|-------------------|----------------------|-------------------------------------|----------------------|---------------|
|                             |          |                                      |                                                        | MIN.                       | TYP.              | MAX.                 | MIN.                                | MAX.                 |               |
| High - Level Input Voltage  | $V_{IH}$ |                                      | 2.0<br>4.5<br>6.0                                      | 1.50<br>3.15<br>4.20       | —<br>—<br>—       | —<br>—<br>—          | 1.50<br>3.15<br>4.20                | —<br>—<br>—          | V             |
| Low - Level Input Voltage   | $V_{IL}$ |                                      | 2.0<br>4.5<br>6.0                                      | —<br>—<br>—                | —<br>—<br>—       | 0.50<br>1.35<br>1.80 | —<br>—<br>—                         | 0.50<br>1.35<br>1.80 | V             |
| High - Level Output Voltage | $V_{OH}$ | $V_{IN} = V_{IH} \text{ or } V_{IL}$ | $I_{OH} = -20\mu\text{A}$                              | 2.0<br>4.5<br>6.0          | 1.9<br>4.4<br>5.9 | 2.0<br>4.5<br>6.0    | —<br>—<br>—                         | 1.9<br>4.4<br>5.9    | V             |
|                             |          |                                      | $I_{OH} = -4 \text{ mA}$<br>$I_{OH} = -5.2 \text{ mA}$ | 4.5<br>6.0                 | 4.18<br>5.68      | 4.31<br>5.80         | —<br>—                              | 4.13<br>5.63         |               |
| Low - Level Output Voltage  | $V_{OL}$ | $V_{IN} = V_{IH} \text{ or } V_{IL}$ | $I_{OL} = 20\mu\text{A}$                               | 2.0<br>4.5<br>6.0          | —<br>—<br>—       | 0.0<br>0.0<br>0.0    | 0.1<br>0.1<br>0.1                   | —<br>—<br>—          | V             |
|                             |          |                                      | $I_{OL} = 4 \text{ mA}$<br>$I_{OL} = 5.2 \text{ mA}$   | 4.5<br>6.0                 | —<br>—            | 0.17<br>0.18         | 0.26<br>0.26                        | —<br>—               |               |
| Input Leakage Current       | $I_{IN}$ | $V_{IN} = V_{CC} \text{ or GND}$     | 6.0                                                    | —                          | —                 | $\pm 0.1$            | —                                   | $\pm 1.0$            | $\mu\text{A}$ |
| Quiescent Supply Current    | $I_{CC}$ | $V_{IN} = V_{CC} \text{ or GND}$     | 6.0                                                    | —                          | —                 | 4.0                  | —                                   | 40.0                 |               |

AC ELECTRICAL CHARACTERISTICS (  $C_L = 15\text{pF}$ ,  $V_{CC} = 5\text{V}$ ,  $T_a = 25^\circ\text{C}$ , Input  $t_r = t_f = 6\text{ns}$  )

| PARAMETER                                                                                                             | SYMBOL                 | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-----------------------------------------------------------------------------------------------------------------------|------------------------|----------------|------|------|------|------|
| Output Transition Time                                                                                                | $t_{TLH}$<br>$t_{THL}$ |                | —    | 4    | 8    | ns   |
| Propagation Delay Time<br>( $\overline{\text{CK}} - \overline{\text{CO}}/\overline{\text{ZO}}$ )                      | $t_{PLH}$<br>$t_{PHL}$ |                | —    | 25   | 43   |      |
| Propagation Delay Time<br>( $\text{APE} - \overline{\text{CO}}/\overline{\text{ZO}}$ )                                | $t_{PLH}$<br>$t_{PHL}$ |                | —    | 25   | 49   |      |
| Propagation Delay Time<br>( $\overline{\text{CI}}/\overline{\text{CE}} - \overline{\text{CO}}/\overline{\text{ZO}}$ ) | $t_{PLH}$<br>$t_{PHL}$ |                | —    | 10   | 19   |      |
| Propagation Delay Time<br>( $\text{CLR} - \overline{\text{CO}}/\overline{\text{ZO}}$ )                                | $t_{PLH}$              |                | —    | 24   | 36   |      |
| Maximum Clock Frequency                                                                                               | $f_{\text{MAX}}$       |                | 23   | 40   | —    | MHz  |

AC ELECTRICAL CHARACTERISTICS (  $C_L = 50\text{pF}$ , Input  $t_r = t_f = 6\text{ns}$  )

| PARAMETER                                                                                                           | SYMBOL                               | TEST CONDITION | Ta = 25°C           |      |      | Ta = −40–85°C |      | UNIT |      |
|---------------------------------------------------------------------------------------------------------------------|--------------------------------------|----------------|---------------------|------|------|---------------|------|------|------|
|                                                                                                                     |                                      |                | V <sub>CC</sub> (V) | MIN. | TYP. | MAX.          | MIN. |      | MAX. |
| Output Transition Time                                                                                              | t <sub>TLH</sub><br>t <sub>THL</sub> |                | 2.0                 | —    | 30   | 75            | —    | 95   | ns   |
|                                                                                                                     |                                      |                | 4.5                 | —    | 8    | 15            | —    | 19   |      |
|                                                                                                                     |                                      |                | 6.0                 | —    | 7    | 13            | —    | 16   |      |
| Propagation Delay Time<br>(CK— $\overline{\text{CO}}/\overline{\text{ZO}}$ )                                        | t <sub>pLH</sub><br>t <sub>pHL</sub> |                | 2.0                 | —    | 95   | 245           | —    | 305  |      |
|                                                                                                                     |                                      |                | 4.5                 | —    | 28   | 49            | —    | 61   |      |
|                                                                                                                     |                                      |                | 6.0                 | —    | 22   | 42            | —    | 52   |      |
| Propagation Delay Time<br>( $\overline{\text{APE}}-\overline{\text{CO}}/\overline{\text{ZO}}$ )                     | t <sub>pLH</sub><br>t <sub>pHL</sub> |                | 2.0                 | —    | 100  | 300           | —    | 375  |      |
|                                                                                                                     |                                      |                | 4.5                 | —    | 30   | 60            | —    | 75   |      |
|                                                                                                                     |                                      |                | 6.0                 | —    | 25   | 51            | —    | 64   |      |
| Propagation Delay Time<br>( $\overline{\text{CI}}/\overline{\text{CE}}-\overline{\text{CO}}/\overline{\text{ZO}}$ ) | t <sub>pLH</sub><br>t <sub>pHL</sub> |                | 2.0                 | —    | 38   | 115           | —    | 145  |      |
|                                                                                                                     |                                      |                | 4.5                 | —    | 13   | 23            | —    | 29   |      |
|                                                                                                                     |                                      |                | 6.0                 | —    | 11   | 20            | —    | 25   |      |
| Propagation Delay Time<br>( $\overline{\text{CLR}}-\overline{\text{CO}}/\overline{\text{ZO}}$ )                     | t <sub>pLH</sub>                     |                | 2.0                 | —    | 85   | 240           | —    | 300  |      |
|                                                                                                                     |                                      |                | 4.5                 | —    | 28   | 48            | —    | 60   |      |
|                                                                                                                     |                                      |                | 6.0                 | —    | 23   | 41            | —    | 51   |      |
| Maximum Clock Frequency                                                                                             | f <sub>MAX</sub>                     |                | 2.0                 | 4    | 12   | —             | 3    | —    |      |
|                                                                                                                     |                                      |                | 4.5                 | 20   | 36   | —             | 16   | —    |      |
|                                                                                                                     |                                      |                | 6.0                 | 24   | 42   | —             | 19   | —    |      |
| Input Capacitance                                                                                                   | C <sub>IN</sub>                      |                |                     | —    | 5    | 10            | —    | 10   | pF   |
| Power Dissipation Capacitance                                                                                       | C <sub>PD</sub> (1)                  |                |                     | —    | 48   | —             | —    | —    |      |

Note (1)  $C_{\text{PD}}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation :


$$I_{\text{CC}}(\text{opr}) = C_{\text{PD}} \cdot V_{\text{CC}} \cdot f_{\text{IN}} + I_{\text{CC}}$$

TIMING REQUIREMENTS (Input  $t_r = t_f = 6\text{ns}$ )

| PARAMETER                                                                     | SYMBOL                   | TEST CONDITION | $V_{CC}$ (V) | Ta = 25°C |       | Ta = -40~85°C | UNIT |
|-------------------------------------------------------------------------------|--------------------------|----------------|--------------|-----------|-------|---------------|------|
|                                                                               |                          |                |              | TYP.      | LIMIT | LIMIT         |      |
| Minimum Pulse Width<br>(CK)                                                   | $t_{W(H)}$<br>$t_{W(L)}$ |                | 2.0          | —         | 75    | 95            | ns   |
|                                                                               |                          |                | 4.5          | —         | 15    | 19            |      |
|                                                                               |                          |                | 6.0          | —         | 13    | 16            |      |
| Minimum Pulse Width<br>( $\overline{\text{CLR}}$ , $\overline{\text{APE}}$ )  | $t_{W(L)}$               |                | 2.0          | —         | 75    | 95            |      |
|                                                                               |                          |                | 4.5          | —         | 15    | 19            |      |
|                                                                               |                          |                | 6.0          | —         | 13    | 16            |      |
| Minimum Set-up Time<br>( $\overline{\text{SPE}}$ —CK)                         | $t_s$                    |                | 2.0          | —         | 75    | 95            |      |
|                                                                               |                          |                | 4.5          | —         | 15    | 19            |      |
|                                                                               |                          |                | 6.0          | —         | 13    | 16            |      |
| Minimum Set-up Time<br>( $\overline{\text{CI}}/\overline{\text{CE}}$ —CK)     | $t_s$                    |                | 2.0          | —         | 150   | 190           |      |
|                                                                               |                          |                | 4.5          | —         | 30    | 38            |      |
|                                                                               |                          |                | 6.0          | —         | 26    | 32            |      |
| Minimum Set-up Time<br>( $\text{Jn}$ —CK)                                     | $t_s$                    |                | 2.0          | —         | 75    | 95            |      |
|                                                                               |                          |                | 4.5          | —         | 15    | 19            |      |
|                                                                               |                          |                | 6.0          | —         | 13    | 16            |      |
| Minimum Set-up Time<br>( $\text{Jn}$ — $\overline{\text{APE}}$ )              | $t_s$                    |                | 2.0          | —         | 75    | 95            |      |
|                                                                               |                          |                | 4.5          | —         | 15    | 19            |      |
|                                                                               |                          |                | 6.0          | —         | 13    | 16            |      |
| Minimum Hold Time<br>( $\overline{\text{SPE}}$ —CK)                           | $t_h$                    |                | 2.0          | —         | 0     | 0             |      |
|                                                                               |                          |                | 4.5          | —         | 0     | 0             |      |
|                                                                               |                          |                | 6.0          | —         | 0     | 0             |      |
| Minimum Hold Time<br>( $\overline{\text{CI}}/\overline{\text{CE}}$ —CK)       | $t_h$                    |                | 2.0          | —         | 0     | 0             |      |
|                                                                               |                          |                | 4.5          | —         | 0     | 0             |      |
|                                                                               |                          |                | 6.0          | —         | 0     | 0             |      |
| Minimum Hold Time<br>( $\text{Jn}$ —CK)                                       | $t_h$                    |                | 2.0          | —         | 0     | 0             |      |
|                                                                               |                          |                | 4.5          | —         | 0     | 0             |      |
|                                                                               |                          |                | 6.0          | —         | 0     | 0             |      |
| Minimum Hold Time<br>( $\text{Jn}$ — $\overline{\text{APE}}$ )                | $t_h$                    |                | 2.0          | —         | 0     | 0             |      |
|                                                                               |                          |                | 4.5          | —         | 0     | 0             |      |
|                                                                               |                          |                | 6.0          | —         | 0     | 0             |      |
| Minimum Removal Time<br>( $\overline{\text{CLR}}$ , $\overline{\text{APE}}$ ) | $t_{\text{rem}}$         |                | 2.0          | —         | 75    | 95            |      |
|                                                                               |                          |                | 4.5          | —         | 15    | 19            |      |
|                                                                               |                          |                | 6.0          | —         | 13    | 16            |      |
| Clock Frequency                                                               | f                        |                | 2.0          | —         | 4     | 3             | MHz  |
|                                                                               |                          |                | 4.5          | —         | 20    | 16            |      |
|                                                                               |                          |                | 6.0          | —         | 24    | 19            |      |




SWITCHING CHARACTERISTICS TEST WAVEFORM

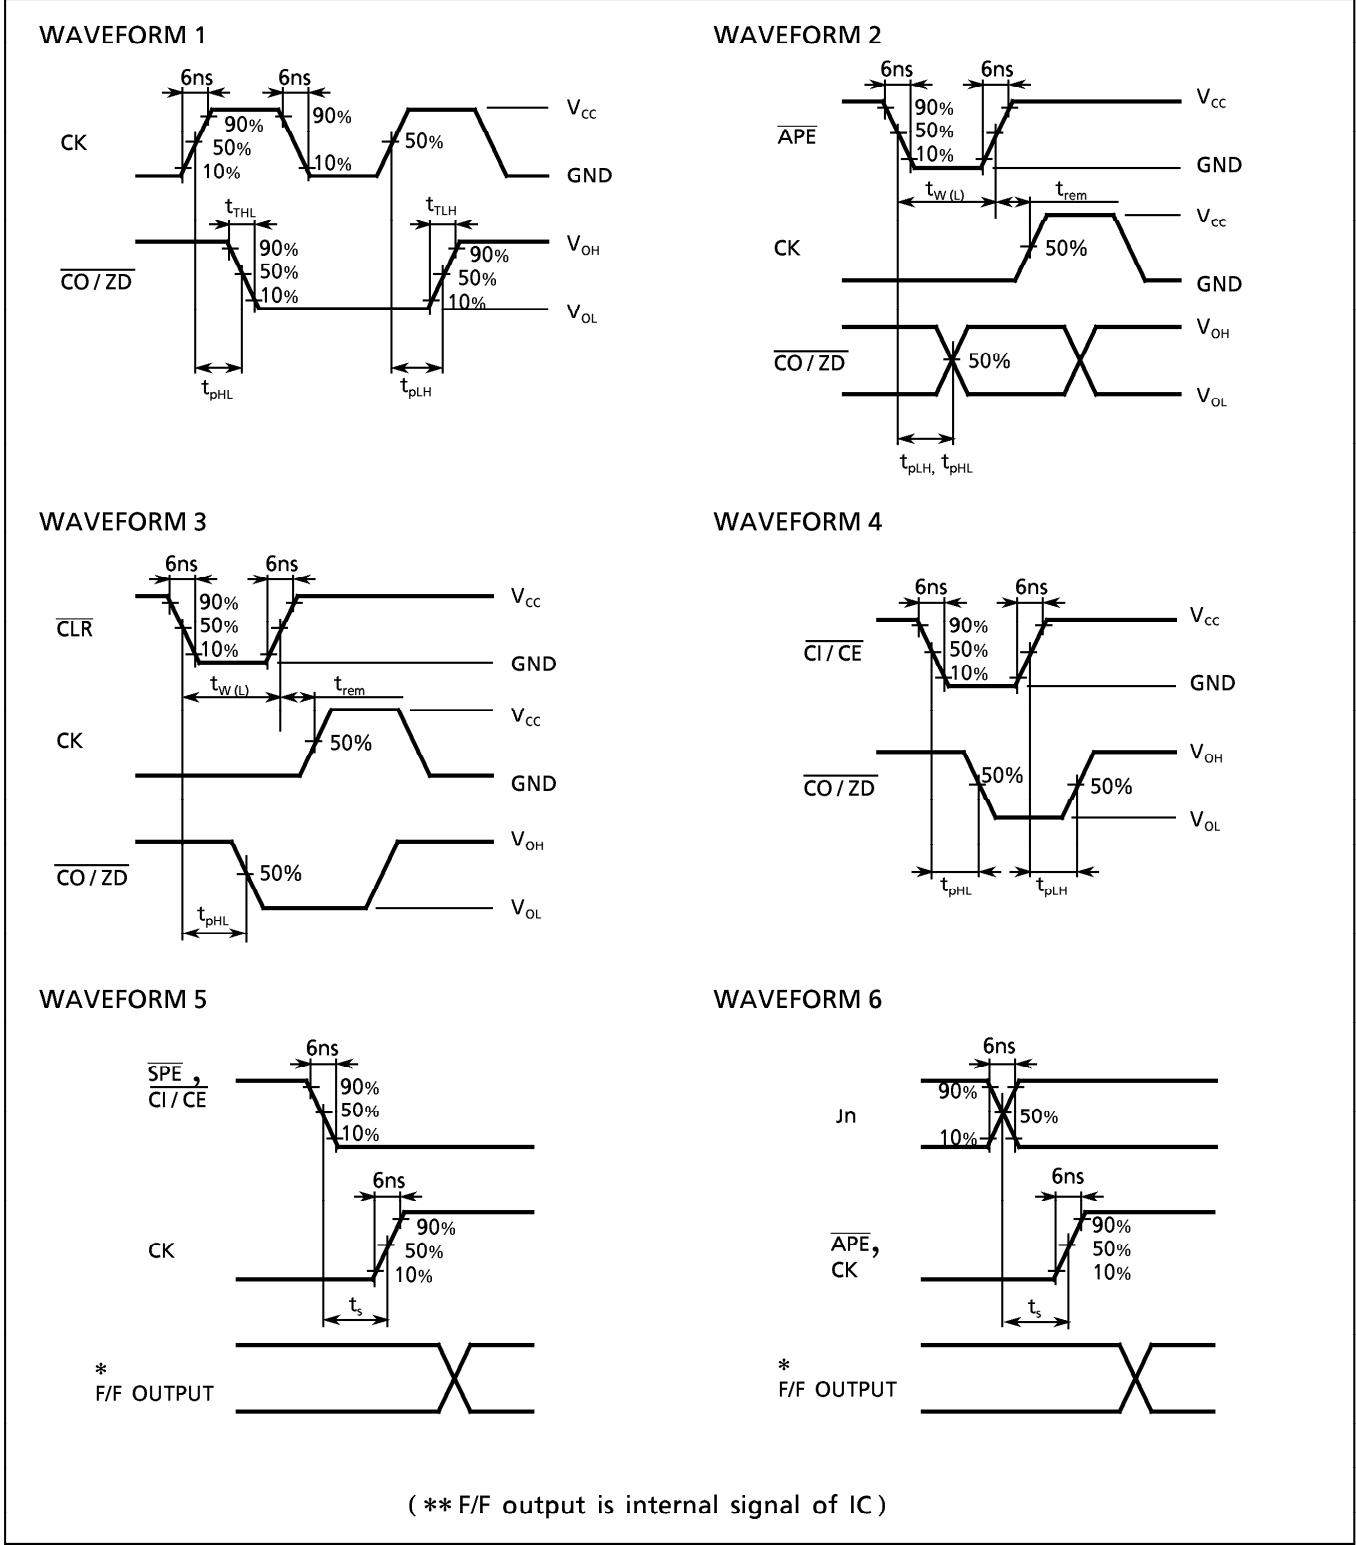


# EXAMPLE OF TYPICAL APPLICATION

## ○ PROGRAMMABLE DIVIDE - BY - N COUNTER

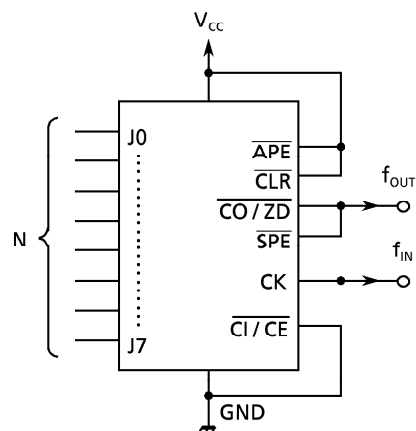


- $f_{OUT} = \frac{f_{IN}}{N+1}$
- Timing chart when N = "3"  
(J0, J1 = V<sub>CC</sub>, J2~J7 = GND)

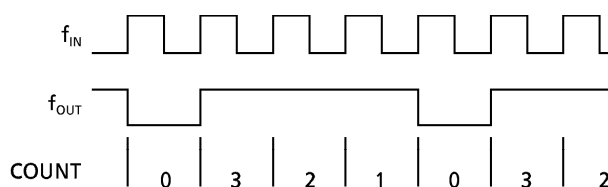



- TC74HC40102A ..... 1/2 to 1/100 are dividable.
- TC74HC40103A ..... 1/2 to 1/256 are dividable.

## ○ PARALLEL CARRY CASCADING

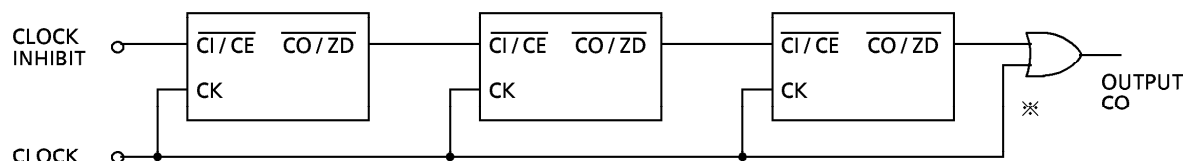

※ At synchronous cascade connection, huzzerd occurs at C0 output after its second stage when digit place changes, due to delay arrival. Therefore, take gate form TC74HC32A or the like, not form C0 output at the rear stage directly.

## ○ PROGRAMMABLE TIMER

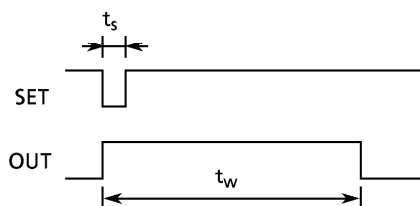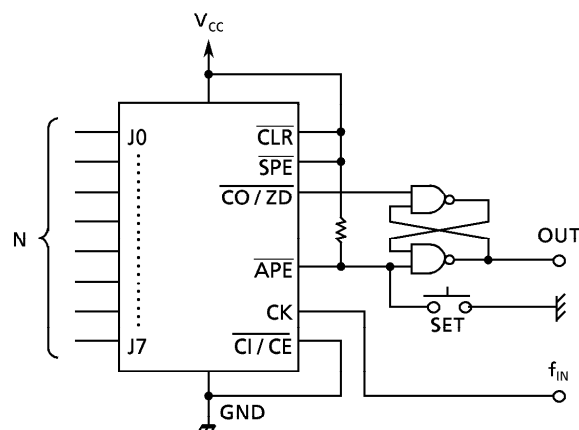


$$t_w = \left( \frac{N}{f_{IN}} + t_s \right)$$

Note: The above formula dose not take into account the phase of ck input.  
Therefore, the real pulse width is the distance between the above formula - 1/f<sub>IN</sub>~the above formula.

DIP 16PIN OUTLINE DRAWING (DIP16-P-300-2.54A)


Unit in mm

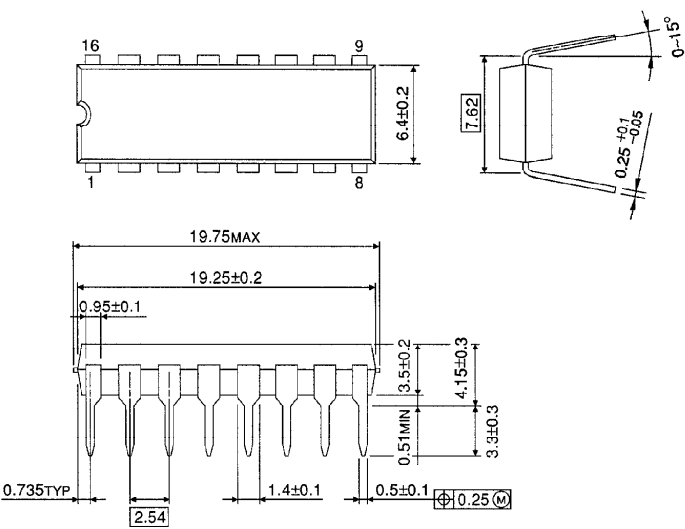

Weight : 1.00g (Typ.)

SOP 16PIN (200mil BODY) OUTLINE DRAWING (SOP16-P-300-1.27)

Unit in mm

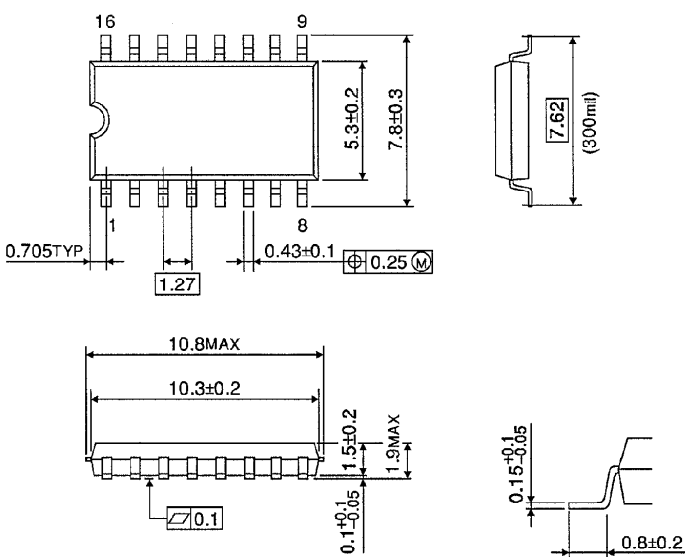

Weight : 0.18g (Typ.)