

TLN Series Telecommunications Power Fuse

170 VDC ■ Current Limiting ■ 1 – 600 Amperes



NEW



The TLN Series fuses are specifically designed for the protection of telecommunications DC power distribution circuits.

SPECIFICATIONS

Voltage Rating: 170 VDC

Interrupting Rating: 100,000 amperes

Ampere Range: 1 – 600 amperes

Approvals: UL Recognized under the components program
(File No: E71611)

AMPERE RATINGS

1	15	40	80	150	300	600
3	20	45	90	175	350	
5	25	50	100	200	400	
6	30	60	110	225	450	
10	35	70	125	250	500	

Example part number (series & amperage): TLN450

RECOMMENDED FUSE BLOCKS

LR250 Series

Refer to Fuse Block section of this catalog for additional information.

FEATURES

- 170 VDC
- Fast acting and current limiting
- 1 to 600 amperes
- Dimensionally similar to 250V Class R fuses

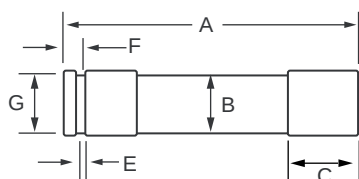


FIG. 1

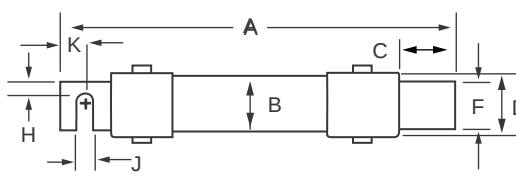


FIG. 2

AMPERE RATING	DIMENSIONS IN INCHES (mm in parentheses)									
	A	B	C	D	E	F	G	H	J	K
Figure 1										
1 – 30	2 (50.8)	1/2 (12.7)	1/2 (12.7)	9/16 (14.3)	5/64 (2.0)	5/32 (4.0)	3/8 (9.5)	—	—	—
35 – 60	3 (76.2)	3/4 (19.1)	5/8 (15.9)	13/16 (20.6)	3/32 (2.4)	3/16 (4.8)	5/8 (15.9)	—	—	—
Figure 2										
70 – 100	5-7/8 (149.2)	1 (25.4)	1-1/16 (27.0)	1-1/16 (27.0)	1/8 (3.2)	3/4 (19.1)	1-1/4 (31.6)	1/4 (6.4)	9/32 (7.1)	1/2 (12.7)
110 – 200	7-1/8 (181.0)	1-1/2 (38.1)	1-15/32 (37.3)	1-19/32 (40.5)	3/16 (4.8)	1-1/8 (28.6)	1-27/32 (46.8)	7/16 (11.1)	9/32 (7.1)	11/16 (17.5)
225 – 400	8-5/8 (219.1)	2 (50.8)	1-15/16 (49.2)	2-3/32 (53.2)	1/4 (6.4)	1-5/8 (41.3)	2-11/32 (59.5)	5/8 (15.9)	13/32 (10.3)	15/16 (23.8)
450 – 600	10-3/8 (263.5)	2-1/2 (63.5)	2-3/8 (60.3)	2-19/32 (65.9)	1/4 (6.4)	2 (50.8)	2-27/32 (72.2)	3/4 (19.1)	17/32 (13.5)	1-1/8 (28.6)

Contact Littelfuse for characteristic curves.