


## GaAs/GaAlAs IR Emitting Diode in $\varnothing$ 5 mm (T-1 $\frac{3}{4}$ ) Package

### Description

TSAL7300 is a high efficiency infrared emitting diode in GaAlAs on GaAs technology, molded in clear, plastic packages.

In comparison with the standard GaAs on GaAs technology these emitters achieve more than 100 % radiant power improvement at a similar wavelength. The forward voltages at low current and at high pulse current roughly correspond to the low values of the standard technology. Therefore these emitters are ideally suitable as high performance replacements of standard emitters.

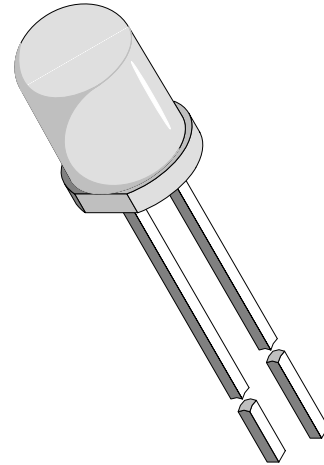

94 8389

### Features

- Extra high radiant power and radiant intensity
- Low forward voltage
- Suitable for high pulse current operation
- Standard T-1 $\frac{3}{4}$  ( $\varnothing$  5 mm) package
- Angle of half intensity  $\varphi = \pm 22^\circ$
- Peak wavelength  $\lambda_p = 940$  nm
- High reliability
- Good spectral matching to Si photodetectors

### Applications

Infrared remote control units with high power requirements  
Free air transmission systems  
Infrared source for optical counters and card readers  
IR source for smoke detectors

### Absolute Maximum Ratings

$T_{amb} = 25^{\circ}\text{C}$

| Parameter                           | Test Conditions                          | Symbol     | Value      | Unit               |
|-------------------------------------|------------------------------------------|------------|------------|--------------------|
| Reverse Voltage                     |                                          | $V_R$      | 5          | V                  |
| Forward Current                     |                                          | $I_F$      | 100        | mA                 |
| Peak Forward Current                | $t_p/T = 0.5$ , $t_p = 100\ \mu\text{s}$ | $I_{FM}$   | 200        | mA                 |
| Surge Forward Current               | $t_p = 100\ \mu\text{s}$                 | $I_{FSM}$  | 1,5        | A                  |
| Power Dissipation                   |                                          | $P_V$      | 210        | mW                 |
| Junction Temperature                |                                          | $T_j$      | 100        | $^{\circ}\text{C}$ |
| Operating Temperature Range         |                                          | $T_{amb}$  | -55...+100 | $^{\circ}\text{C}$ |
| Storage Temperature Range           |                                          | $T_{stg}$  | -55...+100 | $^{\circ}\text{C}$ |
| Soldering Temperature               | $t \leq 5\text{sec}$ , 2 mm from case    | $T_{sd}$   | 260        | $^{\circ}\text{C}$ |
| Thermal Resistance Junction/Ambient |                                          | $R_{thJA}$ | 350        | K/W                |

### Basic Characteristics

$T_{amb} = 25^{\circ}\text{C}$

| Parameter                        | Test Conditions                                | Symbol           | Min | Typ      | Max | Unit          |
|----------------------------------|------------------------------------------------|------------------|-----|----------|-----|---------------|
| Forward Voltage                  | $I_F = 100\ \text{mA}$ , $t_p = 20\ \text{ms}$ | $V_F$            |     | 1.35     | 1.6 | V             |
|                                  | $I_F = 1\ \text{A}$ , $t_p = 100\ \mu\text{s}$ | $V_F$            |     | 2.6      | 3   | V             |
| Temp. Coefficient of $V_F$       | $I_F = 100\ \text{mA}$                         | $TK_{VF}$        |     | -1.875   |     | mV/K          |
| Reverse Current                  | $V_R = 5\ \text{V}$                            | $I_R$            |     |          | 10  | $\mu\text{A}$ |
| Junction Capacitance             | $V_R = 0$ , $f = 1\ \text{MHz}$ , $E = 0$      | $C_j$            |     | 25       |     | pF            |
| Radiant Intensity                | $I_F = 100\ \text{mA}$ , $t_p = 20\ \text{ms}$ | $I_e$            | 30  | 45       |     | mW/sr         |
|                                  | $I_F = 1\ \text{A}$ , $t_p = 100\ \mu\text{s}$ | $I_e$            | 260 | 350      |     | mW/sr         |
| Radiant Power                    | $I_F = 100\ \text{mA}$ , $t_p = 20\ \text{ms}$ | $\phi_e$         |     | 35       |     | mW            |
| Temp. Coefficient of $\phi_e$    | $I_F = 20\ \text{mA}$                          | $TK_{\phi_e}$    |     | -0.6     |     | %/K           |
| Angle of Half Intensity          |                                                | $\phi$           |     | $\pm 22$ |     | deg           |
| Peak Wavelength                  | $I_F = 100\ \text{mA}$                         | $\lambda_p$      |     | 940      |     | nm            |
| Spectral Bandwidth               | $I_F = 100\ \text{mA}$                         | $\Delta\lambda$  |     | 50       |     | nm            |
| Temp. Coefficient of $\lambda_p$ | $I_F = 100\ \text{mA}$                         | $TK_{\lambda_p}$ |     | 0.2      |     | nm/K          |
| Rise Time                        | $I_F = 100\ \text{mA}$                         | $t_r$            |     | 800      |     | ns            |
|                                  | $I_F = 1\ \text{A}$                            | $t_r$            |     | 500      |     | ns            |
| Fall Time                        | $I_F = 100\ \text{mA}$                         | $t_f$            |     | 800      |     | ns            |
|                                  | $I_F = 1\ \text{A}$                            | $t_f$            |     | 500      |     | ns            |
| Virtual Source Diameter          | method: 63% encircled energy                   | $\emptyset$      |     | 2.1      |     | mm            |

**Typical Characteristics** ( $T_{amb} = 25^{\circ}\text{C}$  unless otherwise specified)

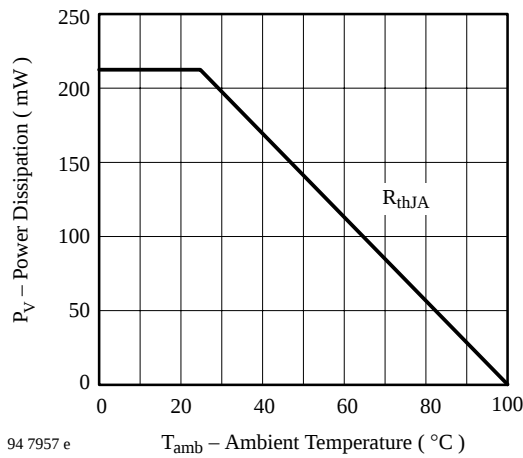


Figure 1. Power Dissipation vs. Ambient Temperature

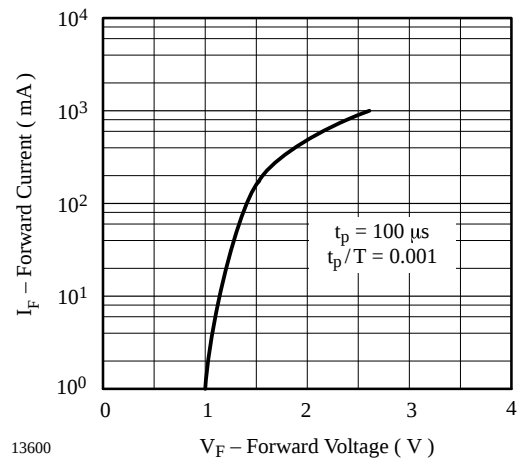


Figure 4. Forward Current vs. Forward Voltage

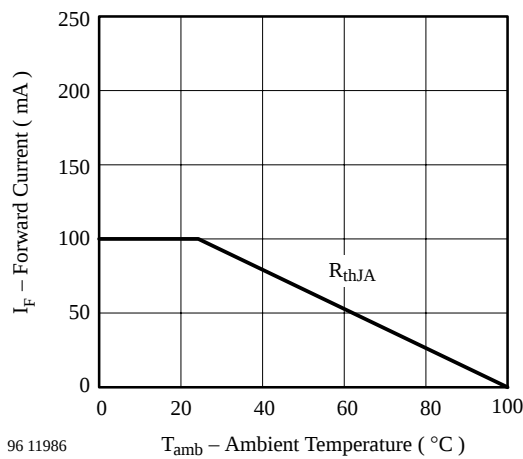


Figure 2. Forward Current vs. Ambient Temperature

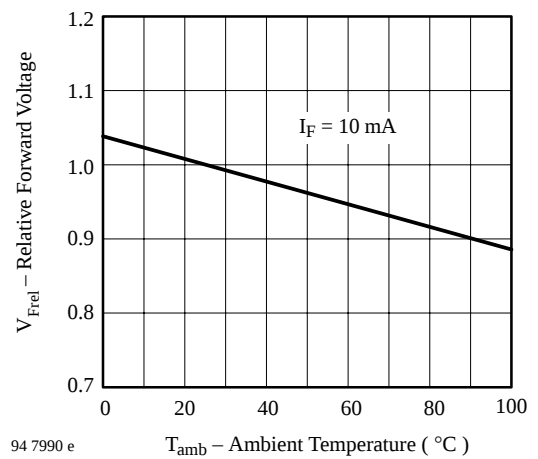


Figure 5. Relative Forward Voltage vs. Ambient Temperature

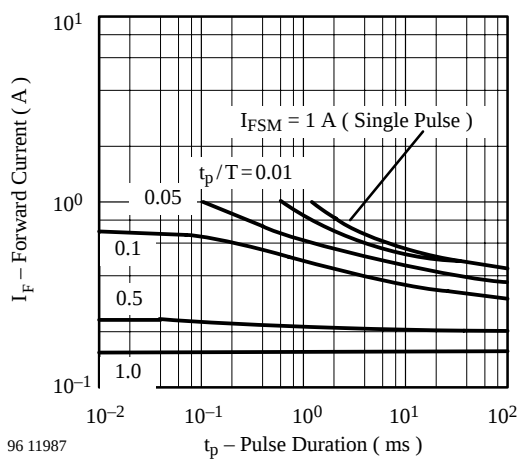


Figure 3. Pulse Forward Current vs. Pulse Duration

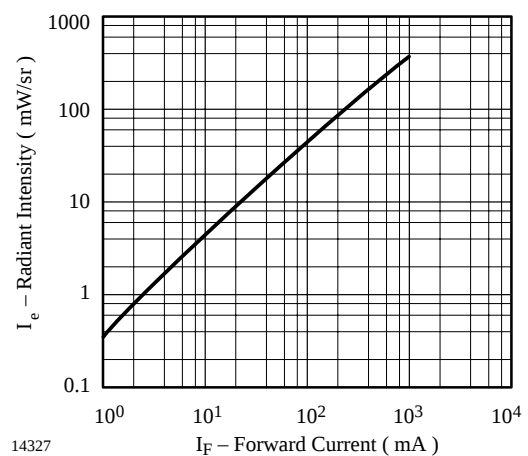


Figure 6. Radiant Intensity vs. Forward Current

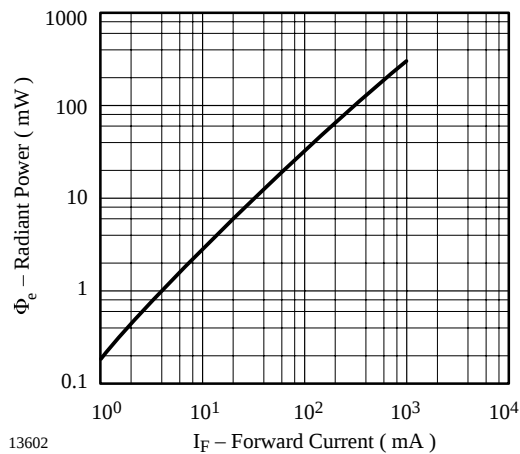


Figure 7. Radiant Power vs. Forward Current

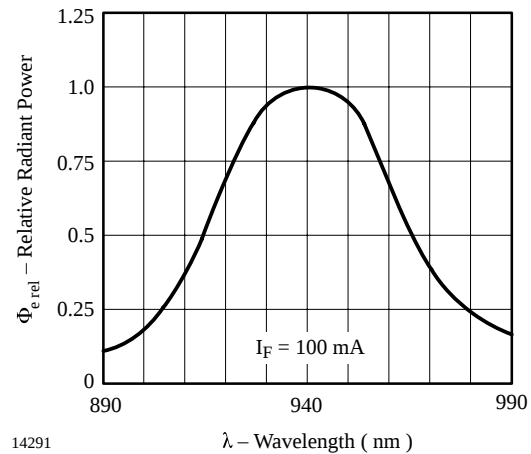


Figure 9. Relative Radiant Power vs. Wavelength

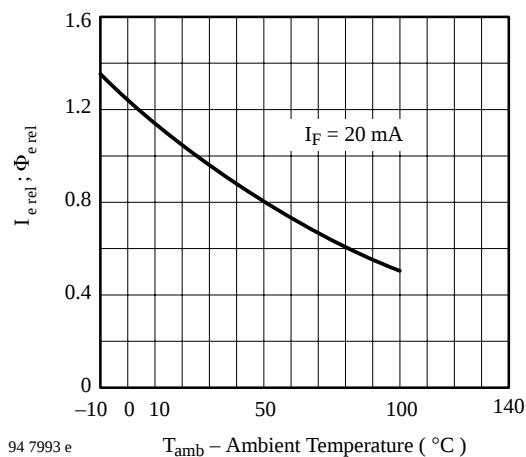


Figure 8. Rel. Radiant Intensity/Power vs. Ambient Temperature


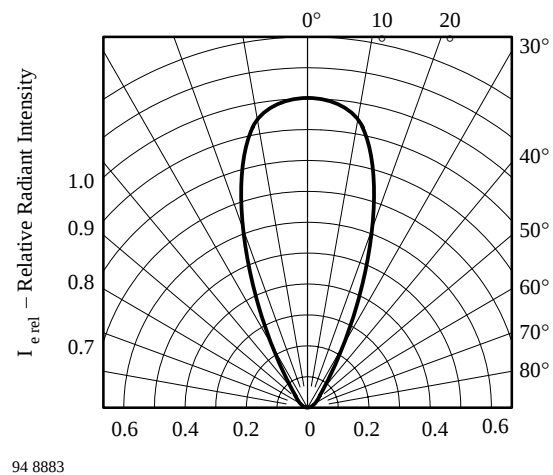


Figure 10. Relative Radiant Intensity vs. Angular Displacement

Technical drawing of a mechanical part, showing a side view and a top view. The side view dimensions are: total length  $34.4 \pm 0.55$ , distance from the left end to the start of the last thread  $8.7 \pm 0.3$ , distance from the left end to the center of the last thread  $7.7 \pm 0.15$ , distance from the left end to the center of the first thread  $(3.6)$ , distance from the left end to the center of the second thread  $0.6^{+0.2}_{-0.1}$ , distance from the left end to the center of the third thread  $1.5 \pm 0.25$ , and distance from the left end to the center of the fourth thread  $0.5^{+0.15}_{-0.05}$ . The top view shows a circular cross-section with a diameter of  $5.8 \pm 0.15$  and a central hole with a diameter of  $2.54$  nom. The top view also shows a distance of  $< 0.7$  from the center of the hole to the edge of the part.

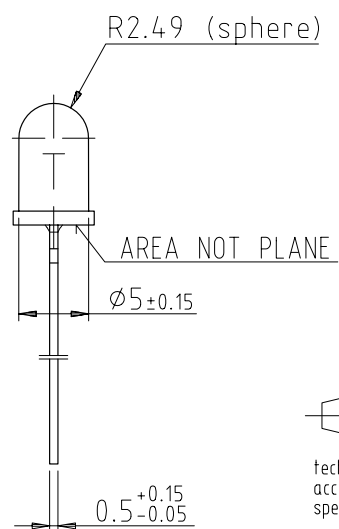

### Ozone Depleting Substances Policy Statement

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

**Vishay Semiconductor GmbH** has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

**Vishay Semiconductor GmbH** can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

**We reserve the right to make changes to improve technical design and may do so without further notice.**

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay-Telefunken products for any unintended or unauthorized application, the buyer shall indemnify Vishay-Telefunken against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany  
Telephone: 49 (0) 7131 67 2831, Fax number: 49 (0) 7131 67 2423