

**TRIPOLAR OVERVOLTAGE PROTECTION
FOR NETWORK INTERFACES
PRODUCT PREVIEW**

DESCRIPTION

Transient suppressor TCP030E is dedicated to ISDN, T1, Ethernet, and data lines protection. Important features - very low breakover voltage combined with low capacitance. May be used as a triple or a single bi-directional suppressor – see schematic diagram.

This product provides:

- low capacitance, allowing high speed signal transmissions with low losses
- low dynamic breakover voltage, protecting submicron microelectronic circuitry
- Compliance with BELLCORE 1089-GR requirements for intrabuilding lightning and power fault surges.

This low stand-off voltage and low capacitance protector is well suited for use in high-speed interfaces as ISDN.

IMPORTANT: For the most current data, consult *MICROSEMI*'s website: <http://www.microsemi.com>

COMPLIES WITH THE FOLLOWING STANDARDS:


CCITT K17 - K20	10/700 μ s	1.5 KV
	5/310 μ s	38 A
VDE 0433	10/700 μ s	2 KV
	5/310 μ s	50 A
VDE 0878	1.2/50 μ s	1.5 KV
	1/20 μ s	40 A
CNET	0.5/700 μ s	1.5 KV
	0.2/310 μ s	38 A
IEC801-2	15kV	air discharge
IEC801-5	1.2/50 μ s	4kV
	8/20 μ s	100 A

UL94V-0 TCPxx packages comply with requirements of UL94V-0


KEY FEATURES

- BIDIRECTIONAL TRIPLE CROWBAR PROTECTION
- PEAK PULSE CURRENT: $I_{PP} = 30$ A, 10/1000 μ s
- BREAKDOWN VOLTAGE: 28 V
- AVAILABLE IN SO8 PACKAGES
- LOW DYNAMIC BREAKOVER VOLTAGE: 40 V @ 2/10 μ s
- Low Capacitance: 30 pF

APPLICATIONS/BENEFITS

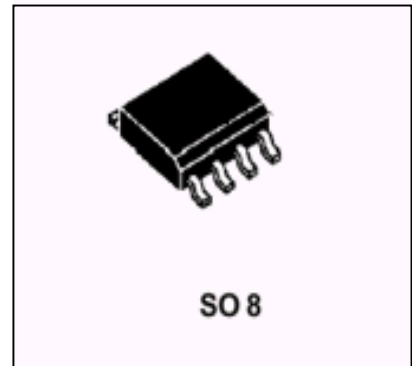

SCHEMATIC DIAGRAM

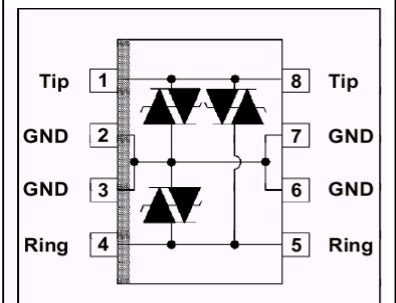


**TRIPOLAR OVERVOLTAGE PROTECTION
FOR NETWORK INTERFACES**
PRODUCT PREVIEW
ELECTRICAL PARAMETERS @ 25°C (unless otherwise specified)

Symbol	Parameter	Value	Unit
I_{PP}	Peak pulse current (see note 1)	10/1000 μ s	30
		8/20 μ s	150
		2/10 μ s	200
I_{TSM}	Non repetitive surge peak on-state current (F = 50 Hz).	$t_p = 10$ ms	8
		$t = 1$ s	3.5
T_{stg}	Storage temperature range	-55 to + 150	$^{\circ}$ C
T_j	Maximum junction temperature	150	
T_L	Maximum lead temperature for soldering during 10s	260	$^{\circ}$ C

Note 1 : Pulse waveform :

10/1000 μ s $t_r=10\mu$ s $t_p=1000\mu$ s
 8/20 μ s $t_r=8\mu$ s $t_p=20\mu$ s
 2/10 μ s $t_r=2\mu$ s $t_p=10\mu$ s

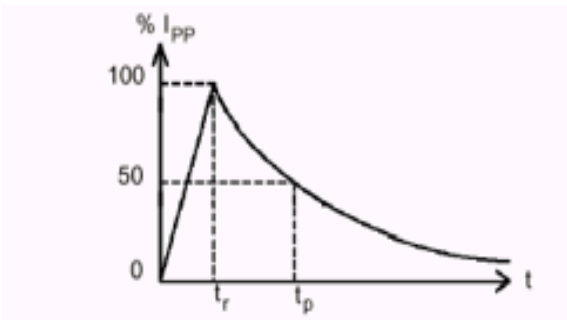
THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction to ambient	SO 8 170	$^{\circ}$ C/W



SANTA ANA DIVISION

TCP030E

**TRIPOLAR OVERVOLTAGE PROTECTION
FOR NETWORK INTERFACES**


PRODUCT PREVIEW

ELECTRICAL CHARACTERISTICS (Tamb= 25°C)									
Symbol	Parameter								
V_{RM}	Stand-off voltage								
I_{RM}	Leakage current								
V_{BR}	Breakdown voltage								
V_{BO}	Breakover voltage								
I_H	Holding current								
I_{BO}	Breakover current								
I_{PP}	Peak pulse current								
V_F	Forward Voltage Drop								
C	Capacitance								

Types	I_{RM} @ V_{RM}		I_R @ V_{BR}		V_{BO}	V_{BO}	I_{BO}	I_H	C_P
	max		min		max	dyn typ	max	min	max
	μA	V	mA	V	V	V	mA	mA	pF
TCP030E	1	28	1	28	38	40	100	30	30

**TRIPOLAR OVERVOLTAGE PROTECTION
FOR NETWORK INTERFACES**
PRODUCT PREVIEW

PACKAGE MECHANICAL DATA
SO-8 (Plastic)

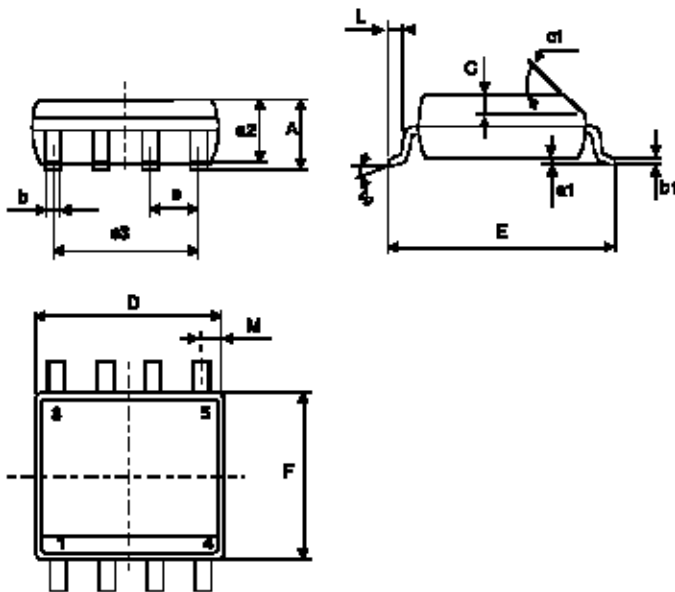

REF.	DIMENSIONS					
	Millimetres			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.75			0.069
a1	0.1		0.25	0.004		0.010
a2			1.65			0.065
b	0.35		0.48	0.014		0.019
b1	0.19		0.25	0.007		0.010
C		0.50			0.020	
c1	45° (typ)					
D	4.8		5.0	0.189		0.197
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		3.81			0.150	
F	3.8		4.0	0.15		0.157
L	0.4		1.27	0.016		0.050
M			0.6			0.024
S	8° (max)					



TCP030E

**TRIPOLAR OVERVOLTAGE PROTECTION
FOR NETWORK INTERFACES
PRODUCT PREVIEW**

www.Microsemi.com

NOTES