

LEDTRONICS, INC.®



Datasheets Order / RFQ Reps / Dists Media About Us Catalogs/Lit. Samples Site Map Survey

Home Datasheet Home Miniature Based Medium Based Panel PCB Discrete SMT Custom&RGB SafetyLED LED Specs [SEARCH

A19 Style 3D PedLED® Solid-State Light Bulb **CLICK HERE FOR THIS PAGE WITH PRICING**

click here to access 229KB pdf file of this page

Benefits

Go to Page 1: G25 Style 3D Solid-State Light Bulb Go to Page 3: G30 Style 3D Light Bulb

12/14Volt versions are available for alternate or renewable energy sources (solar, wind etc.)

consumption

stock

required

Reduced maintenance

Reduced warehouse

No retrofitting kits

Features


- Easy installation using existing socket, lens, reflector; no throwaway parts
- LED operating life: 100,000+ hours (10+
- Solid-state, high shock/vibration resistant
- Type 2 bulb direct incandescent replacement
- On/off shock resistant
- Three-year warranty


Applications Options Reduced power

- Toll booths
 - Receiving docks
 - Beacon Lighting
- standard bases Choice of colors Bi-color bulbs

Industry

Special voltages Flashing/ strobe circuit






A19 Style Bulb

A19 Style Bulb Series TRF-A19

A 19 Otyle Build Oction 11th A 19							
Part Number	Color		Voltage	Energy Used (Watts)	Total Lighting Elements	Total Light Output $I_{_{_{ m V}}}$ (cd)	Beam Spread
TRF-A19-0UR-02	Red	[.	120 VAC	4.32	72	75	Lens
TRF-A19-0UO-02	Amber	[-	120 VAC	4.32	72	40	
TRF-A19-0UY-02	Yellow		120 VAC	4.32	72	70	
TRF-A19-0CW-02	White	Ŀ	120 VAC	3.60	72	40	
TRF-A19-0BG-02	Blue-Green		120 VAC	3.60	72	70	
TRF-A19-0UB-02	Blue		120 VAC	3.60	72	70	

Applications

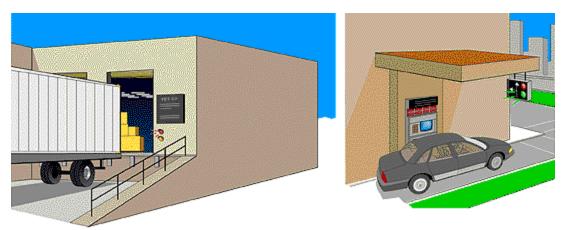

Specifications subject to change without notice.



23105 Kashiwa Ct, Torrance, CA 90505 - PH: (800) 579-4875/(310) 534 -1505 - FAX: (310) 534 -1424 © Copyright 1997-2001 LEDtronics, Inc. All Rights Reserved - Contact Webmaster@ledtronics.com