

REV. Status

PRELIMINARY  
01/21/00 MPPRELIMINARY 1  
CHANGED TO  
OPEN STYLE.  
05/03/00 JCPRELIMINARY 2  
CHANGED  
A.7 AND A.8  
08/22/00 MPADSL transformer designed for use with Motorola ADSL IC chip MC03AX1456RT  
Rev. 1.3, on the CPE side



## A. Electrical Specifications (@ 25°C)

1. Primary (Line side) Impedance; 100 $\Omega$
2. Secondary (IC side) Impedance; 324 $\Omega$
3. Longitudinal Balance; 40dBm MIN @ 20KHz TO 1.1MHz, 0dBm  
(Per ITU method pin 8 grounded)
4. Primary Open Circuit Inductance; 3.96mH $\pm$ 5% @ 10KHz, 0.1Vrms  
Measured (1-4) with 2 and 3 shorted
5. Leakage Inductance; 18 $\mu$ H MAX @ 100KHz, 0.1Vrms  
Measured (1-4) with 2 & 3, and 7 & 9 shorted
6. Interwinding Capacitance; 40pF MAX @ 10KHz, 1.0Vrms  
Measured (1-9) with 2 & 3 shorted
7. DC Resistance; (1-3)=2.40 $\Omega$  MAX  
(2-4)=2.40 $\Omega$  MAX  
(7-9)=8.30 $\Omega$  MAX
8. Turns Ratio; (1-4):(7-9)=1:1.80 $\pm$ 2%  
2 & 3 shorted
9. Dielectric Strength; 1875Vrms 1 second @ Pri to Sec


## B. Marking; TTC-4011, TAMURA, date code and country of origin

## C. Safety; Complies with UL1950 3rd Edition and IEC950

## D. Schematic;

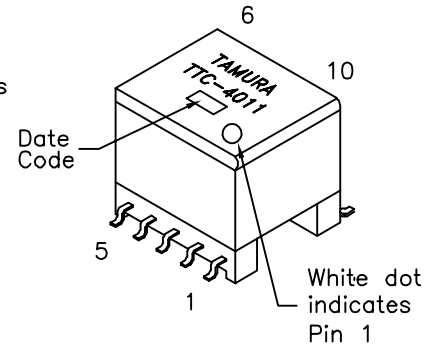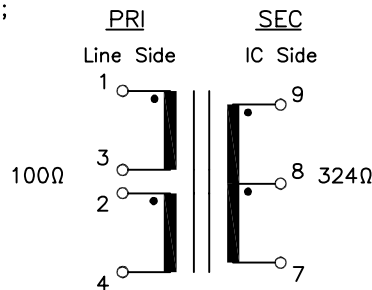

## E. Mechanical Specifications;

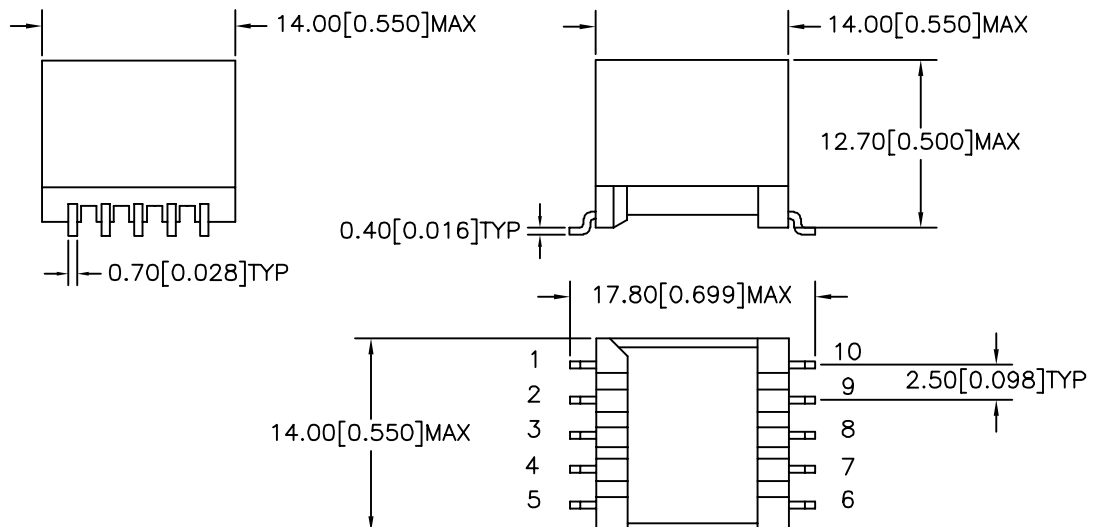

PREPARED BY:

D. Rund

ENGINEER:

M. Pitchai

QUALITY CONTROL:

D. Kelley

APPROVED:

J. Coleman

DWG CONTROL NO.

P-A1-12318

ACAD\TTC\A1123181.DWG

REV

PR2

ADSL

TRANSFORMER

TAMURA CORPORATION OF AMERICA

43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
(909) 699-1270 FAX 9096769482

TTC-4011

MODEL SPECIFICATION

DIM: mm(In) SCL: 2/1 SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

MODEL NUMBER

TTC-4011