


Part Number

TSF0462-L2

462 MHz SAW Filter Pager

SPECIFICATION

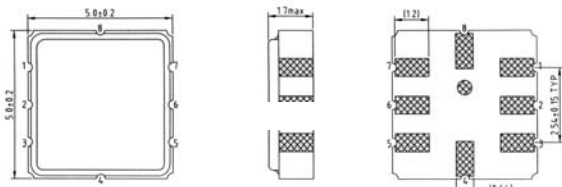

All Dimensions in mm

Input: 2

Output: 6

Unused contacts to be connected to Ground

PRODUCT FEATURES :

- **HIGH STABILITY**
- **LOW LOSS**
- **SMALL SIZE**

CONTACT :

TEMEX S.A.W.



PUITS-GODET 8,
2000 NEUCHÂTEL
SWITZERLAND

TEL. : ++41 32 722 18 20

FAX : ++41 32 722 18 29

- OR CONTACT YOUR TEKELEC TEMEX SALES REPRESENTATIVE


TYPICAL PERFORMANCE (Measurement)

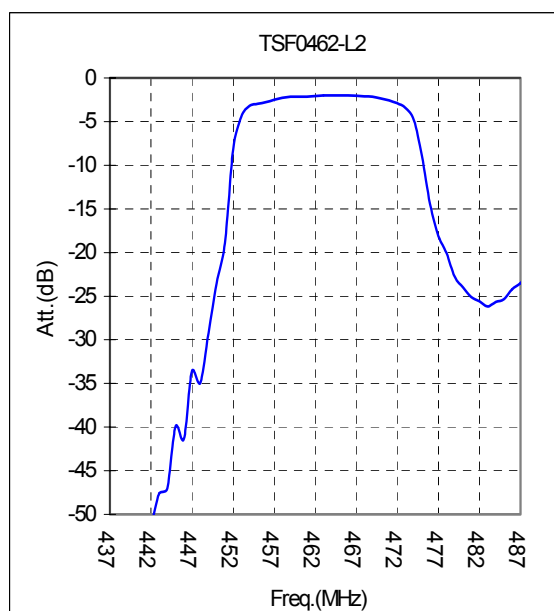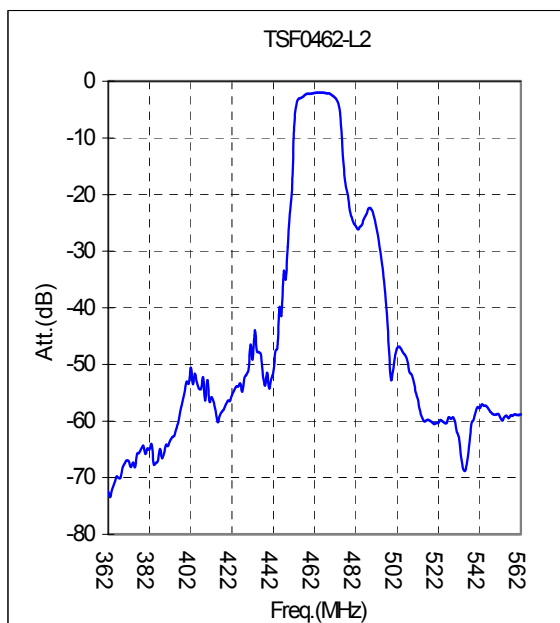

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Central Frequency	f_o	Nominal		462		MHz
Insertion Loss	IL	Within $f_o \pm 4$ MHz			4.5	dB
Amplitude variation	AV	Within $f_o \pm 4$ MHz			2.5	dB
Rejection wrt 0dB	R_{j1}	$f_o - 100$... $f_o - 40.8$ MHz	50			dB
	R_{j2}	$f_o + 40$... $f_o + 100$ MHz	42			dB
I/P & O/P impedance	Z_{in}/Z_{out}	Unmatched (see note 1)		50		Ω

Note 1:

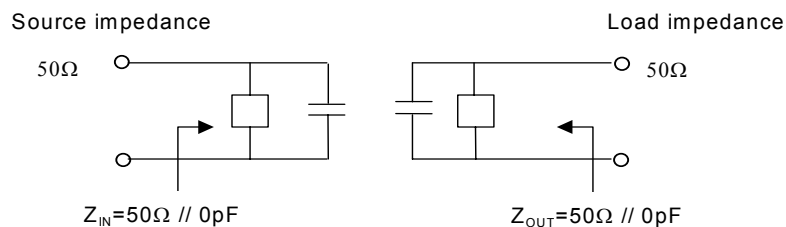


OPERATIONAL ENVIRONMENT


Parameter	Conditions	Min	Typ	Max	Unit
Power Dissipation	Maximum			0	dBm
DC Voltage	Maximum			10	V
Storage Temperature		-40		+85	$^{\circ}C$
Operating Temperature	Operational	-10		+50	$^{\circ}C$

Test Item	Condition of Test	Requirements
Shock (Drop Test)	Random free drops 3 times from height of 1.0 meter onto concrete floor.	The specimens shall meet the electrical specifications.
Vibration	Total peak amplitude : 1.5 mm Vibration frequency : 10 to 55 Hz Sweep period : 1.0 minute Vibration directions : 3 mutually perpendicular Duration : 2 hours / direction	
Solderability (Solder Heat)	Immersed pad in soldering bath at $245 \pm 5^{\circ}\text{C}$ for 5 ± 0.5 seconds.	75% or more of the immersed surface shall be covered with solder.
Temperature Characteristics	Specimens shall be measured within -10°C to $+50^{\circ}\text{C}$ temperature range.	The specimen shall meet the electrical specifications.
Dry Heat (Aging Test)	Temperature : $125 \pm 2^{\circ}\text{C}$ Duration : 250 hours	
Cold Resistance	Temperature : $-40 \pm 3^{\circ}\text{C}$ Duration : 96 hours	
Thermal Shock	Heat cycle conditions -55°C 25°C 85°C (30 min) (5 min) (30 min) Cycle time : 5 times	

TEST CIRCUIT

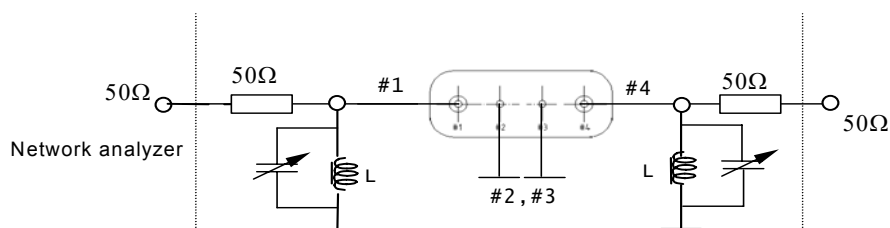

MARKING SPECIFICATION

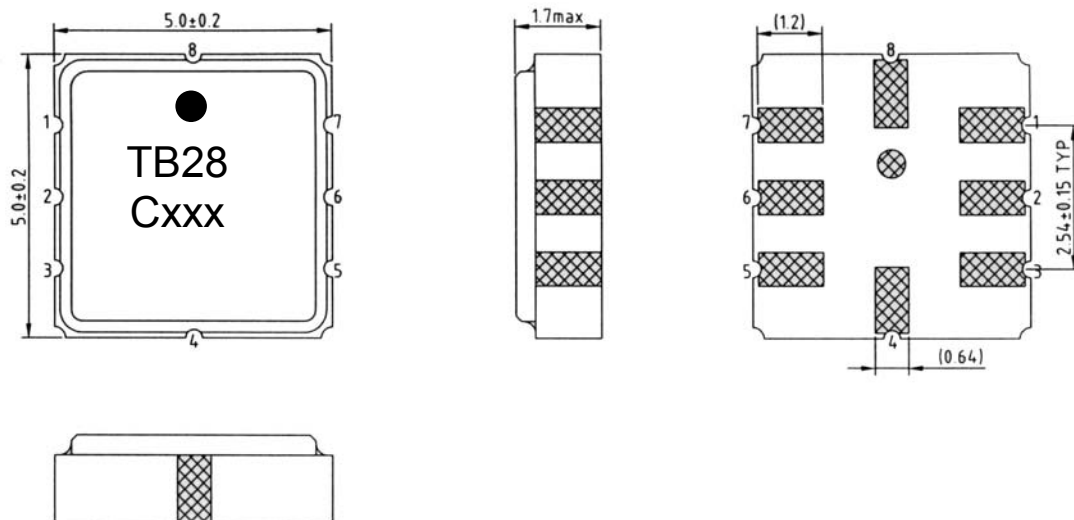

Where xxx is the lot number