

VOLTAGE REGULATOR WITH ON/OFF SWITCH

FEATURES

- Low Dropout Voltage
- Electronic ON/OFF Switch
- Very Low Standby Current (ON, No Load)
- Internal Thermal Shutdown
- Short Circuit Protection
- Very Low (<100 nA) Current in OFF Mode
- Customized Versions Are Available

DESCRIPTION

The TK114xx is a low power, linear regulator with a built-in electronic switch. The internal electronic switch can be controlled by an external pull-up resistor and an open drain or open collector transistor. The device is in the OFF state when the control pin is biased from V_{IN} through the pull-up resistor.

An internal PNP pass-transistor is used in order to achieve low dropout voltage (typically 200 mV at 50 mA load current). The device has very low quiescent current (500 μ A) in the ON mode with no load and 2 mA with 30 mA load. The quiescent current is typically 4 mA at 60 mA load. An internal thermal shutdown circuit limits the junction temperature to below 150 °C. The load current is internally monitored and the device will shut down (no load current) in the presence of a short circuit at the output. The device is available in a small SOT-23L surface mount package.

APPLICATIONS

- Battery Powered Systems
- Cellular Telephones
- Pagers
- Personal Communications Equipment
- Portable Instrumentation
- Portable Consumer Equipment
- Radio Control Systems
- Toys
- Low Voltage Systems

ORDERING INFORMATION

TK114

Tape/Reel Code
Voltage Code


VOLTAGE CODE

30 = 3.0 V	47 = 4.75 V
32 = 3.25 V	50 = 5.0 V
35 = 3.5 V	55 = 5.5 V
37 = 3.75 V	57 = 5.75 V
40 = 4.0 V	60 = 6.0 V
45 = 4.5 V	80 = 8.0 V


TAPE/REEL CODE

BX : Bulk/Bag
TL : Tape Left

TK114xxM

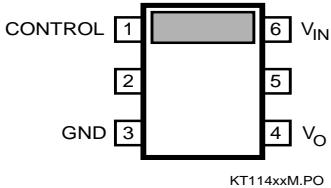

BLOCK DIAGRAM

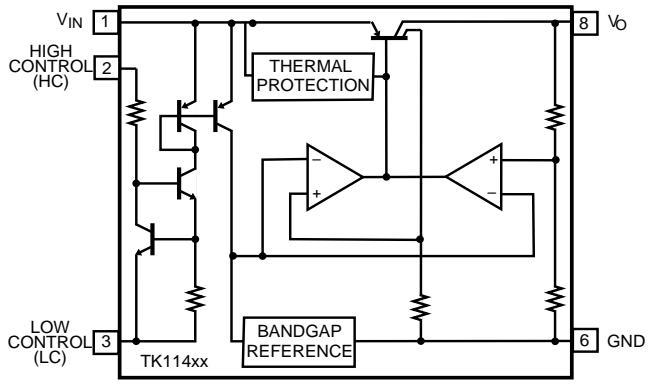

TK114xx

ABSOLUTE MAXIMUM RATINGS

Supply Voltage 16 V
 Load Current 180 mA
 Power Dissipation (Note 1) 400 mW
 Storage Temperature Range -55 to +150 °C


Operating Temperature Range -30 to +80 °C
 Lead Soldering Temp. (10 sec.) 240 °C
 Junction Temperature 150 °C

TK11430 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I _{IN1}	Supply Current 1	V _{IN} = 4 V, I _O = 0 mA		500	900	µA
I _{IN2}	Supply Current 2	V _{IN} = 2.5 V, I _O = 0 mA		1	2.5	µA
I _{INS}	Standby Current	V _{IN} = 10 V, Output Off			0.1	µA
V _O	Output Voltage Regulation	V _{IN} = 4 V, I _O = 30 mA	2.9	3.0	3.1	%
V _{DROP}	Dropout Voltage	I _O = 30 mA		0.12	0.3	V
I _O	Output Current		70	110		mA
I _{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	V _{IN} = 4 V → 9 V		5	30	mV
LoaReg	Load Regulation	I _O = 0 mA to 30 mA		18	50	mV
		I _O = 0 mA to 60 mA		36	80	mV
RR	Ripple Rejection	100 mV(rms), f = 400 Hz V _{IN} = 4.5 V, I _O = 10 mA		55		dB
ΔV/ΔT	V _O Temperature Coefficient	V _{IN} = 4.5 V, I _O = 10 mA -20 °C ≤ T _A ≤ 75 °C		±0.3		mV/°C
V _N	Output Noise Voltage	V _{IN} = 4.5 V, I _O = 10 mA		180		µV(rms)
Control Pin						
I _{CONT}	Control Pin Current	On Mode		35	120	µA
V _{Coff}	Control Pin Voltage	Off Mode	V _{IN} -0.2		V _{IN}	V
V _{Con}	Control Pin Voltage	On Mode	0		0.6	V

Note 1: Power dissipation must be derated at the rate of 1.6 mW/ °C for operation above T_A = 25 °C.

TEST CIRCUIT 1

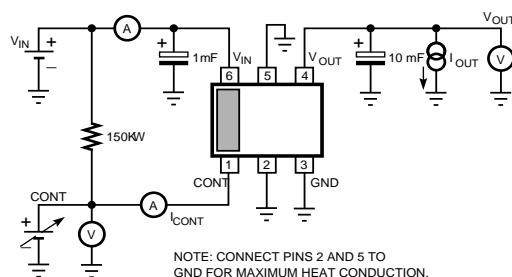

KT114xx • TC01A

TK11432 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I_{IN1}	Supply Current 1	$V_{IN} = 4.2 \text{ V}$, $I_O = 0 \text{ mA}$		500	900	μA
I_{IN2}	Supply Current 2	$V_{IN} = 2.5 \text{ V}$, $I_O = 0 \text{ mA}$		1	2.5	μA
I_{INS}	Standby Current	$V_{IN} = 10 \text{ V}$, Output Off			0.1	μA
V_O	Output Voltage Regulation	$V_{IN} = 4.2 \text{ V}$, $I_O = 30 \text{ mA}$	3.13	3.25	3.37	%
V_{DROP}	Dropout Voltage	$I_O = 30 \text{ mA}$		0.12	0.3	V
I_O	Output Current	(Note 2)	70	110		mA
I_{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	$V_{IN} = 4.2 \text{ V} \rightarrow 9.2 \text{ V}$		6	30	mV
LoaReg	Load Regulation	$V_{IN} = 4.2 \text{ V}$, $I_O = 0 \text{ mA}$ to 30 mA		20	50	mV
		$V_{IN} = 4.2 \text{ V}$, $I_O = 0 \text{ mA}$ to 60 mA		40	80	mV
RR	Ripple Rejection	100 mV(rms) , $f = 400 \text{ Hz}$ $V_{IN} = 4.7 \text{ V}$, $I_O = 10 \text{ mA}$		55		dB
$\Delta V/\Delta T$	V_O Temperature Coefficient	$V_{IN} = 4.7 \text{ V}$, $I_O = 10 \text{ mA}$ $-20^\circ\text{C} \leq T_A \leq 75^\circ\text{C}$		± 0.3		$\text{mV}/^\circ\text{C}$
V_N	Output Noise Voltage	$10 \text{ Hz} \leq f \leq 100 \text{ KHz}$, $I_O = 10 \text{ mA}$		180		$\mu\text{V(rms)}$
Control Pin						
I_{CONT}	Control Pin Current	On Mode		35	120	μA
V_{Coff}	Control Pin Voltage	Off Mode	$V_{IN}-0.2$		V_{IN}	V
V_{Con}	Control Pin Voltage	On Mode	0		0.6	V

Note 2: I_O (Load Current) is current when V_O drop down 0.3V from V_O at $I_O = 30 \text{ mA}$.

TK114xx

TK11435 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I_{IN1}	Supply Current 1	$V_{IN} = 4.5 \text{ V}$, $I_O = 0 \text{ mA}$		500	900	μA
I_{IN2}	Supply Current 2	$V_{IN} = 2.5 \text{ V}$, $I_O = 0 \text{ mA}$		1	2.5	μA
I_{INS}	Standby Current	$V_{IN} = 10 \text{ V}$, Output Off			0.1	μA
V_O	Output Voltage Regulation	$V_{IN} = 4.5 \text{ V}$, $I_O = 30 \text{ mA}$	3.38	3.5	3.62	%
V_{DROP}	Dropout Voltage	$I_O = 30 \text{ mA}$		0.12	0.3	V
I_O	Output Current	(Note 2)	70	110		mA
I_{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	$V_{IN} = 4.5 \text{ V} \rightarrow 9.5 \text{ V}$		7	35	mV
LoaReg	Load Regulation	$I_O = 0 \text{ mA} \text{ to } 30 \text{ mA}$		20	55	mV
		$I_O = 0 \text{ mA} \text{ to } 60 \text{ mA}$		40	95	mV
RR	Ripple Rejection	100 mV(rms), $f = 400 \text{ Hz}$ $V_{IN} = 4.5 \text{ V}$, $I_O = 10 \text{ mA}$		55		dB
$\Delta V/\Delta T$	V_O Temperature Coefficient	$V_{IN} = 4.5 \text{ V}$, $I_O = 10 \text{ mA}$ $-20^\circ\text{C} \leq T_A \leq 75^\circ\text{C}$		± 0.3		$\text{mV}/^\circ\text{C}$
V_N	Output Noise Voltage	$V_{IN} = 4.5 \text{ V}$, $I_O = 10 \text{ mA}$		180		$\mu\text{V(rms)}$
Control Pin						
I_{CONT}	Control Pin Current	On Mode		35	120	μA
V_{Coff}	Control Pin Voltage	Off Mode	$V_{IN}-0.2$		V_{IN}	V
V_{Con}	Control Pin Voltage	On Mode	0		0.6	V

Note 2: I_o (Load Current) is current when V_o drop down 0.3V from V_o at $I_o = 30 \text{ mA}$.

TK11437 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I_{IN1}	Supply Current 1	$V_{IN} = 4.7 \text{ V}$, $I_O = 0 \text{ mA}$		500	900	μA
I_{IN2}	Supply Current 2	$V_{IN} = 2.7 \text{ V}$, $I_O = 0 \text{ mA}$		1	2.5	μA
I_{INS}	Standby Current	$V_{IN} = 10 \text{ V}$, Output Off			0.1	μA
V_O	Output Voltage Regulation	$V_{IN} = 4.7 \text{ V}$, $I_O = 30 \text{ mA}$	3.62	3.75	3.88	%
V_{DROP}	Dropout Voltage	$I_O = 30 \text{ mA}$		0.12	0.3	V
I_O	Output Current	(Note 2)	70	110		mA
I_{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	$V_{IN} = 4.7 \text{ V} \rightarrow 9.7 \text{ V}$		7	35	mV
LoaReg	Load Regulation	$I_O = 0 \text{ mA} \text{ to } 30 \text{ mA}$		20	110	mV
		$I_O = 0 \text{ mA} \text{ to } 60 \text{ mA}$		40	100	mV
RR	Ripple Rejection	100 mV(rms) , $f = 400 \text{ Hz}$ $V_{IN} = 5.2 \text{ V}$, $I_O = 10 \text{ mA}$		55		dB
$\Delta V/\Delta T$	V_O Temperature Coefficient	$V_{IN} = 5.2 \text{ V}$, $I_O = 10 \text{ mA}$ $-20^\circ\text{C} \leq T_A \leq 75^\circ\text{C}$		± 0.4		$\text{mV}/^\circ\text{C}$
V_N	Output Noise Voltage	$V_{IN} = 4.5 \text{ V}$, $I_O = 10 \text{ mA}$		180		$\mu\text{V(rms)}$
Control Pin						
I_{CONT}	Control Pin Current	On Mode		35	120	μA
V_{Coff}	Control Pin Voltage	Off Mode	$V_{IN}-0.2$		V_{IN}	V
V_{Con}	Control Pin Voltage	On Mode	0		0.6	V

Note 2: I_o (Load Current) is current when V_o drop down 0.3V from V_o at $I_o = 30 \text{ mA}$.

TK114xx

TK11440 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I_{IN1}	Supply Current 1	$V_{IN} = 5 \text{ V}$, $I_O = 0 \text{ mA}$		500	900	μA
I_{IN2}	Supply Current 2	$V_{IN} = 3.0 \text{ V}$, $I_O = 0 \text{ mA}$		1	2.5	μA
I_{INS}	Standby Current	$V_{IN} = 10 \text{ V}$, Output Off			0.1	μA
V_O	Output Voltage Regulation	$V_{IN} = 5 \text{ V}$, $I_O = 30 \text{ mA}$	3.86	4.0	3.1	%
V_{DROP}	Dropout Voltage	$I_O = 30 \text{ mA}$		0.12	0.3	V
I_O	Output Current	(Note 2)	70	110		mA
I_{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	$V_{IN} = 5 \text{ V} \rightarrow 10 \text{ V}$		8	40	mV
LoaReg	Load Regulation	$I_O = 0 \text{ mA} \text{ to } 30 \text{ mA}$		24	60	mV
		$I_O = 0 \text{ mA} \text{ to } 60 \text{ mA}$		48	100	mV
RR	Ripple Rejection	100 mV(rms) , $f = 400 \text{ Hz}$ $V_{IN} = 5.5 \text{ V}$, $I_O = 10 \text{ mA}$		55		dB
$\Delta V/\Delta T$	V_O Temperature Coefficient	$V_{IN} = 5.5 \text{ V}$, $I_O = 10 \text{ mA}$ $-20^\circ\text{C} \leq T_A \leq 75^\circ\text{C}$		± 0.4		$\text{mV}/^\circ\text{C}$
V_N	Output Noise Voltage	$V_{IN} = 5.5 \text{ V}$, $I_O = 10 \text{ mA}$		180		$\mu\text{V(rms)}$
Control Pin						
I_{CONT}	Control Pin Current	On Mode		35	120	μA
V_{Coff}	Control Pin Voltage	Off Mode	$V_{IN}-0.2$		V_{IN}	V
V_{Con}	Control Pin Voltage	On Mode	0		0.6	V

Note 2: I_o (Load Current) is current when V_o drop down 0.3V from V_o at $I_o = 30 \text{ mA}$.

TK11445 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I_{IN1}	Supply Current 1	$V_{IN} = 5 \text{ V}$, $I_O = 0 \text{ mA}$		500	900	μA
I_{IN2}	Supply Current 2	$V_{IN} = 3.5 \text{ V}$, $I_O = 0 \text{ mA}$		1	2.5	μA
I_{INS}	Standby Current	$V_{IN} = 10 \text{ V}$, Output Off			0.1	μA
V_O	Output Voltage Regulation	$V_{IN} = 5.5 \text{ V}$, $I_O = 30 \text{ mA}$	4.34	4.5	4.66	%
V_{DROP}	Dropout Voltage	$I_O = 30 \text{ mA}$		0.12	0.3	V
I_O	Output Current	(Note 2)	70	110		mA
I_{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	$V_{IN} = 5.5 \text{ V} \rightarrow 10.5 \text{ V}$		8	40	mV
LoaReg	Load Regulation	$I_O = 0 \text{ mA} \text{ to } 30 \text{ mA}$		25	65	mV
		$I_O = 0 \text{ mA} \text{ to } 60 \text{ mA}$		55	110	mV
RR	Ripple Rejection	100 mV(rms), $f = 400 \text{ Hz}$ $V_{IN} = 6 \text{ V}$, $I_O = 10 \text{ mA}$		55		dB
$\Delta V/\Delta T$	V_O Temperature Coefficient	$V_{IN} = 6 \text{ V}$, $I_O = 10 \text{ mA}$ $-20^\circ\text{C} \leq T_A \leq 75^\circ\text{C}$		± 0.5		$\text{mV}/^\circ\text{C}$
V_N	Output Noise Voltage	$V_{IN} = 6 \text{ V}$, $I_O = 10 \text{ mA}$		180		$\mu\text{V(rms)}$
Control Pin						
I_{CONT}	Control Pin Current	On Mode		35	120	μA
V_{Coff}	Control Pin Voltage	Off Mode	$V_{IN}-0.2$		V_{IN}	V
V_{Con}	Control Pin Voltage	On Mode	0		0.6	V

Note 2: I_o (Load Current) is current when V_o drop down 0.3V from V_o at $I_o = 30 \text{ mA}$.

TK114xx

TK11447 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I_{IN1}	Supply Current 1	$V_{IN} = 5.7 \text{ V}$, $I_O = 0 \text{ mA}$		500	900	μA
I_{IN2}	Supply Current 2	$V_{IN} = 3.7 \text{ V}$, $I_O = 0 \text{ mA}$		1	2.5	μA
I_{INS}	Standby Current	$V_{IN} = 10 \text{ V}$, Output Off			0.1	μA
V_O	Output Voltage Regulation	$V_{IN} = 5.7 \text{ V}$, $I_O = 30 \text{ mA}$	4.58	4.75	4.92	%
V_{DROP}	Dropout Voltage	$I_O = 30 \text{ mA}$		0.12	0.3	V
I_O	Output Current	(Note 2)	70	110		mA
I_{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	$V_{IN} = 5.7 \text{ V} \rightarrow 10.7 \text{ V}$		8	40	mV
LoaReg	Load Regulation	$I_O = 0 \text{ mA} \text{ to } 30 \text{ mA}$		25	70	mV
		$I_O = 0 \text{ mA} \text{ to } 60 \text{ mA}$		50	120	mV
RR	Ripple Rejection	100 mV(rms), $f = 400 \text{ Hz}$ $V_{IN} = 6.2 \text{ V}$, $I_O = 10 \text{ mA}$		55		dB
$\Delta V/\Delta T$	V_O Temperature Coefficient	$V_{IN} = 6.2 \text{ V}$, $I_O = 10 \text{ mA}$ $-20^\circ\text{C} \leq T_A \leq 75^\circ\text{C}$		± 0.6		mV/°C
V_N	Output Noise Voltage	$V_{IN} = 6.2 \text{ V}$, $I_O = 10 \text{ mA}$		180		$\mu\text{V(rms)}$
Control Pin						
I_{CONT}	Control Pin Current	On Mode		35	120	μA
V_{Coff}	Control Pin Voltage	Off Mode	$V_{IN}-0.2$		V_{IN}	V
V_{Con}	Control Pin Voltage	On Mode	0		0.6	V

Note 2: I_o (Load Current) is current when V_o drop down 0.3V from V_o at $I_o = 30 \text{ mA}$.

TK11450 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I_{IN1}	Supply Current 1	$V_{IN} = 6.0 \text{ V}$, $I_O = 0 \text{ mA}$		500	900	μA
I_{IN2}	Supply Current 2	$V_{IN} = 4.0 \text{ V}$, $I_O = 0 \text{ mA}$		1	2.5	μA
I_{INS}	Standby Current	$V_{IN} = 10 \text{ V}$, Output Off			0.1	μA
V_O	Output Voltage Regulation	$V_{IN} = 6.0 \text{ V}$, $I_O = 30 \text{ mA}$	4.83	5.0	5.17	%
V_{DROP}	Dropout Voltage	$I_O = 30 \text{ mA}$		0.12	0.3	V
I_O	Output Current	(Note 2)	70	110		mA
I_{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	$V_{IN} = 6 \text{ V} \rightarrow 11 \text{ V}$		8	40	mV
LoaReg	Load Regulation	$I_O = 0 \text{ mA} \text{ to } 30 \text{ mA}$		25	70	mV
		$I_O = 0 \text{ mA} \text{ to } 60 \text{ mA}$		60	120	mV
RR	Ripple Rejection	100 mV(rms) , $f = 400 \text{ Hz}$ $V_{IN} = 6.5 \text{ V}$, $I_O = 10 \text{ mA}$		55		dB
$\Delta V/\Delta T$	V_O Temperature Coefficient	$V_{IN} = 6.5 \text{ V}$, $I_O = 10 \text{ mA}$ $-20^\circ\text{C} \leq T_A \leq 75^\circ\text{C}$		± 0.6		$\text{mV}/^\circ\text{C}$
V_N	Output Noise Voltage	$V_{IN} = 6.5 \text{ V}$, $I_O = 10 \text{ mA}$		180		$\mu\text{V(rms)}$
Control Pin						
I_{CONT}	Control Pin Current	On Mode		35	120	μA
V_{Coff}	Control Pin Voltage	Off Mode	$V_{IN}-0.2$		V_{IN}	V
V_{Con}	Control Pin Voltage	On Mode	0		0.6	V

Note 2: I_o (Load Current) is current when V_o drop down 0.3V from V_o at $I_o = 30 \text{ mA}$.

TK114xx

TK11455 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I_{IN1}	Supply Current 1	$V_{IN} = 6.5 \text{ V}$, $I_O = 0 \text{ mA}$		500	900	μA
I_{IN2}	Supply Current 2	$V_{IN} = 4.5 \text{ V}$, $I_O = 0 \text{ mA}$		1	2.5	μA
I_{INS}	Standby Current	$V_{IN} = 10 \text{ V}$, Output Off			0.1	μA
V_O	Output Voltage Regulation	$V_{IN} = 6.5 \text{ V}$, $I_O = 30 \text{ mA}$	5.31	5.5	5.69	%
V_{DROP}	Dropout Voltage	$I_O = 30 \text{ mA}$		0.12	0.3	V
I_O	Output Current	(Note 2)	70	110		mA
I_{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	$V_{IN} = 6.5 \text{ V} \rightarrow 11.5 \text{ V}$		8	40	mV
LoaReg	Load Regulation	$I_O = 0 \text{ mA} \text{ to } 30 \text{ mA}$		30	75	mV
		$I_O = 0 \text{ mA} \text{ to } 60 \text{ mA}$		65	130	mV
RR	Ripple Rejection	100 mV(rms) , $f = 400 \text{ Hz}$ $V_{IN} = 7.0 \text{ V}$, $I_O = 10 \text{ mA}$		55		dB
$\Delta V/\Delta T$	V_O Temperature Coefficient	$V_{IN} = 7.0 \text{ V}$, $I_O = 10 \text{ mA}$ $-20^\circ\text{C} \leq T_A \leq 75^\circ\text{C}$		± 0.7		$\text{mV}/^\circ\text{C}$
V_N	Output Noise Voltage	$V_{IN} = 7.0 \text{ V}$, $I_O = 10 \text{ mA}$		180		$\mu\text{V(rms)}$
Control Pin						
I_{CONT}	Control Pin Current	On Mode		35	120	μA
V_{Coff}	Control Pin Voltage	Off Mode	$V_{IN}-0.2$		V_{IN}	V
V_{Con}	Control Pin Voltage	On Mode	0		0.6	V

Note 2: I_o (Load Current) is current when V_o drop down 0.3V from V_o at $I_o = 30 \text{ mA}$.

TK11460 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I_{IN1}	Supply Current 1	$V_{IN} = 7.0 \text{ V}$, $I_O = 0 \text{ mA}$		500	900	μA
I_{IN2}	Supply Current 2	$V_{IN} = 5.0 \text{ V}$, $I_O = 0 \text{ mA}$		1	3.0	μA
I_{INS}	Standby Current	$V_{IN} = 10 \text{ V}$, Output Off			0.1	μA
V_O	Output Voltage Regulation	$V_{IN} = 7.0 \text{ V}$, $I_O = 30 \text{ mA}$	5.79	6.0	6.21	%
V_{DROP}	Dropout Voltage	$I_O = 30 \text{ mA}$		0.12	0.3	V
I_O	Output Current	(Note 2)	70	110		mA
I_{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	$V_{IN} = 7.0 \text{ V} \rightarrow 12 \text{ V}$		8	40	mV
LoaReg	Load Regulation	$I_O = 0 \text{ mA} \text{ to } 30 \text{ mA}$		30	80	mV
		$I_O = 0 \text{ mA} \text{ to } 60 \text{ mA}$		65	140	mV
RR	Ripple Rejection	100 mV(rms), $f = 400 \text{ Hz}$ $V_{IN} = 7.5 \text{ V}$, $I_O = 10 \text{ mA}$		55		dB
$\Delta V/\Delta T$	V_O Temperature Coefficient	$V_{IN} = 7.5 \text{ V}$, $I_O = 10 \text{ mA}$ $-20^\circ\text{C} \leq T_A \leq 75^\circ\text{C}$		± 0.7		$\text{mV}/^\circ\text{C}$
V_N	Output Noise Voltage	$V_{IN} = 7.5 \text{ V}$, $I_O = 10 \text{ mA}$		180		$\mu\text{V(rms)}$
Control Pin						
I_{CONT}	Control Pin Current	On Mode		35	120	μA
V_{Coff}	Control Pin Voltage	Off Mode	$V_{IN}-0.2$		V_{IN}	V
V_{Con}	Control Pin Voltage	On Mode	0		0.6	V

Note 2: I_o (Load Current) is current when V_o drop down 0.3V from V_o at $I_o = 30 \text{ mA}$.

TK114xx







TK11480 ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNITS
I_{IN1}	Supply Current 1	$V_{IN} = 9.0 \text{ V}$, $I_O = 0 \text{ mA}$		500	900	μA
I_{IN2}	Supply Current 2	$V_{IN} = 7.0 \text{ V}$, $I_O = 0 \text{ mA}$		1	3.0	μA
I_{INS}	Standby Current	$V_{IN} = 10 \text{ V}$, Output Off			0.1	μA
V_O	Output Voltage Regulation	$V_{IN} = 9.0 \text{ V}$, $I_O = 30 \text{ mA}$	7.72	8.0	8.28	%
V_{DROP}	Dropout Voltage	$I_O = 30 \text{ mA}$		0.12	0.3	V
I_O	Output Current	(Note 2)	70	110		mA
I_{OR}	Recommended Output Current				70	mA
LinReg	Line Regulation	$V_{IN} = 9 \text{ V} \rightarrow 13 \text{ V}$		8	40	mV
LoaReg	Load Regulation	$I_O = 0 \text{ mA} \text{ to } 30 \text{ mA}$		30	100	mV
		$I_O = 0 \text{ mA} \text{ to } 60 \text{ mA}$		65	180	mV
RR	Ripple Rejection	100 mV(rms), $f = 400 \text{ Hz}$ $V_{IN} = 9.5 \text{ V}$, $I_O = 10 \text{ mA}$		55		dB
$\Delta V/\Delta T$	V_O Temperature Coefficient	$V_{IN} = 9.5 \text{ V}$, $I_O = 10 \text{ mA}$ $-20^\circ\text{C} \leq T_A \leq 75^\circ\text{C}$		± 0.7		mV/°C
V_N	Output Noise Voltage	$V_{IN} = 9.5 \text{ V}$, $I_O = 10 \text{ mA}$		220		$\mu\text{V(rms)}$
Control Pin						
I_{CONT}	Control Pin Current	On Mode		35	120	μA
V_{Coff}	Control Pin Voltage	Off Mode	$V_{IN}-0.2$		V_{IN}	V
V_{Con}	Control Pin Voltage	On Mode	0		0.6	V




Note 2: I_o (Load Current) is current when V_o drop down 0.3V from V_o at $I_o = 30 \text{ mA}$.

TYPICAL PERFORMANCE CHARACTERISTICS

TK11430

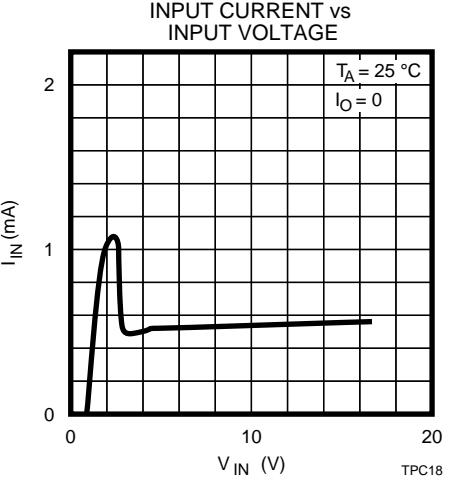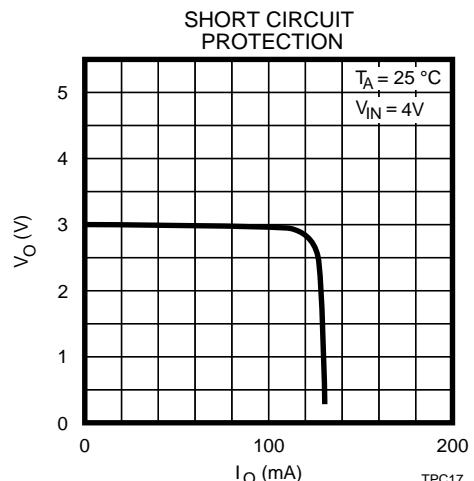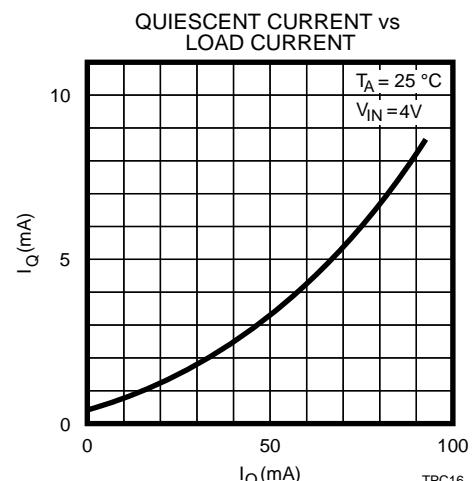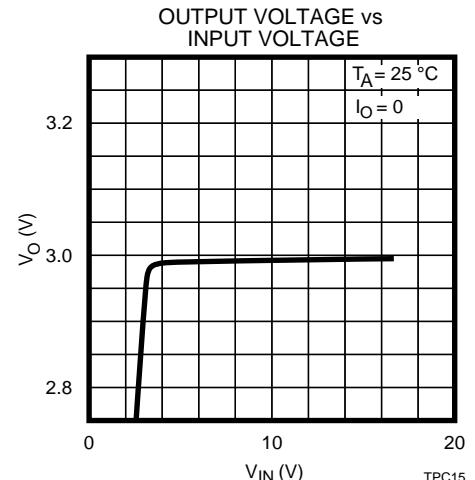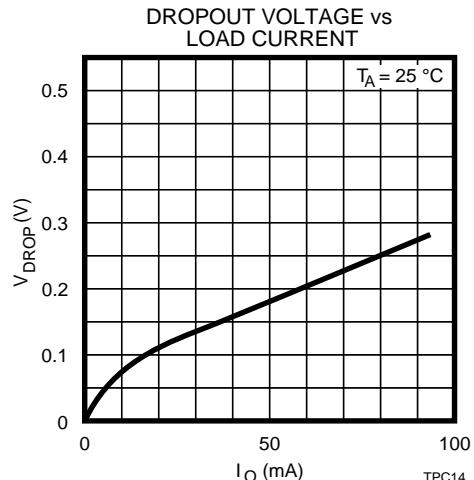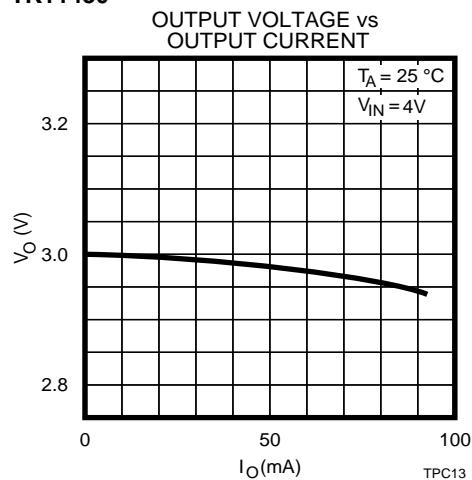




TK11435

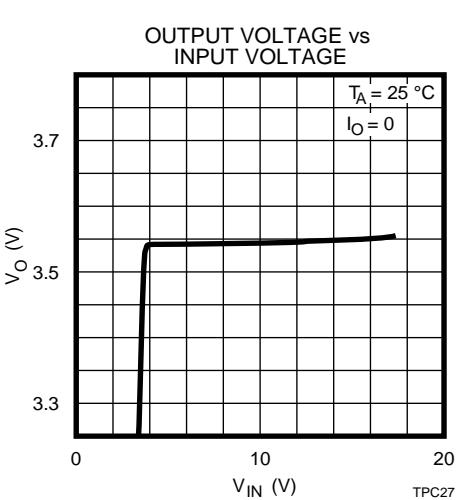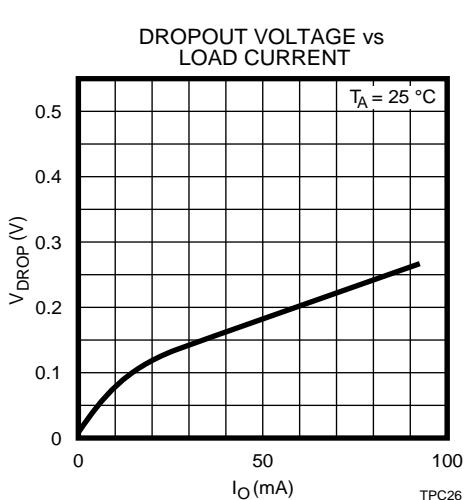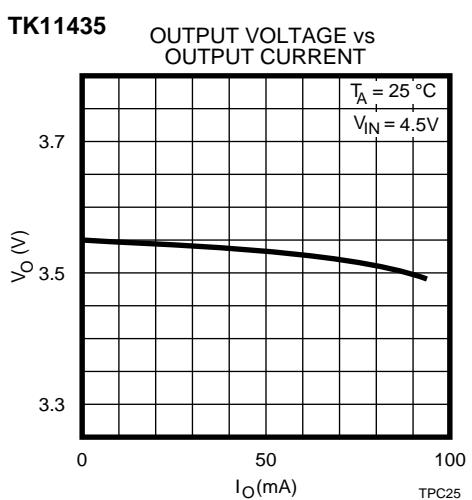







TK114xx

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

TK11435 (CONT.)




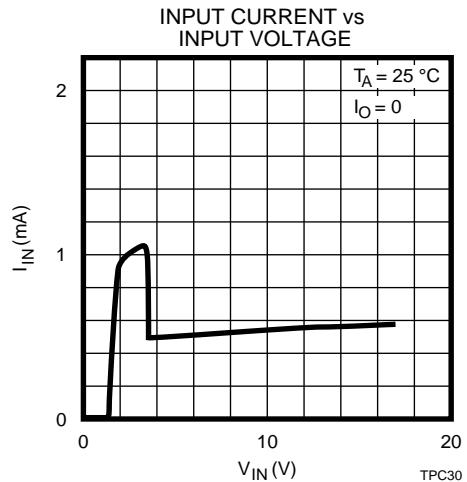
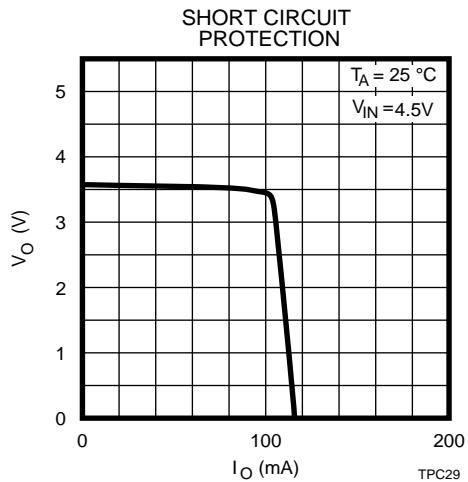
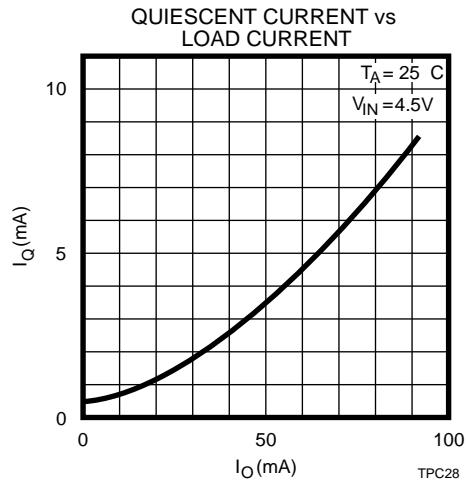


TK11437

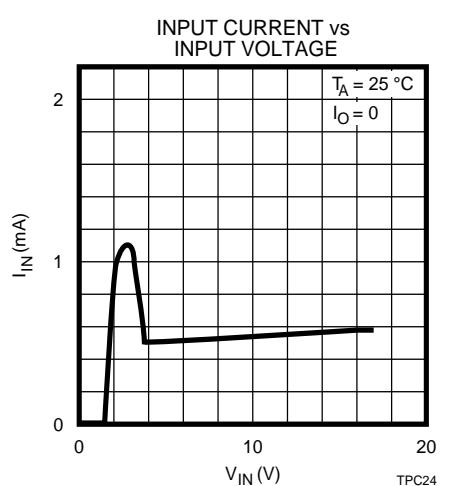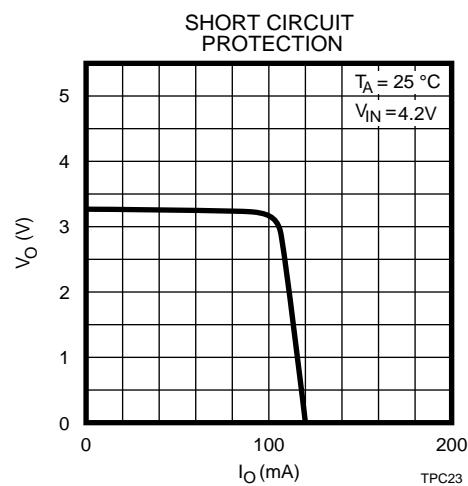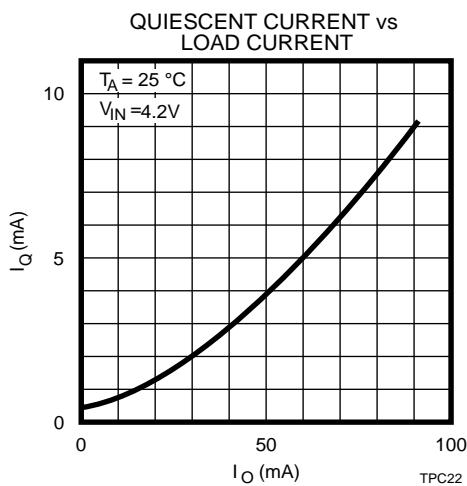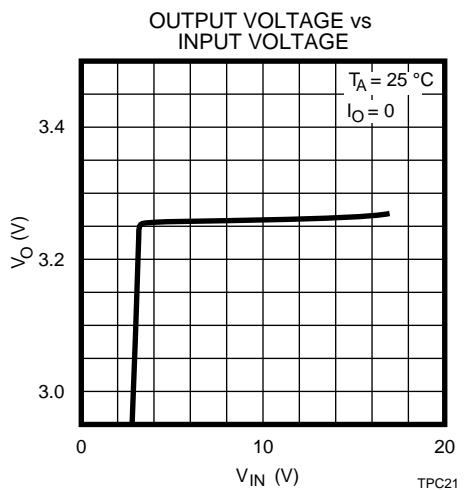
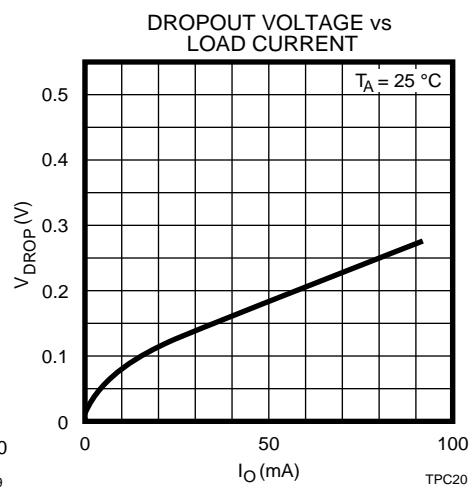
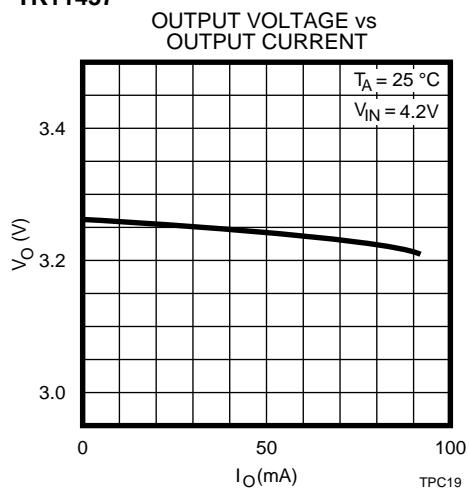


TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

TK11440

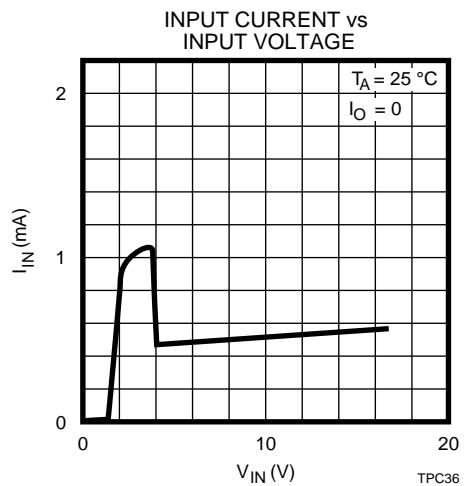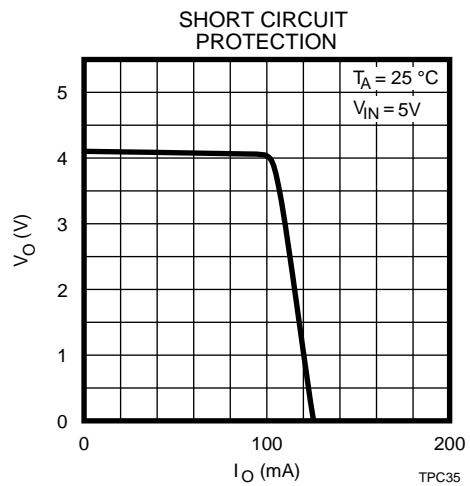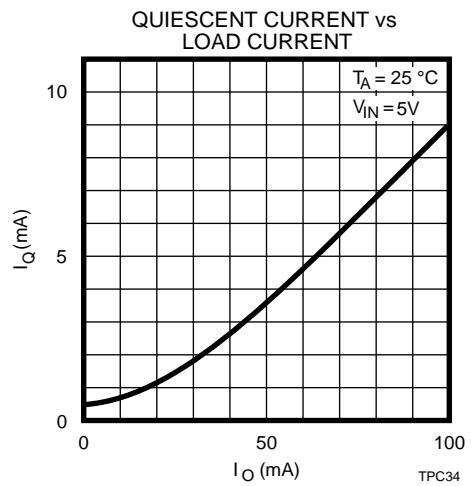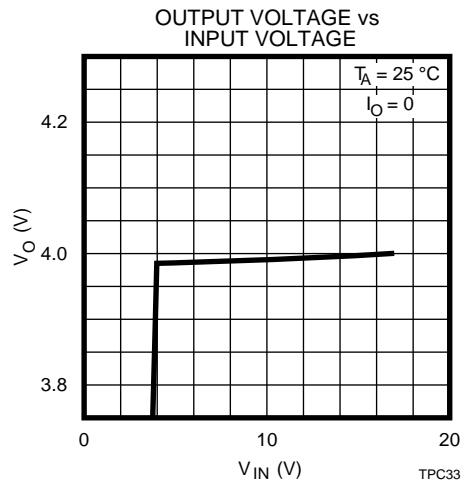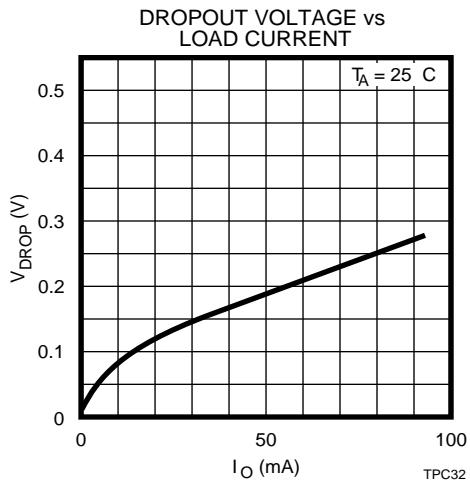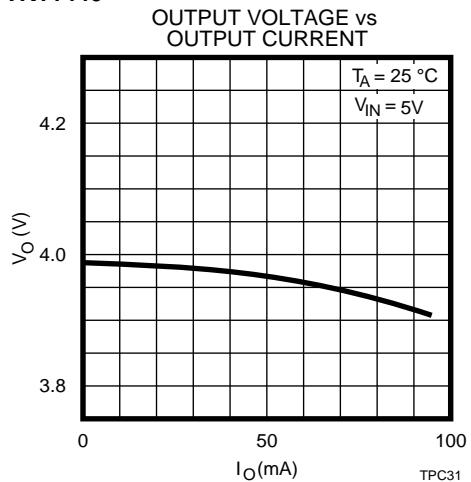




TK11445

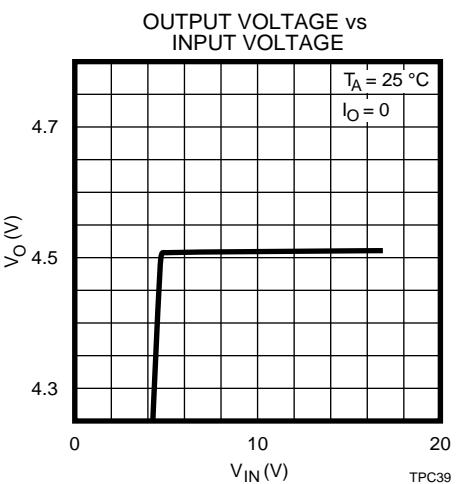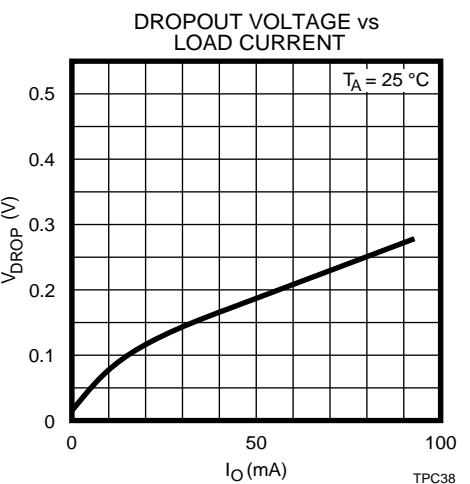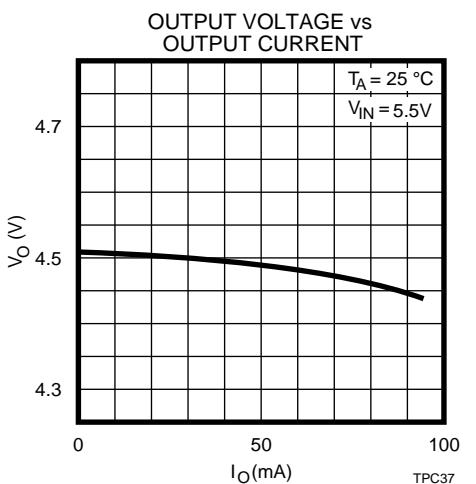




TK114xx

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)


TK11445 (CONT.)

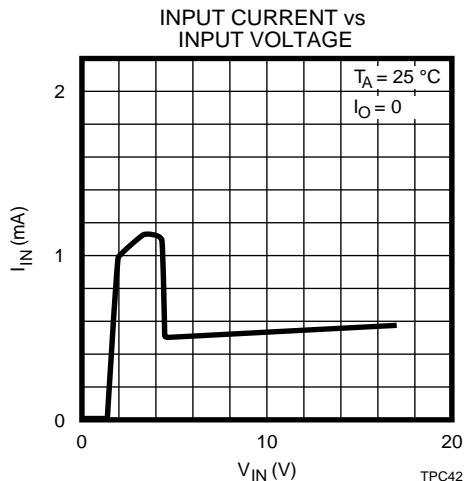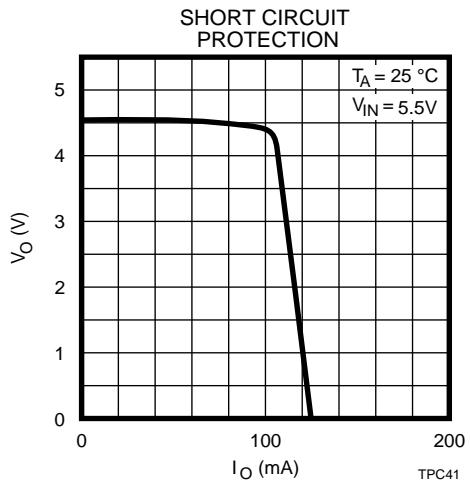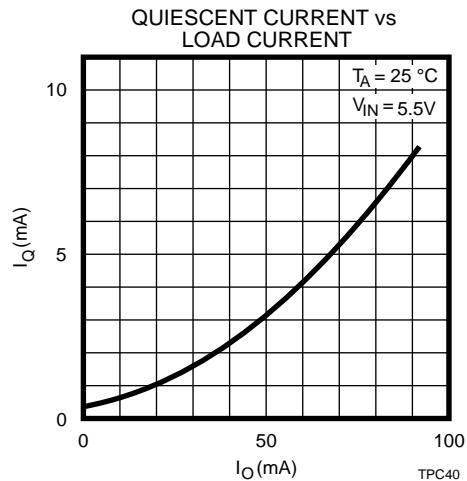


TK11447 OUTPUT VOLTAGE vs OUTPUT CURRENT

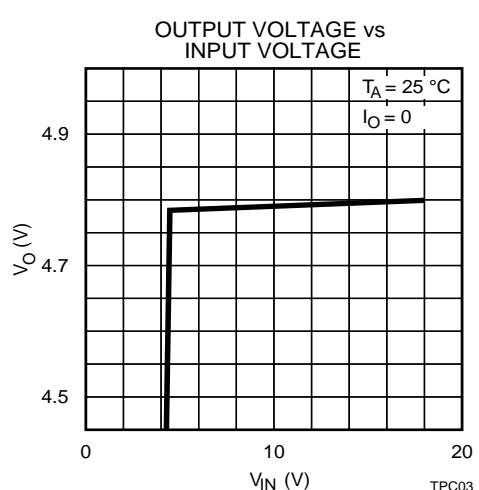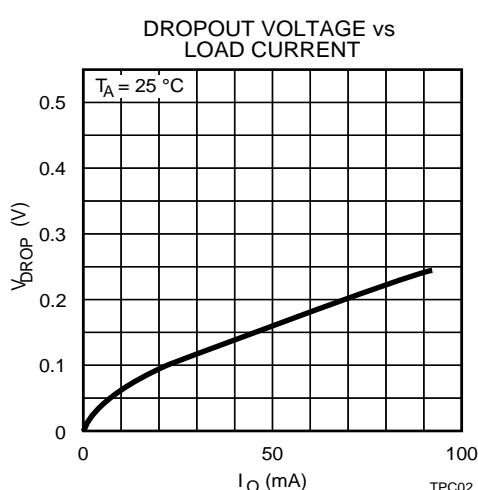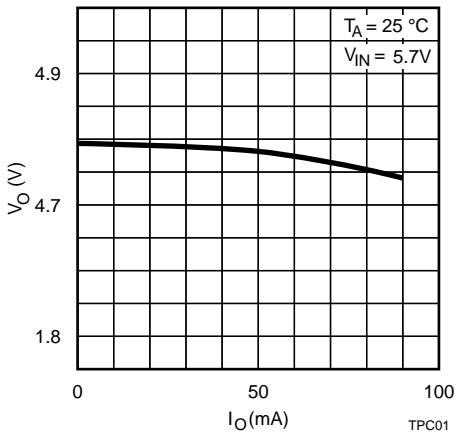


INPUT CURRENT vs INPUT VOLTAGE

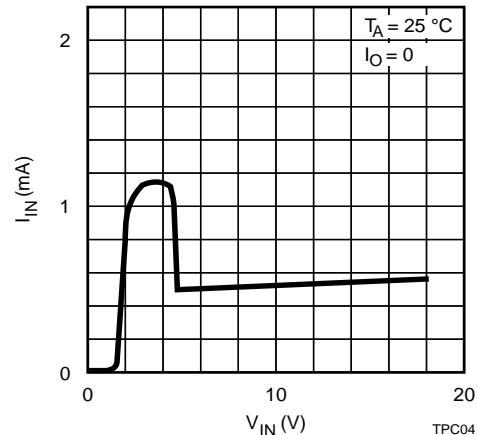

QUIESCENT CURRENT vs LOAD CURRENT






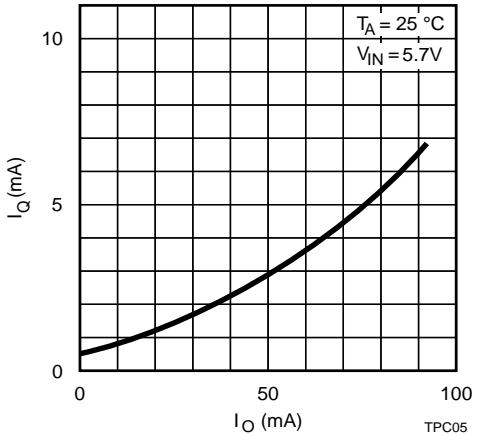


INPUT CURRENT vs INPUT VOLTAGE



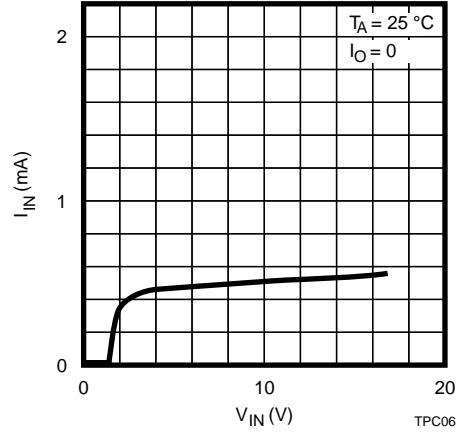


TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

TK11450

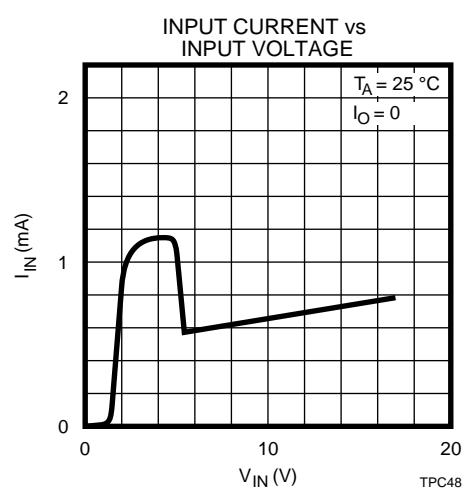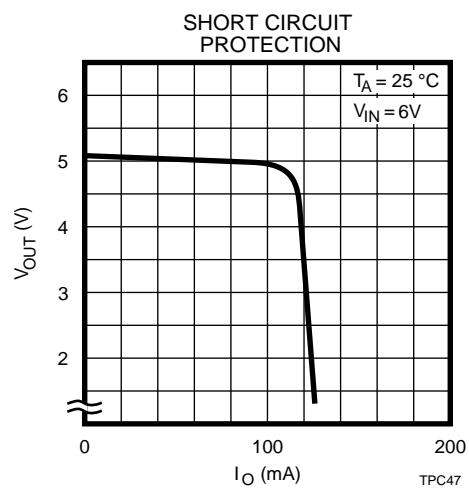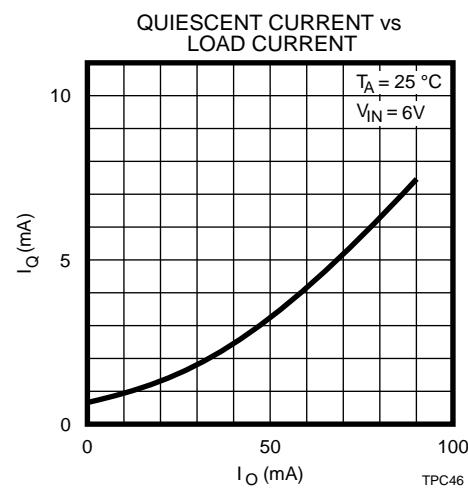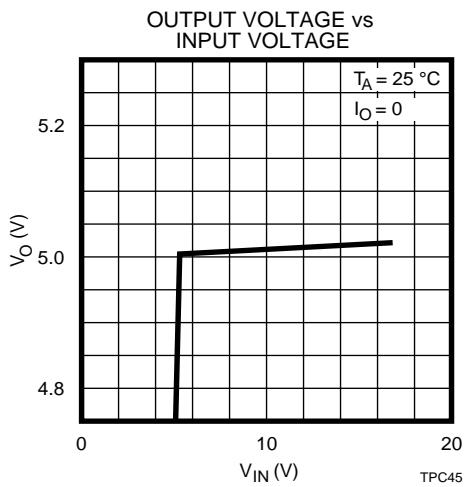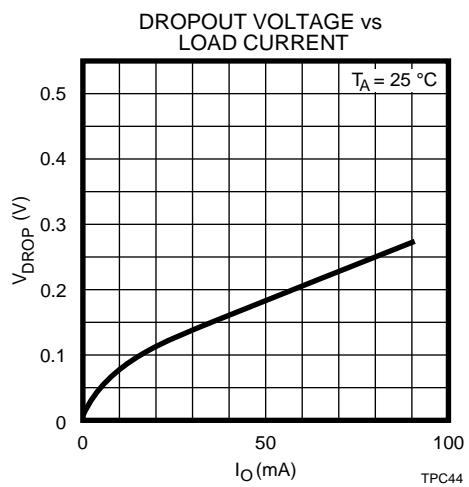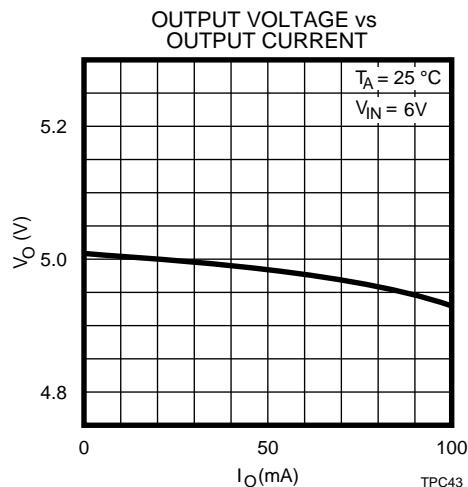




TK11455

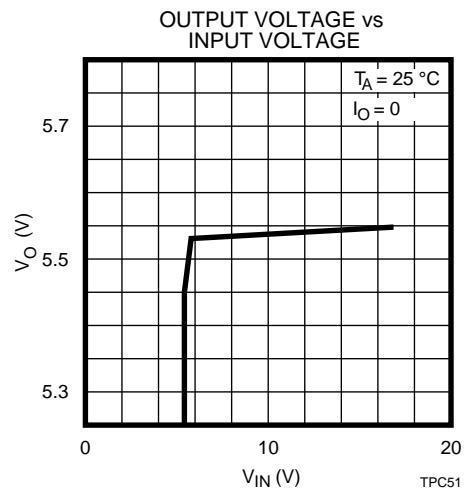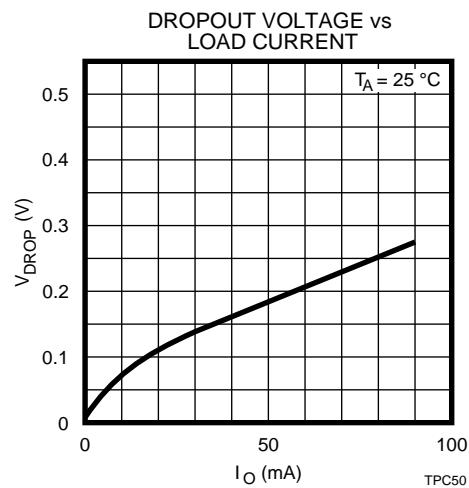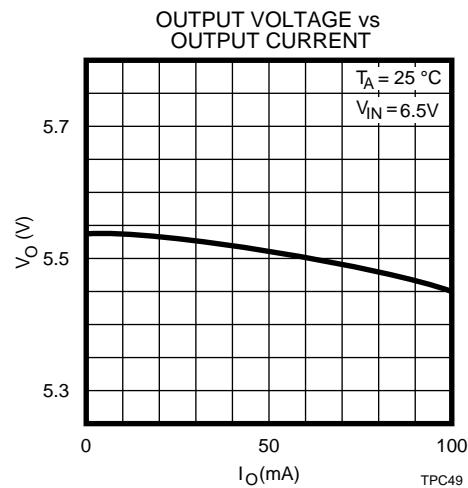







TK114xx

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

TK11455 (CONT.)







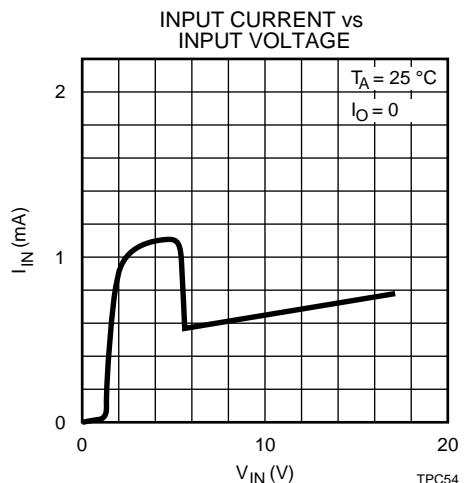
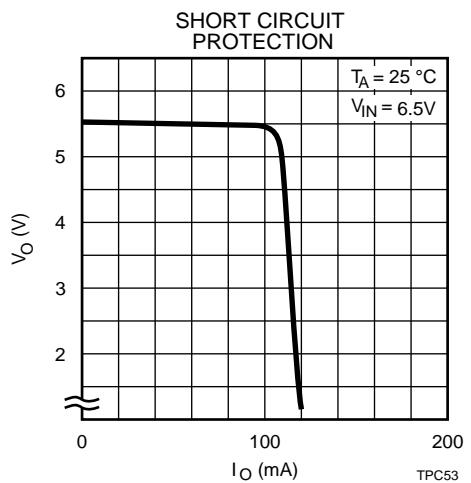
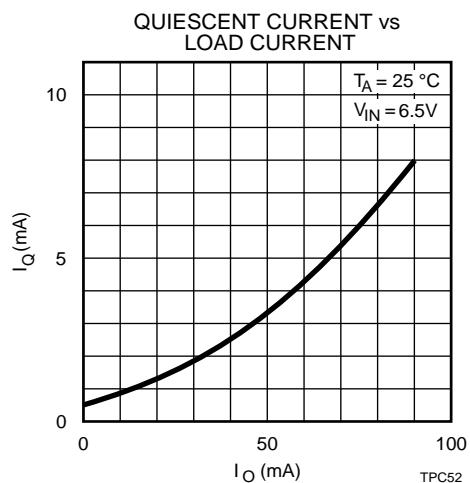


TK11460

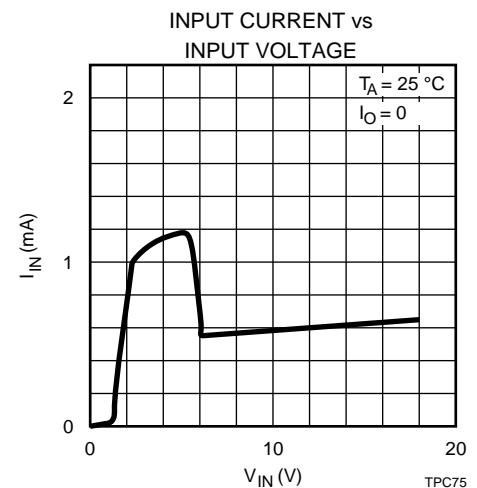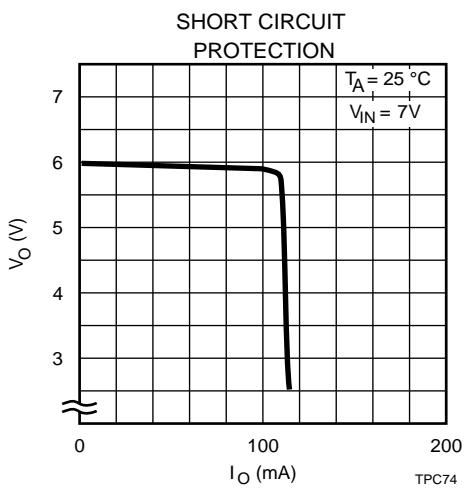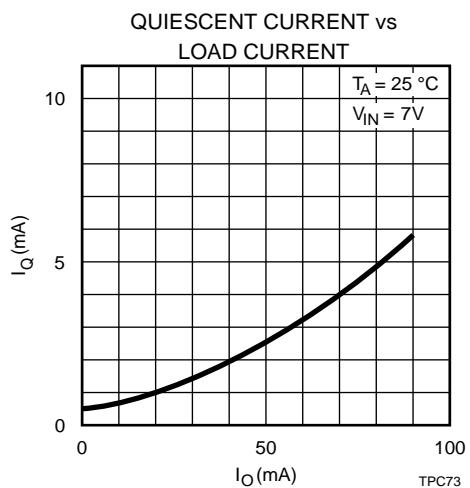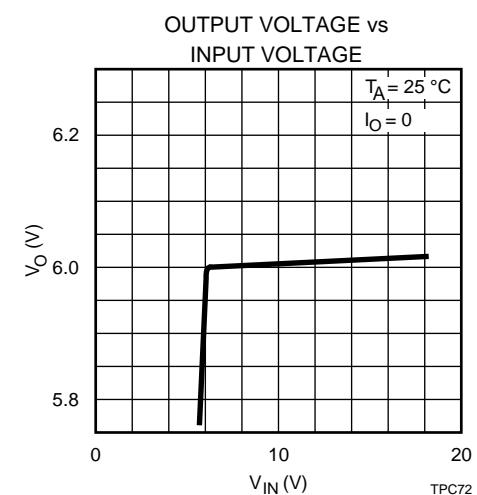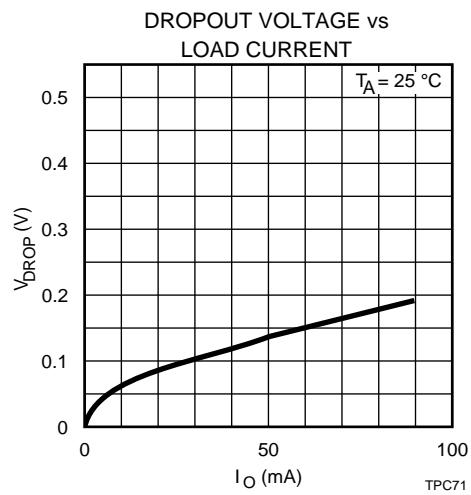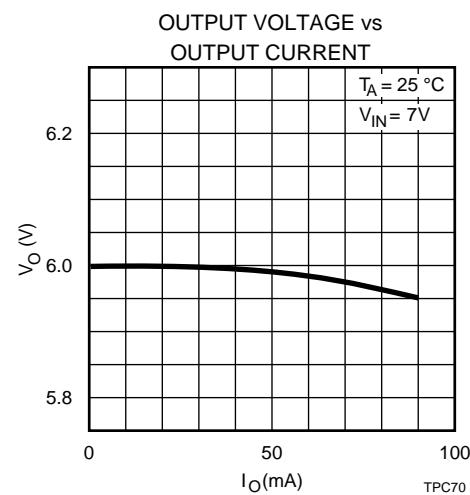

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)


TK11480

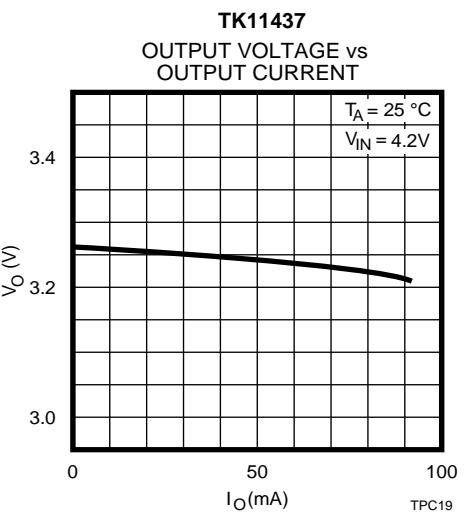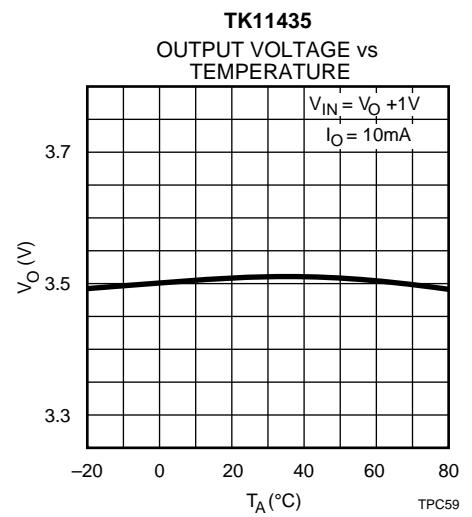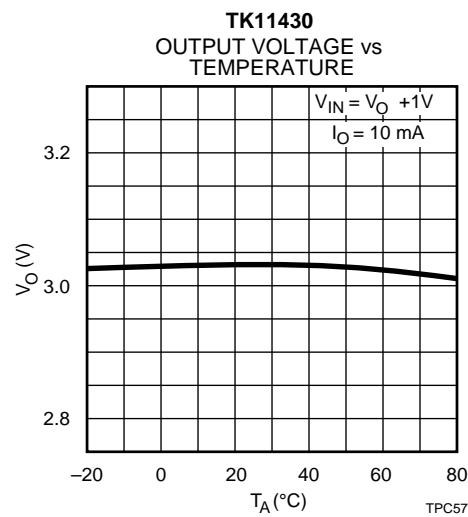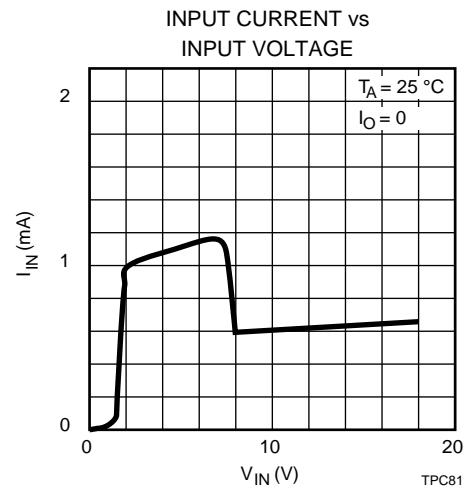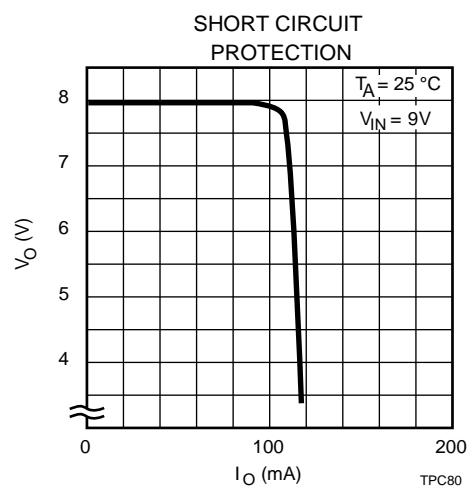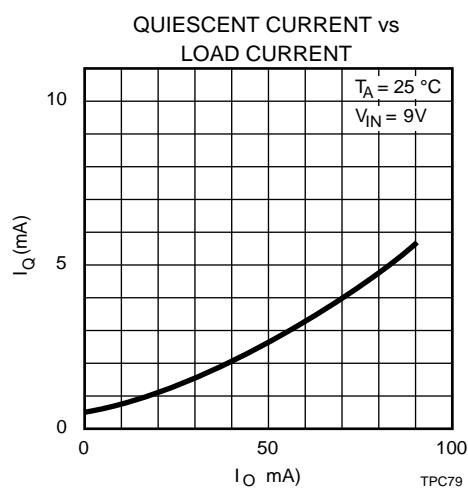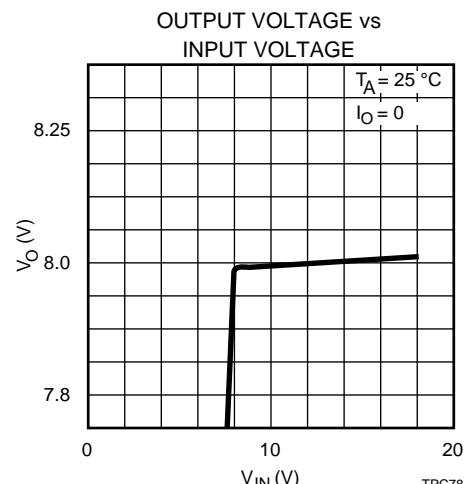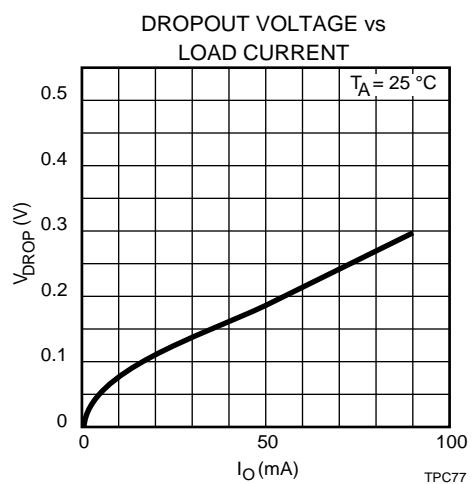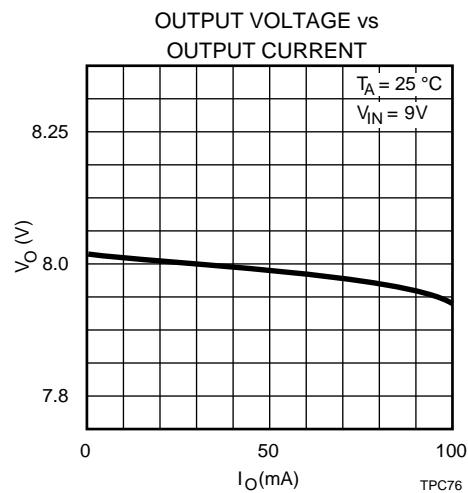


TK114xx

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)


TK11440

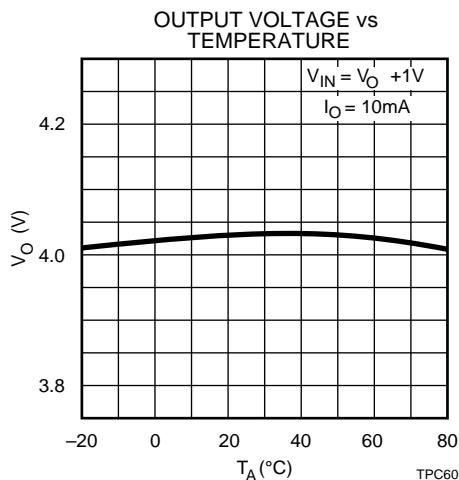


TK11445

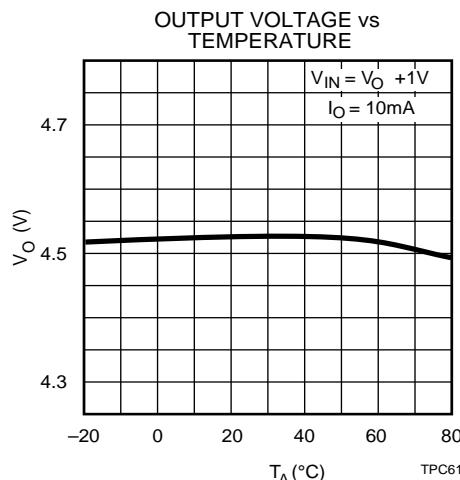


TK11447

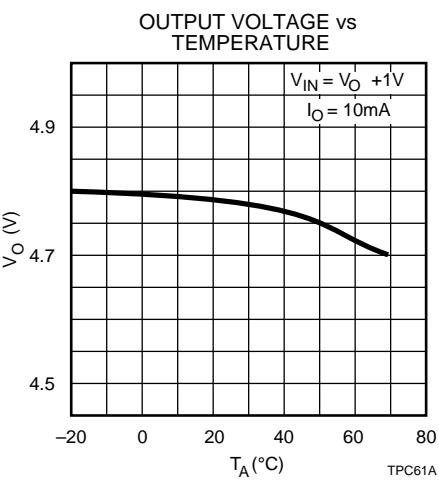


TK11450

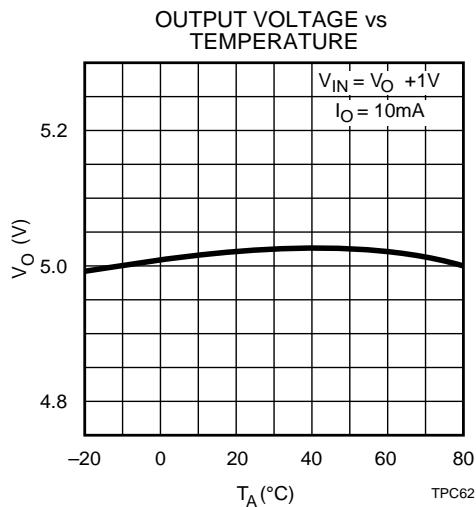


TK11457

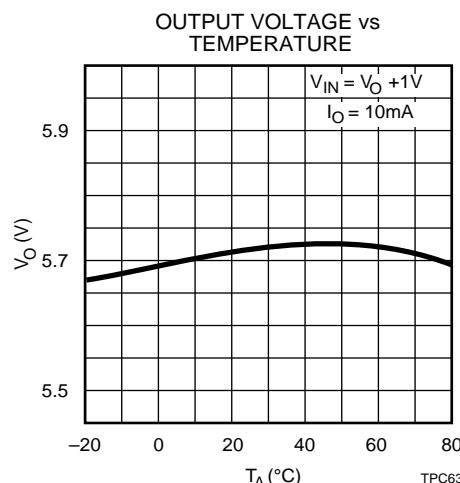

TK11460








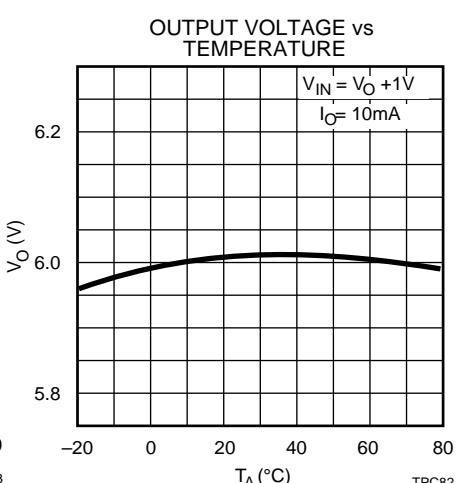


TK11480

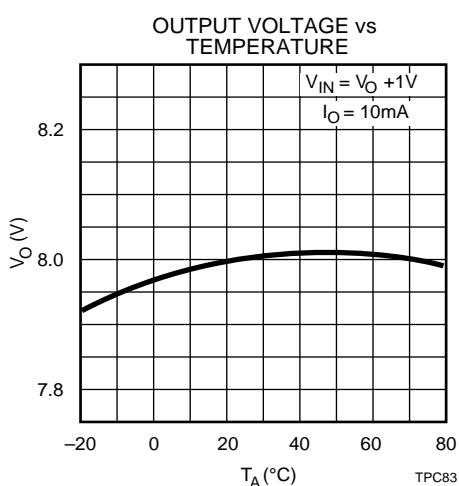


TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

COMMON CHARACTERISTICS

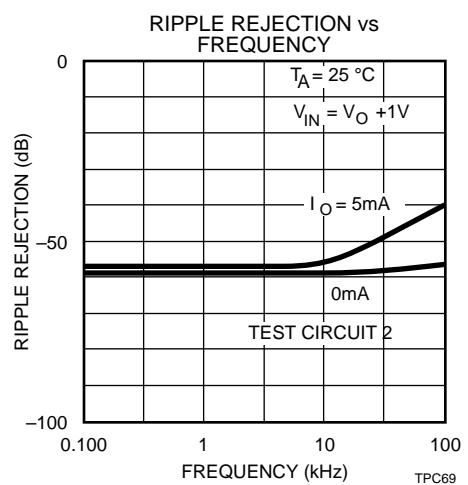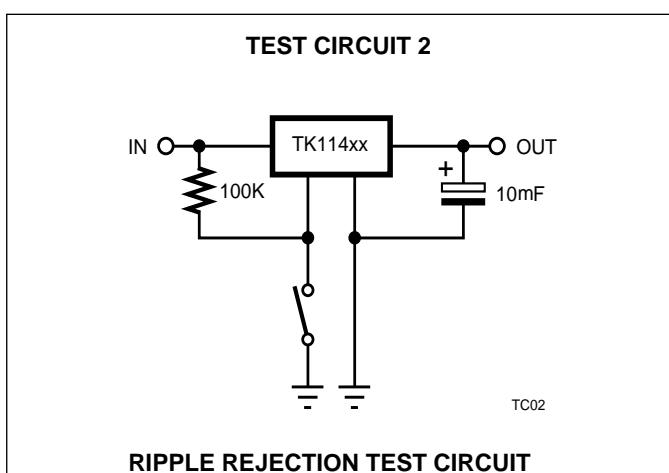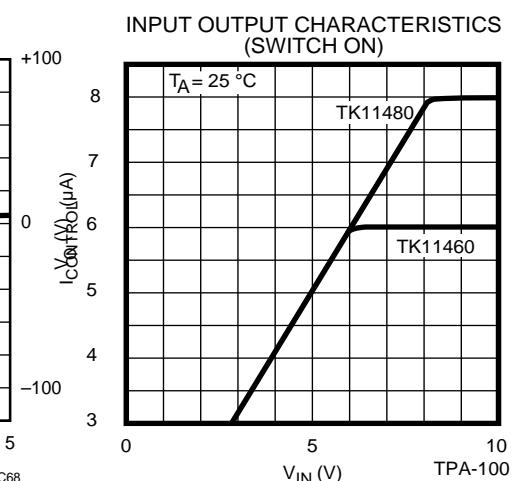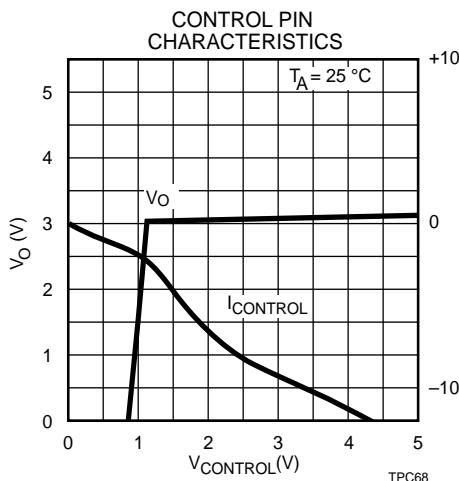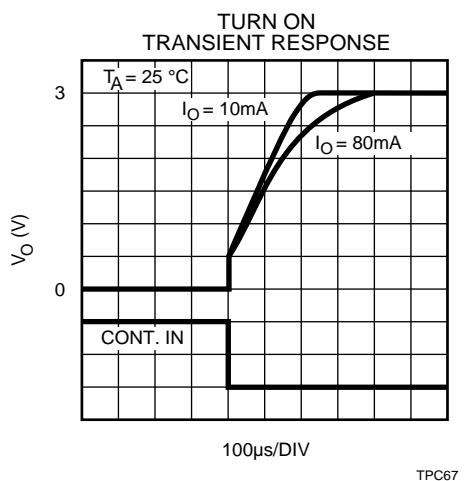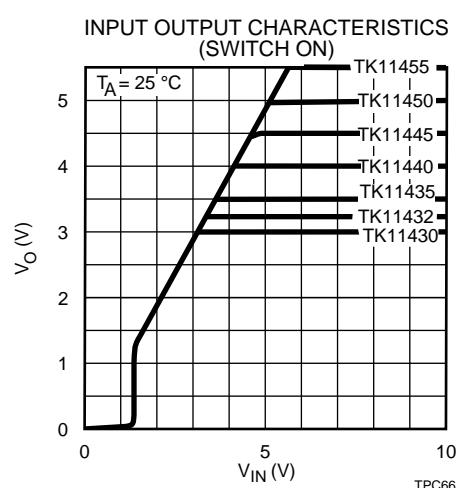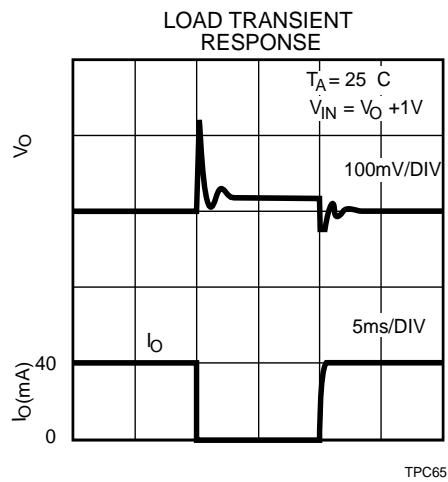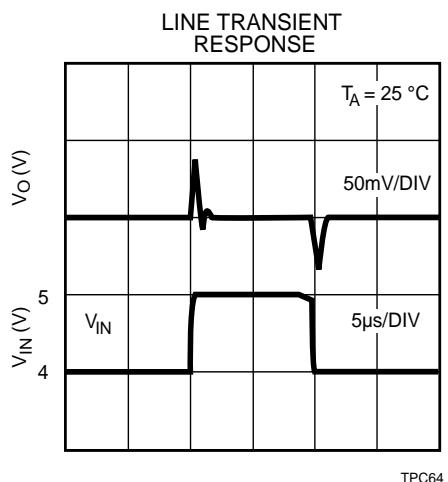


TK114xx

TYPICAL APPLICATIONS

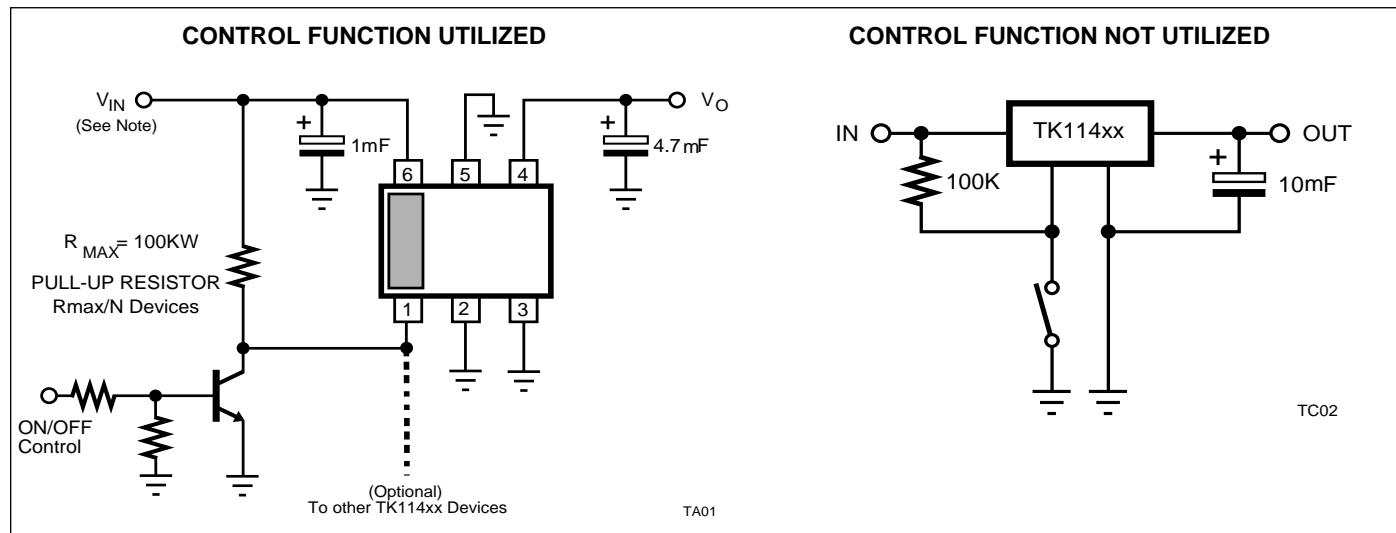

Note: Parallel connection of control pins is allowed if all devices use identical input voltage.

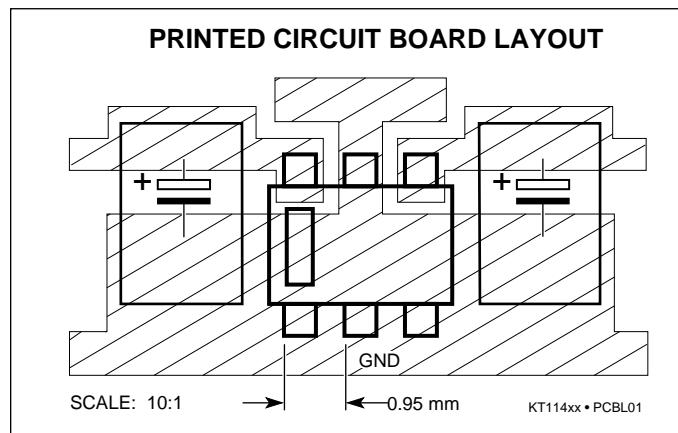

Handling Molded Resin Packages



All plastic molded packages absorb some moisture from the air. If moisture absorption occurs prior to soldering the device into the printed circuit board, increased separation of the lead from the plastic molding may occur, degrading the moisture barrier characteristics of the device. This property of plastic molding compounds should not be overlooked, particularly in the case of very small packages, where the plastic is very thin.

Application Hints

Maximize copper foil area connecting to all IC pins for optimum performance. Place input and output bypass capacitors close to the GND pin. For best transient behavior and lowest output impedance, use as large a capacitor value as possible. The temperature coefficient of the capacitance and Equivalent Series Resistance (ESR) should be taken into account. These parameters can influence power supply noise and ripple rejection. In extreme cases, oscillation may occur. In order to maintain stability, the output bypass capacitor value should be minimum 2.2 μF for a Tantalum electrolytic or 4.7 μF for an Aluminum electrolytic.

In order to preserve the original moisture barrier properties of the package, devices are stored and shipped in moisture proof bags, filled with dry air. The bags should not be opened or damaged prior to the actual use of the devices. If this is unavoidable, the devices should be stored in a low relative humidity environment (40 to 65%) or in an enclosed environment with desiccant.


TYPICAL APPLICATIONS (CONT.)

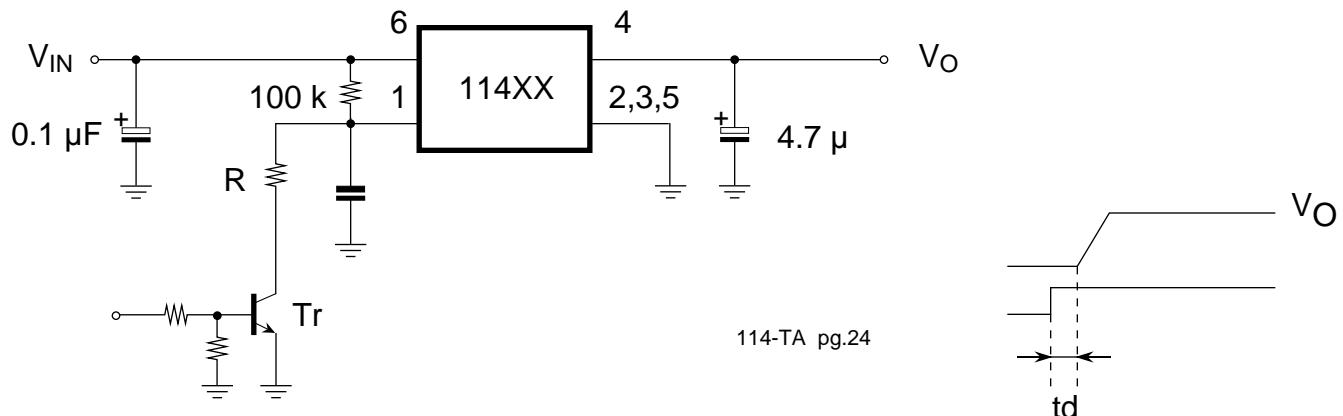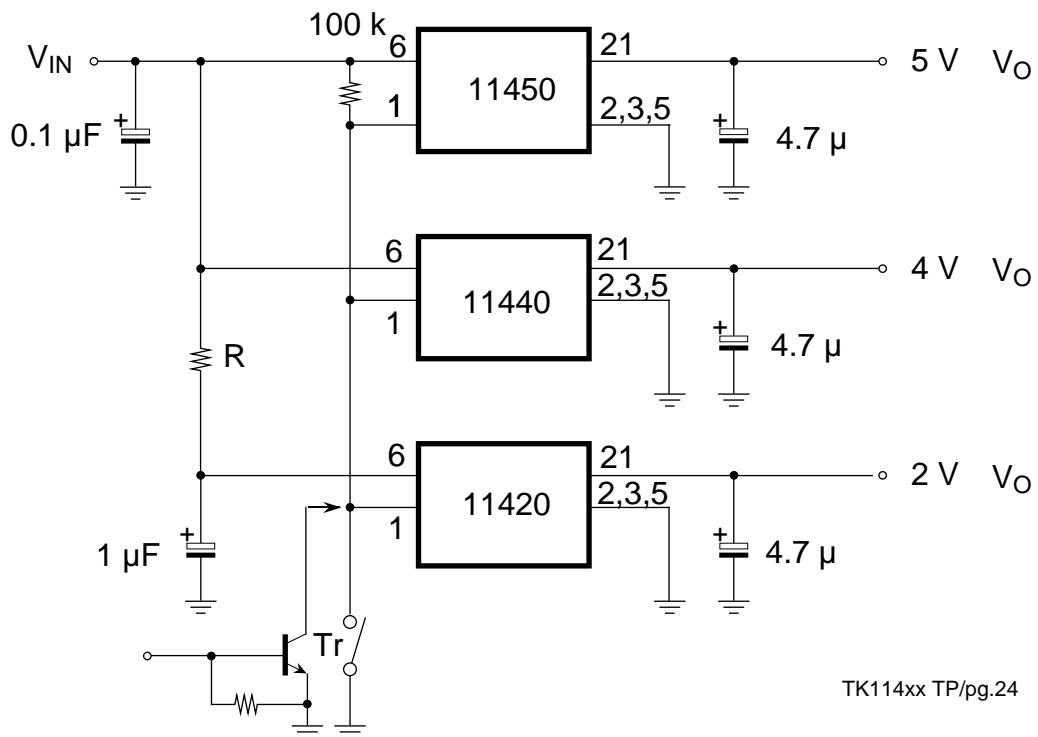

TK114xx

PACKAGE OUTLINE

SOT-23L

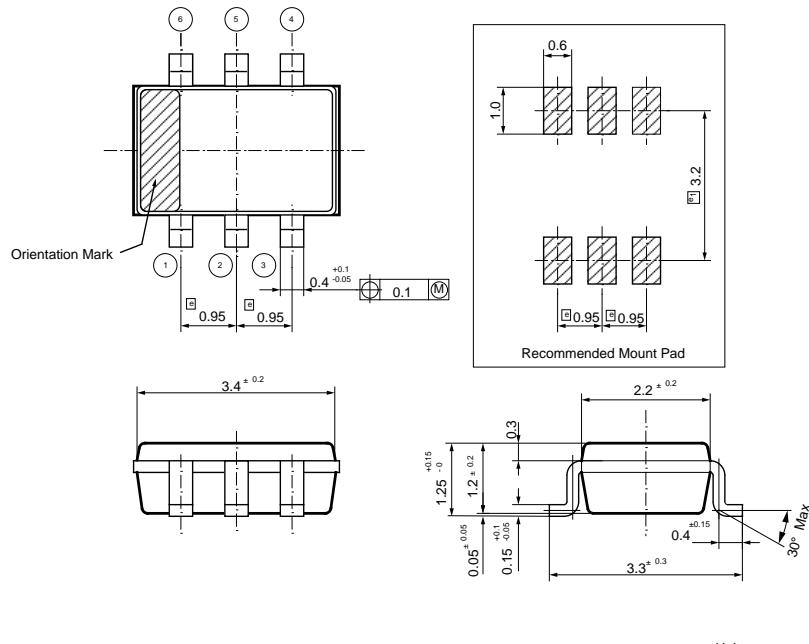

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.



YOUR LOCAL REPRESENTATIVE IS:

TOKO, Inc.
1-17, Higashi-yukigaya 2-chome
Ohta-ku, Tokyo
145 Japan
Tel: (03) 3727-1161
Fax: (03) 3728-4690, 4697