

**Audio Analog Switch****FEATURES**

- Wide Operating Voltage Range (3 to 13 V)
- Low Distortion (typ. 0.004%)
- Wide Dynamic Range (typ. 6 V<sub>P-P</sub>)
- Low Output Impedance (typ. 20 Ω)
- Protection at Output Terminal.



**APPLICATIONS**

- Audio Systems
- Radio Cassettes

**DESCRIPTION**

The TK15210M is an Analog Switch IC that was developed for audio frequency applications. The function of the IC is to select one output from two input channels. The channel selection is controlled by a low level. The TK15210M operates from a single power supply with the input bias built-in ( $V_{CC}/2$ ). Because the distortion is very low, the TK15210M is suitable for various signal switching applications, especially Hi-Fi devices. The TK15210M offers a wide operating voltage range with simple associated circuitry.

The TK15210M is available in the small SOT23L-6 plastic surface mount package.

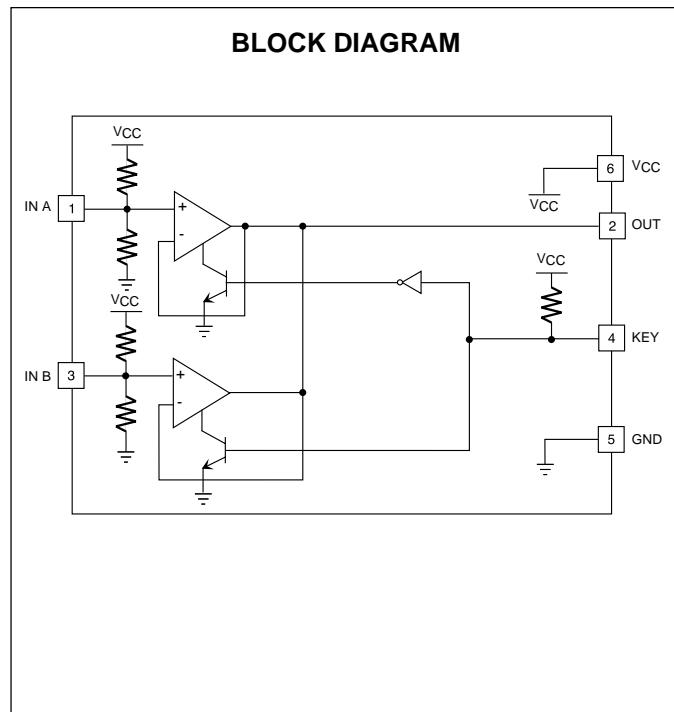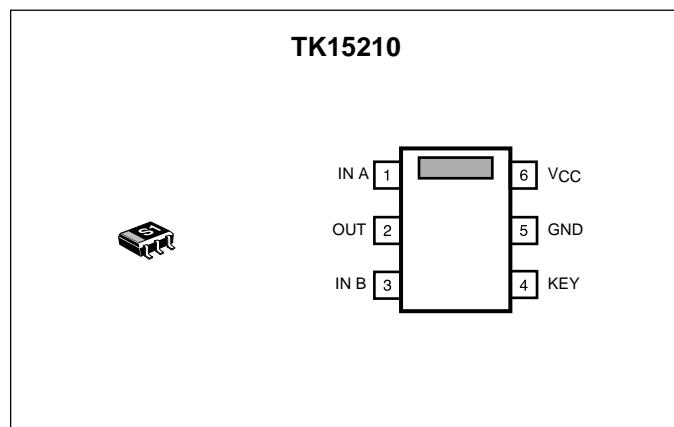**ORDERING INFORMATION**

TK15210M



Tape/Reel Code

TAPE/REEL CODE  
TL: Tape Left

# TK15210

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage	14 V
Operating Voltage Range	3 to 13 V
Power Dissipation (Note 4)	200 mW
Storage Temperature Range	-55 to +150 °C
Operating Temperature Range	-20 to +75 °C
CONTROL SECTION	
Input Voltage	-0.3 V to $V_{CC}$ +0.3 V

## ANALOG SWITCH SECTION


Signal Input Voltage	-0.3 V to $V_{CC}$ +0.3 V
Signal Output Current	3 mA
Maximum Input Frequency	100 kHz
Lead Soldering Temperature	235 °C

## TK15210M ELECTRICAL CHARACTERISTICS

Test conditions:  $V_{CC} = 8.0$  V,  $T_A = 25$  °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$I_{CC}$	Supply Current			2.5	5.0	mA
KEY CONTROL SECTION						
$V_{IL}$	Input Voltage Low Level	Note 1	-0.3		+0.6	V
$V_{IH}$	Input Voltage High Level		2.0		$V_{CC}$ + 0.3	V
$I_{OKEY}$	Outflow Current	Pin 4 connect to GND			30	µA
ANALOG SWITCH SECTION						
THD	Total Harmonic Distortion	$V_{IN} = 1$ Vrms, $f = 1$ kHz		0.004	0.008	%
$N_L$	Residual Noise	Note 2			10	µVrms
CT	Cross Talk	$V_{IN} = 1$ Vrms, $f = 10$ kHz, Note 3		-80	-75	dB
DYN	Maximum Input Signal Level	$f = 1$ kHz, THD = 0.1%	2.0			Vrms
GVA	Voltage Gain	$f = \sim 20$ kHz		0		dB
$V_{cent}$	Input-Output Terminal Voltage	$V_{CC}$ / 2 output	3.8	4.0	4.2	V
$\Delta V_{cent}$	Output Terminal Voltage Difference				18	mV
$Z_{IN}$	Input Impedance	DC Impedance		36		kΩ
$Z_{OUT}$	Output Impedance	DC Impedance		20		Ω

Note 1: The KEY input equivalent circuit is shown to the right. When the control pin is open, the input is pulled up to a high level (approximately 1.4 V). This applies the channel A input signal to the output. A low level changes the output to the channel B input signal.




Note 2: This value measured with a capacitor connected between the input terminal and ground. See Figure 7.

Note 3: This value measured with a 5 kΩ resistor and series capacitor connected between the input terminal and ground. See Figure 8.

Note 4: Power dissipation is 200 mW when mounted as recommended. Derate at 1.6 mW/°C for operation above 25 °C.

## TEST CIRCUITS AND METHODS

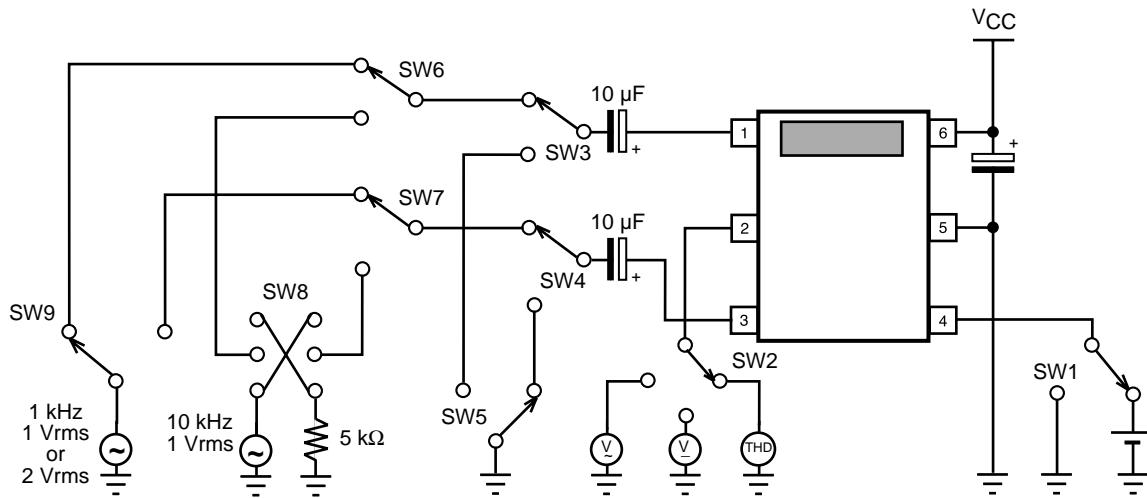


- 1: The above condition rate Ach and dynamic range measurement for channel A.
- 2: SW5 is for residual noise measurement.
- 3: SW8 is for cross talk measurement.

## SUPPLY CURRENT (FIGURE 1)

This current is a consumption current with a nonloading condition.

- 1) Measure the inflow current to Pin 6 from  $V_{cc}$ . This current is the supply current.

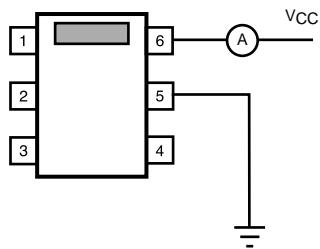


**Figure 1**

## CONTROL LOW/HIGH LEVEL (FIGURE 2)

This level is to measure the threshold level.

- 1) Input, the  $V_{cc}$  to Pin 6. (This condition is the same with the other measurements, omitted from the next for simplicity.)
- 2) Input to Pin 1 with sine wave (1 kHz, 1 Vrms).
- 3) Connect an oscilloscope to Pin 2.
- 4) Elevate the Pin 4 voltage from 0 V gradually, until the sine wave appears at the oscilloscope. This voltage is the threshold level when the wave appears.

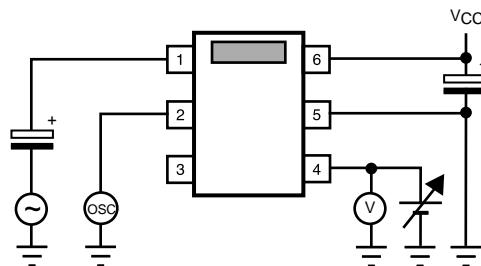


**Figure 2**

### KEY INPUT CURRENT (FIGURE 3)

This current means the outflow current with the control.

- 1) Measure the current to GND from Pin 4. This current is the outflow current.

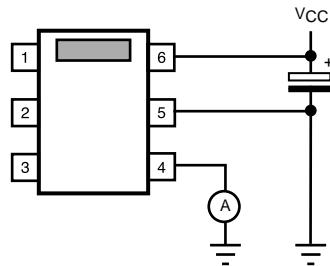

**Figure 3**

## TEST CIRCUITS AND METHODS (CONT.)

### TOTAL HARMONIC DISTORTION (FIGURE 4)

Use the lower distortion oscillator for this measurement because the distortion of the TK15210 is very low.

- 1) Pin 4 is in the open condition, or high level.
- 2) Connect a distortion analyzer to Pin 2.
- 3) Input the sine wave (1 kHz, 1 Vrms) to Pin 1.
- 4) Measure the distortion of Pin 2. This value is the distortion of Ach.
- 5) Next connect Pin 4 to the GND, or low level.
- 6) Input the same sine wave to Pin 3.
- 7) Measure in the same way. This value is the distortion of Bch.

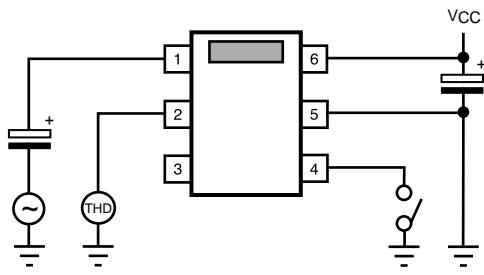


Figure 4

### VOLTAGE GAIN (FIGURE 5)

This is the output level against the input level.

- 1) Pin 4 is in the open condition, or high level.
- 2) Connect AC volt meters to Pin 1 and Pin 3. (Using the same type meter is best)
- 3) Input a sine wave (1 kHz) to Pin 1 (f = optional up to max. 20 kHz, 1 Vrms).
- 4) Measure the level of Pin 1 and name this V1.
- 5) Measure the level of Pin 2 and name this V2.
- 6) Calculate Gain =  $20 \log ((|V2 - V1|)/V1)$   
 $V1 < V2 = + \text{Gain}$ ,  $V1 > V2 = - \text{Gain}$   
 This value is the voltage gain of Ach.
- 7) Next, connect Pin 4 to the GND, or low level.
- 8) Input the same sine wave to Pin 3.
- 9) Measure and calculate in the same way.  
 This value is the voltage gain of Bch.

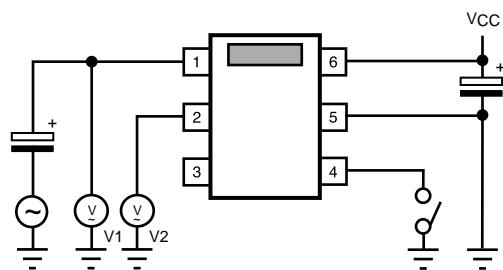


Figure 5

### MAXIMUM INPUT LEVEL (FIGURE 6)

This measurement measures at the output side.

- 1) Pin 4 is the open condition, or high level.
- 2) Connect a distortion analyzer and an AC volt meter to Pin 2.
- 3) Input a sine wave (1 kHz) to Pin 1 and elevate the voltage from 0 V gradually until the distortion gets to 0.1% at Pin 2.
- 4) When the distortion amounts to 0.1%, stop elevating and measure the AC level of Pin 2.  
 This value is the maximum input level of Ach.
- 5) Next, connect Pin 4 to the GND, or low level.
- 6) Input the same sine wave to Pin 3.
- 7) Measure in the same way.  
 This value is the maximum input level of Bch.

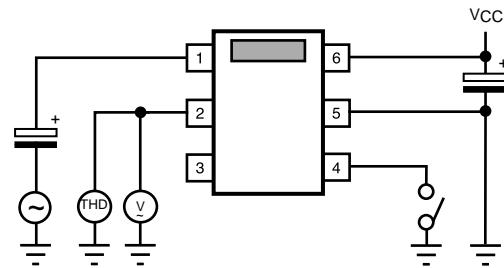


Figure 6

## TEST CIRCUITS AND METHODS (CONT.)

### RESIDUAL NOISE (FIGURE 7)

This value is not a S/N ratio. This is a noise which occurs from the device itself.

- 1) Pin 4 is in the open condition, or high level.
- 2) Connect an AC volt meter to Pin 2.
- 3) Connect a capacitor to GND from Pin 1.
- 4) Measure the AC voltage of Pin 2. This value is the noise of Ach. If the influence of noise from outside exists, use optional filters.
- 5) Next, connect Pin 4 to the GND, or low level.
- 6) Remove the capacitor of Pin 1 and connect the capacitor to Pin 3.
- 7) Measure in the same way.

This value is the noise level of Bch.

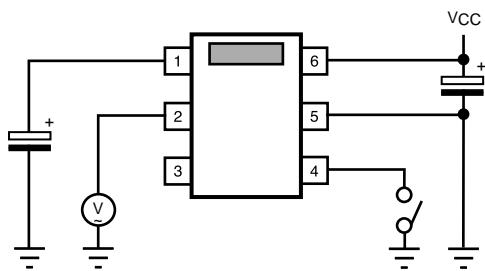


Figure 7

### CROSS TALK (FIGURE 8)

This is the cross talk between Ach and Bch.

- 1) Pin 4 is in the open condition, or high level.
- 2) Connect AC volt meters to Pin 2 and Pin 3.
- 3) Connect a capacitor and a resistance in series to GND from Pin 1.
- 4) Input sine wave (10 kHz, 1 Vrms) to Pin 3.
- 5) Measure the level of Pin 3 and name this V3.
- 6) Measure the level of Pin 2 and name this V4.
- 7) Calculate:

$$\text{Cross Talk} = 20 \log (V4 / V3)$$

This value is the cross talk to Ach from Bch.

- 8) Next, connect Pin 4 to the GND, or low level.
- 9) Change line of Pin 1 and Pin 3.
- 10) Input the same sine wave to Pin 1.
- 11) Measure and calculate in the same way.

This value is the isolation to Bch from Ach.

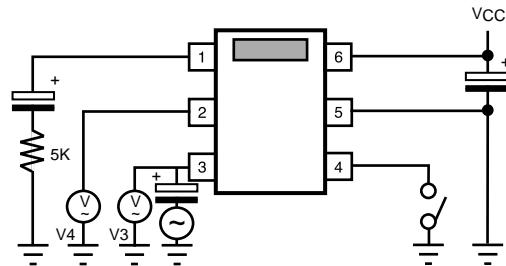


Figure 8

### I/O TERMINAL VOLTAGE (FIGURE 9)

This is the DC voltage of input and output.

Because the input and the output are nearly equal, only the output is measured.

- 1) Pin 4 is in the open condition, or high level.
- 2) Connect a DC voltmeter to Pin 2 and measure. This value is the terminal voltage of Ach.
- 3) Next, connect Pin 4 to the GND, or low level.
- 4) Measure in the same way. This value is the terminal voltage of Bch.

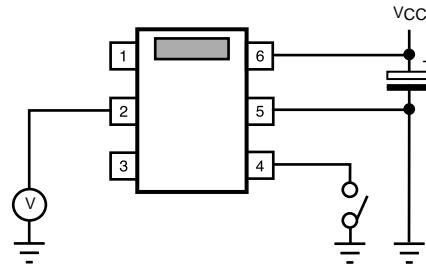


Figure 9

### OUTPUT TERMINAL DIFFERENCE







This is the DC output voltage difference between Ach and Bch. This is calculated by using values measured at the I/O Terminal Voltage.



$$\Delta V_{\text{cent}} = |(\text{Ach DC output value}) - (\text{Bch DC output value})|$$

This value is the voltage difference.

## TYPICAL PERFORMANCE CHARACTERISTICS

$V_{CC} = 8 \text{ V}$ ,  $T_A = 25 \text{ }^\circ\text{C}$ , unless otherwise specified.

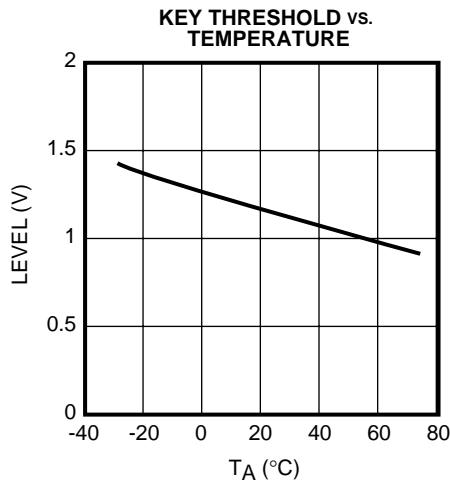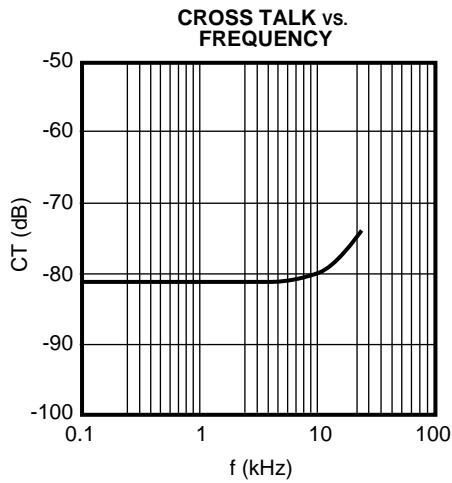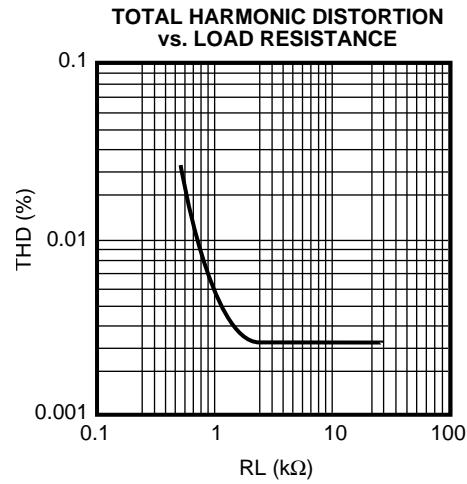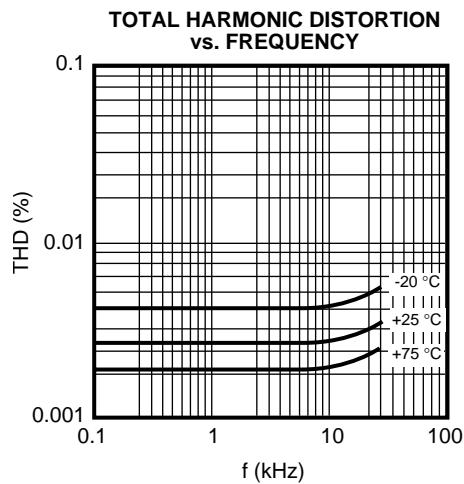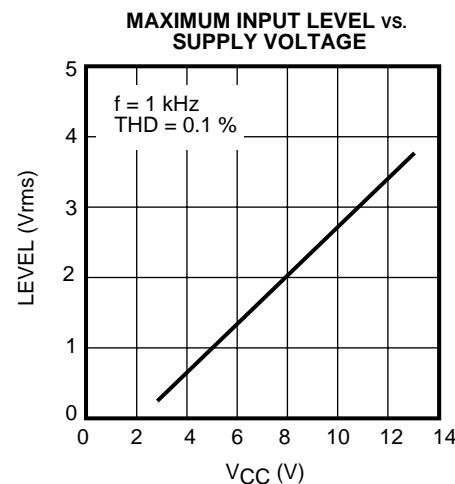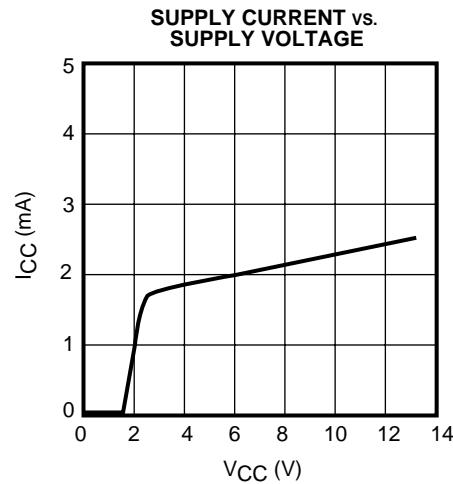

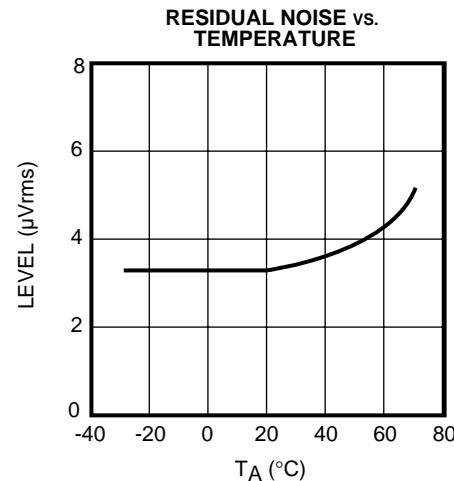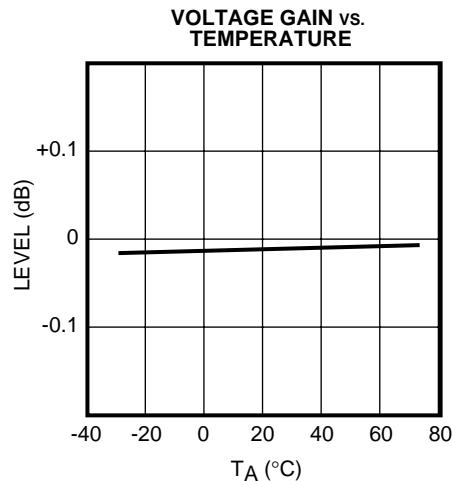**TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)** $V_{CC} = 8$  V,  $T_A = 25$  °C, unless otherwise specified.

TK15210

## TERMINAL VOLTAGE AND CIRCUIT

Condition:  $V_{cc} = 8$  V.

## APPLICATION INFORMATION

### KEY INPUT CIRCUIT

Figure 10 illustrates the KEY input equivalent circuit. When the control pin is open, the input is pulled up to a high level (approximately 1.4 V). This applies the channel B input signal. When the control terminal is pulled low, a current up to 30  $\mu$ A may flow out of the terminal. For this reason, an external resistor value must be selected which results in a voltage of less than 0.8 V to maintain a low condition.

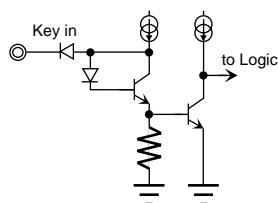


Figure 10

### SWITCHING TIME

The time is a signal change reply time compared to the control key input signal. Figure 11 illustrates the timing chart.  $T = 2 \mu$ s typically.




Figure 11

### APPLICATION

Figure 12 illustrates an example of a typical application. The standard application is to use capacitor coupling at the inputs and output of the TK15210M. For characteristics of distortion and dynamic range versus  $R_L$ , refer to the graphs in the Typical Performance Characteristics. The TK15210M can also be used with direct coupling, but the characteristics will get worse (distortion, etc.). If direct coupling is desired, then it is recommended to use external circuitry that is biased compatible with the TK15210M.

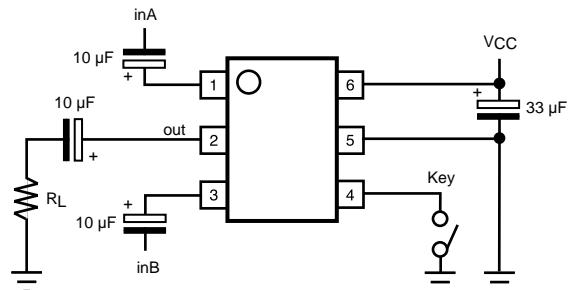


Figure 12

### CROSS TALK

Figure 13 is an example of a layout pattern. In the application of the TK15210M, the following must be considered. Because of the high impedance at the inputs, the capacitors can act as antennas to each other. If the parts are bigger, and the space between the capacitors is too narrow, then cross talk will increase. Therefore, when designing the printed circuit pattern, separate the input capacitors as far as possible and use as small a part as possible (e.g., surface mount types, etc.).

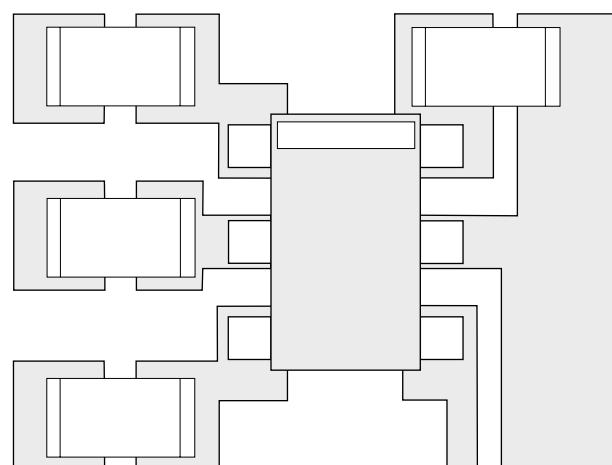


Figure 13

## APPLICATION INFORMATION (CONT.)

### OUTPUT TERMINAL VOLTAGE DIFFERENCE

This parameter is the output voltage difference between Ach and Bch, and appears when the channel changes from Ach to Bch, or changed to the reverse. Generally, this is called Switching Noise or Pop Noise. If this value is big and if this noise is amplified by the final amplifier and is outputted by the speakers, then it appears as a Shock Sound. The output terminal voltage difference of the TK15210M is a value that adds the internal bias difference and the off-set voltage difference. The value of the TK15210 is very small; its maximum value is 18 mV. Toko can offer the "Muting IC" if users wish to mute Switching Noise.

### DIRECT TOUCH

The signal input terminals:

Internal circuits are operated by constant current circuit; even if  $V_{CC}$  or GND is contacted, damage does not occur.

The signal output terminal:

As for inflow, internal circuits are operated by constant current circuit; even if  $V_{CC}$  is contacted, damage does not occur. Outflow is protected by the circuit. Even if the terminal is contacted to GND, damage does not happen. Package damage may occur due to heat. Pay attention to long time contact.

Do not supply over the maximum rating.

Referenced to GND, do not provide terminal voltages over  $V_{CC}$  +0.3 V or -0.3 V.





### DC SIGNAL INPUT

The output of the TK15210M has a saturation voltage (both  $V_{CC}$  and GND sides of approximately 1.0 V); accordingly the use of a DC signal is not recommended (e.g., pulse signal, etc.).

**NOTES**

## PACKAGE OUTLINE

### SOT23L-6

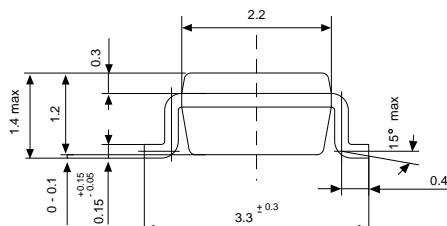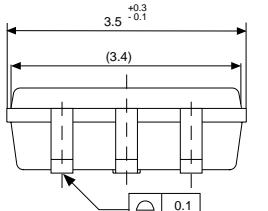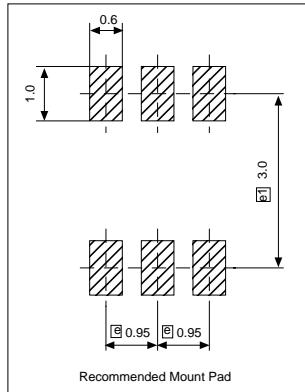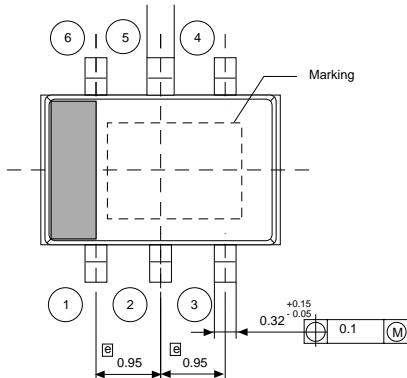

### Marking Information

TK15210M

S1



Toko America, Inc. Headquarters  
1250 Feehanville Drive, Mount Prospect, Illinois 60056  
Tel: (847) 297-0070 Fax: (847) 699-7864

### TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office  
Toko America, Inc.  
1250 Feehanville Drive  
Mount Prospect, IL 60056  
Tel: (847) 297-0070  
Fax: (847) 699-7864

Western Regional Office  
Toko America, Inc.  
2480 North First Street, Suite 260  
San Jose, CA 95131  
Tel: (408) 432-8281  
Fax: (408) 943-9790

Eastern Regional Office  
Toko America, Inc.  
107 Mill Plain Road  
Danbury, CT 06811  
Tel: (203) 748-6871  
Fax: (203) 797-1223

Semiconductor Technical Support  
Toko Design Center  
4755 Forge Road  
Colorado Springs, CO 80907  
Tel: (719) 528-2200  
Fax: (719) 528-2375

Visit our Internet site at <http://www.tokoam.com>

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.