




- **Measuring range:** 0...100 %rh, -30 ... +85 °C
- **Accuracy:** ± 2 %rh, $\pm 0,2$ °C
- **Output signal:** 4 ... 20mA (2 wire), Pt100 Ω 1/3 DIN
- **Power supply:** 9 ... 33VDC
- **Protection degree:** IP65
- **Interchangeable sensor module S6000**
- **Linearised and temperature compensated humidity measurement**
- **Capacitive thin film humidity sensor**
- **Sensor response time:** < 10 seconds
- **CE conformity**

The T232 series relative humidity probe is equipped with the calibrated and fully interchangeable sensor module HUMICOR S6000, presenting an innovative element in humidity measurement.


Maintenance cost is therefore drastically reduced and machine downtime is minimised.

DIMENSIONS

	Humidity	Temperature
Connections	2 wire	2 wire
Accuracy @ 23 °C	Hysteresis non-linearity included ± 2 %rh (5...95 %rh) ± 2,5 %rh (< 5 %rh, > 95 %rh)	Pt100 Ω 1/3 DIN direct: ± 0,2 °C Current output: ±0,3 °C
Measuring range	0 ... 100 %rh	-30 ... +85 °C
Sensor response time	(90% of scale for a step change from 11% to 75 %rh)	/
Output signal	< 10 sec 4...20mA	4...20mA Pt100 Ω direct 1/3 DIN (3 wire)
Temperature range	/	-30...+70 °C, 0...100 °C
Power supply: E	9...33 VDC	
Impedence: R	$R < ((E - 9) / 0,02) \Omega$	
Consumption	20mA max.	
Operating range		
Probe	0 ... 100 %rh	-30 ... +85 °C
Housing	0 ... 100 %rh	-30 ... +70 °C
Storage	0 ... 100 %rh	-40 ... +70 °C
Housing		
Dimension	98*64*38	
Material	ABS	
Weight	180 g (DELTRIN), 1,1 Kg (STAINLESS STEEL)	
Probe		
Dimension	ø 22mm, L = 250 or 500mm	
Material	DELTRIN or STAINLESS STEEL	
Protection degree	IP65	
Electrical connections	Screw terminal, tightening capacity 1,5 mm² max.	

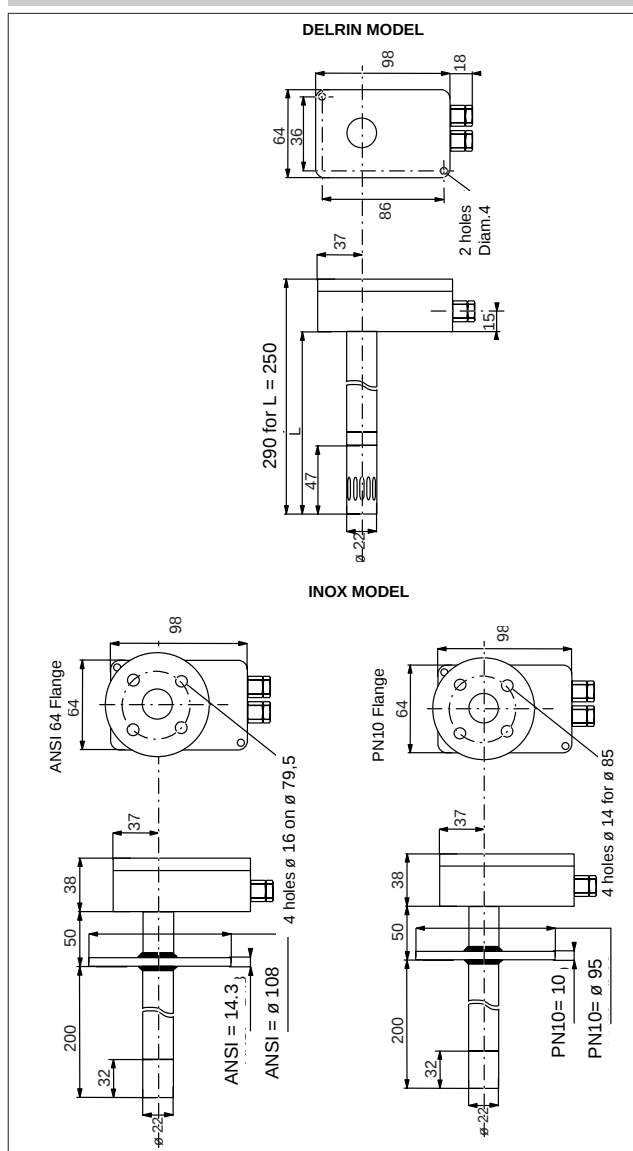

ELECTRICAL CONNECTION

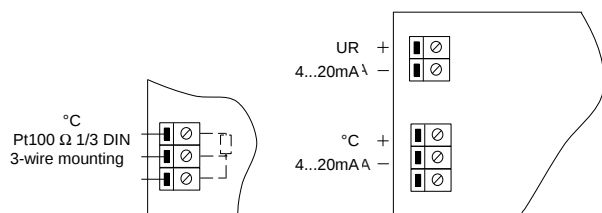

MEASURING RANGE


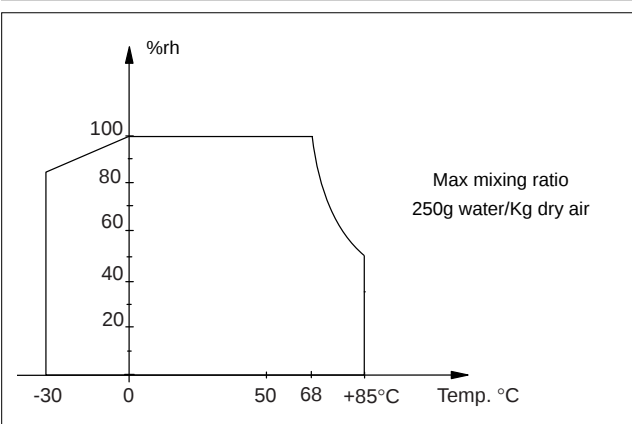


DIAGRAM OF MAXIMUM CHARGE

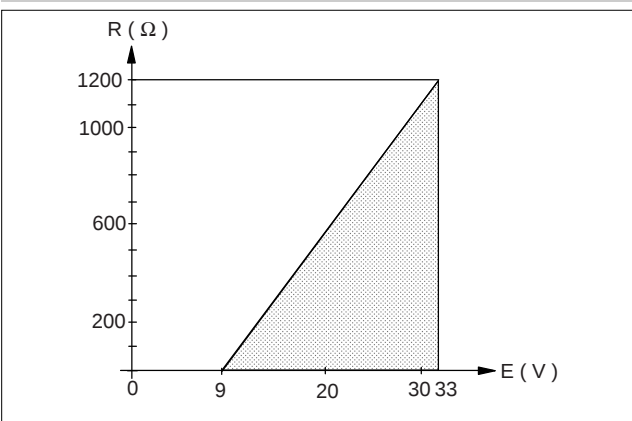

ACCESSORIES

Control kit HKC:

You can check your hygrometer with the control kit HKC which is based on the principle of non-saturated salt solutions.


Refer to technical data sheet 85521

Interchangeable sensor module S6000:

S6000 with Pt100 Ω output: Ref. 6A03130

S6000 without Pt100 Ω output: Ref. 6A08840

REMOVING THE S6000

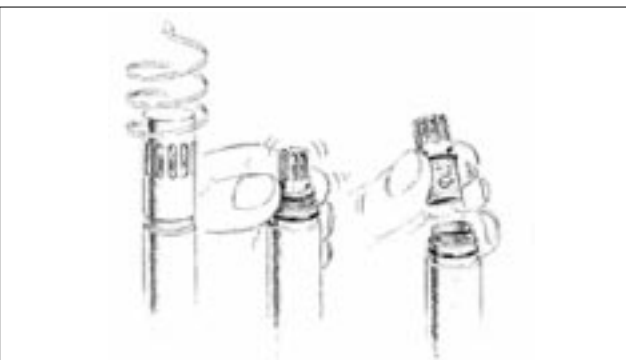

ORDERING CODE

		T2	3	2					
Output signal		2 fils, 4 ... 20mA		3					
Model		Duct		2					
Temperature range		No temperature		0					
		Pt100 direct (Standard)		1					
		Range 0 ... 100 °C		2					
		Range -30...70°C		3					
Power supply (Model 2 wire)		9...33 VDC		0					
Probe		DELIN 250mm, D22mm		0					
		Stainless Steel 250mm, D22mm		1					
		Stainless Steel 500mm, D22mm		2					
For Stainless Steel models		No flange		0					
		Flange PN10 DN15		1					
		Flange ASA 150 LB. 1 Pouce		2					
Protection cap / filter		Slotted cap DELIN, white (standard) with DELIN probe		A					
		Slotted cap DELIN, black		B					
		Slotted cap DELIN, white with polyethylene filter		C					
		Slotted cap DELIN, black with polyethylene filter		D					
		Slotted cap PVDF, white		E					
		Slotted cap PVDF, white, with teflon filter		F					
		Wire mesh filter, stainless steel		G					
		Sinter filter, stainless steel standard with s. s. probe (*)		H					
		Sinter filter, stainless steel, teflon coated (*)		I					

(*) A knurled nut, ref. 1A04640, is necessary to fix these filter types

Example: T232.3011H

Relative humidity transmitter T230, duct mounting version, stainless steel probe with sinter filter and flange, output signal humidity 4...20mA, temperature 4...20mA (-30...+70 °C), power supply 9...33 VDC.

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice



LEADER Electronic Co., Ltd

116, Jianghuali, Jianghua Road, Jiangmen City, GD, PRC

Tel: + 86 750 3101711, 3379183

Fax: + 86 750 3388669

Website: www.leadersensors.com

E-mail: leader@leadersensors.com



code 85536 -05/00