

LOW POWER, BAND-GAP VOLTAGE REFERENCES
FEATURES

- Temperature Coefficient 50ppm/ $^{\circ}\text{C}$
- Wide Operating Current Range
 - TC04 15 μA to 20mA
 - TC05 20 μA to 20mA
- Dynamic Impedance 1 Ω
- Output Tolerance Typ. 2%
- Output Voltage Option
 - TC04 1.25V
 - TC05 2.5V
- TO-92 Plastic Package
- 8-Pin Plastic Narrow Body SOIC Package


APPLICATIONS

- ADC and DAC Reference
- Current Source Generation
- Threshold Detectors
- Power Supplies
- Multimeters

GENERAL DESCRIPTION

The TC04 (1.25V output) and TC05 (2.5V output) bipolar, two-terminal, band-gap voltage references offer precision performance without premium price. These devices do not require thin-film resistors, greatly lowering manufacturing complexity and cost.

A 50ppm/ $^{\circ}\text{C}$ output temperature coefficient and 15 μA to 20mA operating current range make these devices attractive for multimeter, data acquisition converter, and telecommunication voltage references.

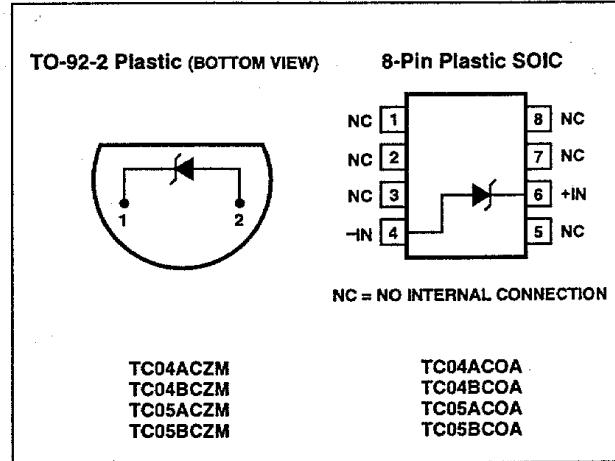PIN CONFIGURATIONS

ORDERING INFORMATION

Part No.	Package	Temperature Range	Voltage	Max. Temperature Coefficient
TC04ACOA	8-Pin SOIC	0°C to +70°C	1.25V	50ppm/ $^{\circ}\text{C}$
TC04ACZM	TO-92-2	0°C to +70°C	1.25V	50ppm/ $^{\circ}\text{C}$
TC04BCOA	8-Pin SOIC	0°C to +70°C	1.25V	100ppm/ $^{\circ}\text{C}$
TC04BCZM	TO-92-2	0°C to +70°C	1.25V	100ppm/ $^{\circ}\text{C}$
TC05ACOA	8-Pin SOIC	0°C to +70°C	2.5V	50ppm/ $^{\circ}\text{C}$
TC05ACZM	TO-92-2	0°C to +70°C	2.5V	50ppm/ $^{\circ}\text{C}$
TC05BCOA	8-Pin SOIC	0°C to +70°C	2.5V	100ppm/ $^{\circ}\text{C}$
TC05BCZM	TO-92-2	0°C to +70°C	2.5V	100ppm/ $^{\circ}\text{C}$

**TC04A TC04B
TC05A TC05B**

LOW POWER, BAND-GAP VOLTAGE REFERENCES

ABSOLUTE MAXIMUM RATINGS*

Forward Current	+10mA
Reverse Current	+30mA
Storage Temperature Range	-65°C to +150°C
Operating Temperature Range	
TO-92 Package	0°C to +70°C
Surface Mount Package	0°C to +70°C

Lead Temperature (Soldering, 10 sec)	
TO-92 Package	+300°C
Surface Mount Package	+300°C
Power Dissipation	Limited by Forward/ Reverse Current

*Functional operation above the absolute maximum stress ratings is not implied.


ELECTRICAL CHARACTERISTICS: $T_A = +25^\circ\text{C}$, unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_{BR}	Reverse Breakdown Voltage: TC04 TC05	$I_R = 100\mu\text{A}$	1.24 2.45	1.26 2.50	1.28 2.60	V
DV_{BR}	Reverse Breakdown Voltage Change: TC04 TC05	15μA < I_R < 20mA 20μA < I_R < 1mA 20μA < I_R < 20mA 25μA < I_R < 1mA	— — — —	10 0.25 10 0.25	20 1 20 1	mV
TC	Temperature Coefficient: TC04A/TC05A TC04B/TC05B	$I_R = 100\mu\text{A}$	— —	0.003 0.003	0.005 0.01	%/°C
I_R	Reverse Current: TC04 TC05		0.015 0.020	— —	20 20	mA


**TC04A TC04B
TC05A TC05B**

LOW POWER, BAND-GAP VOLTAGE REFERENCES

TYPICAL APPLICATIONS

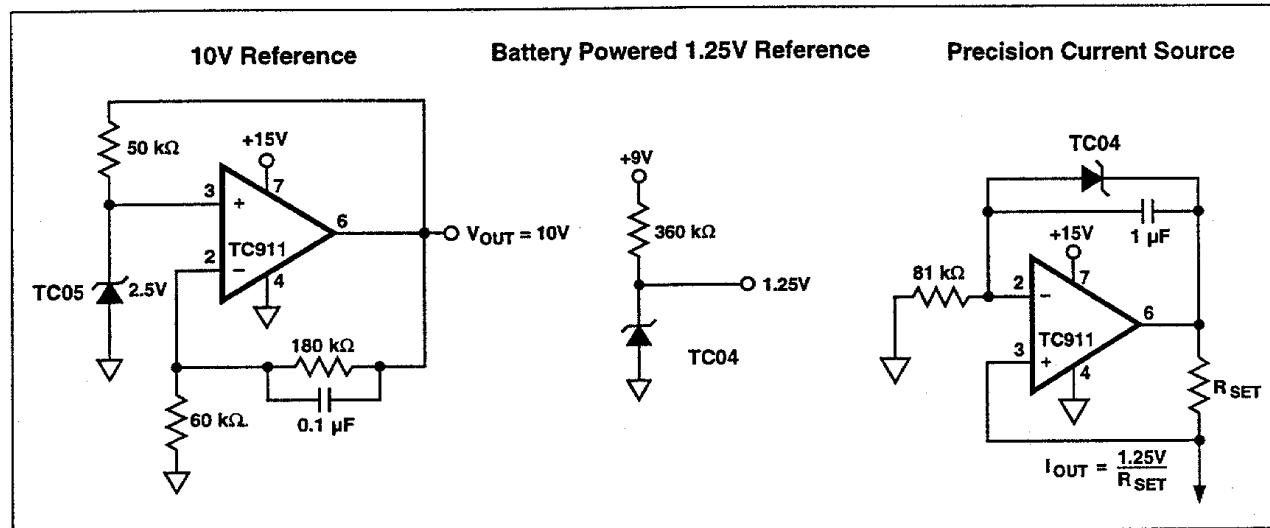

RESPONSE TIME TEST CIRCUIT








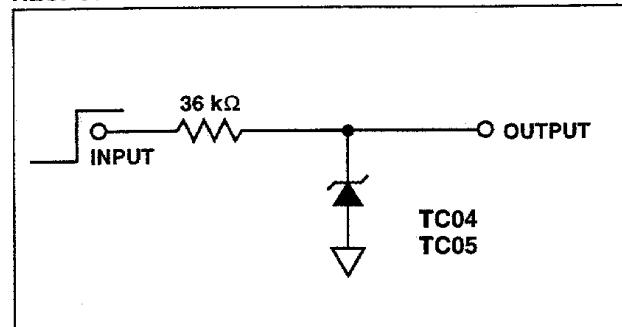


TC04A TC04B

TC05A TC05B

LOW POWER, BAND-GAP VOLTAGE REFERENCES


TYPICAL CHARACTERISTICS

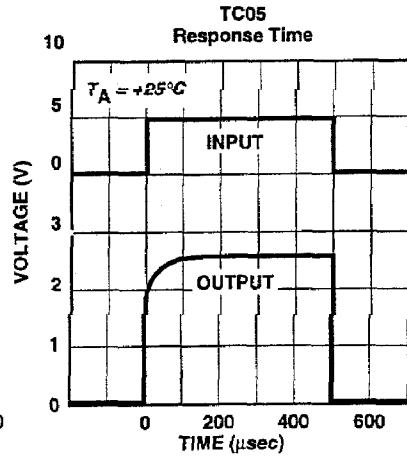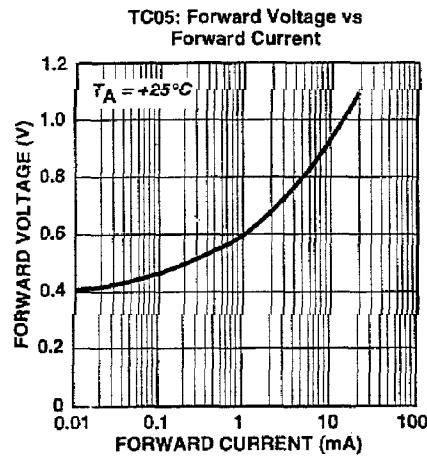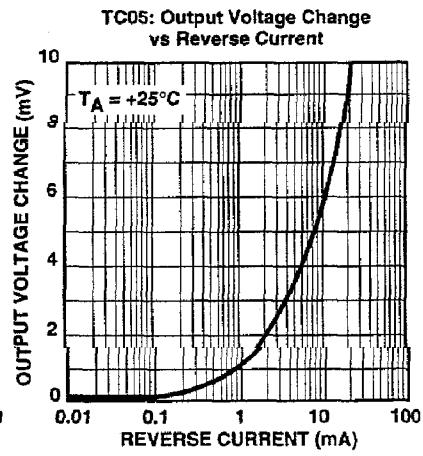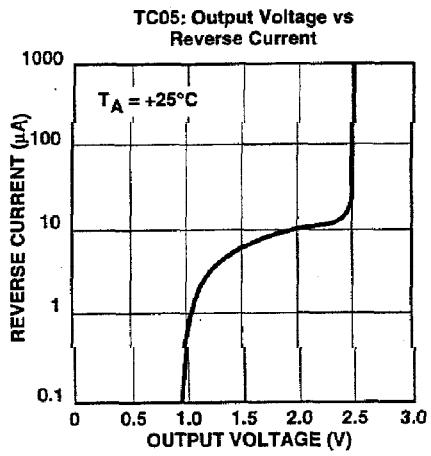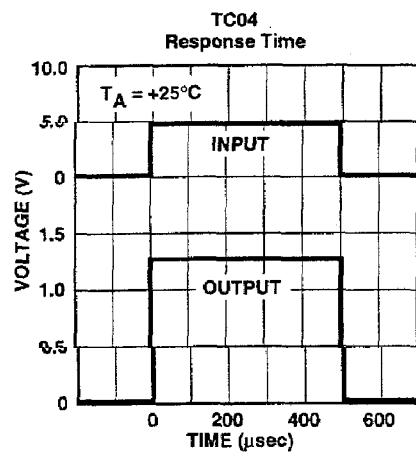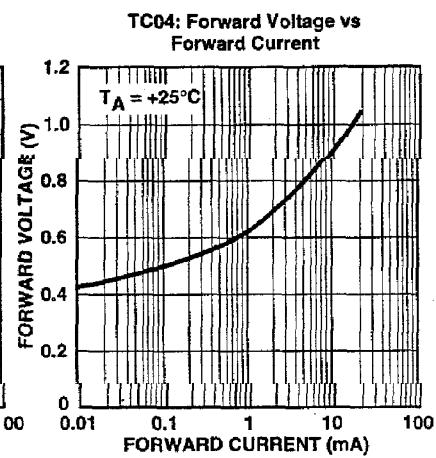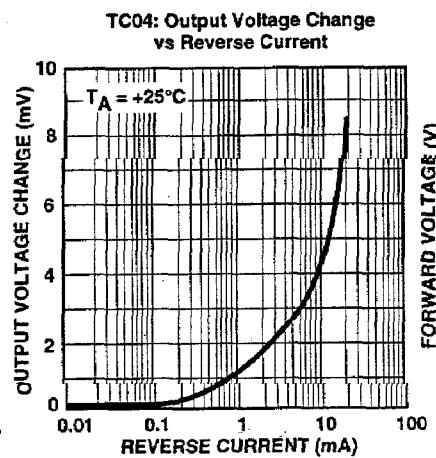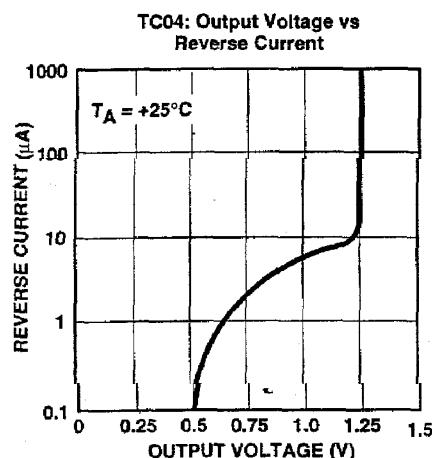

**TC04A TC04B
TC05A TC05B**

LOW POWER, BAND-GAP VOLTAGE REFERENCES

PACKAGE DIMENSIONS

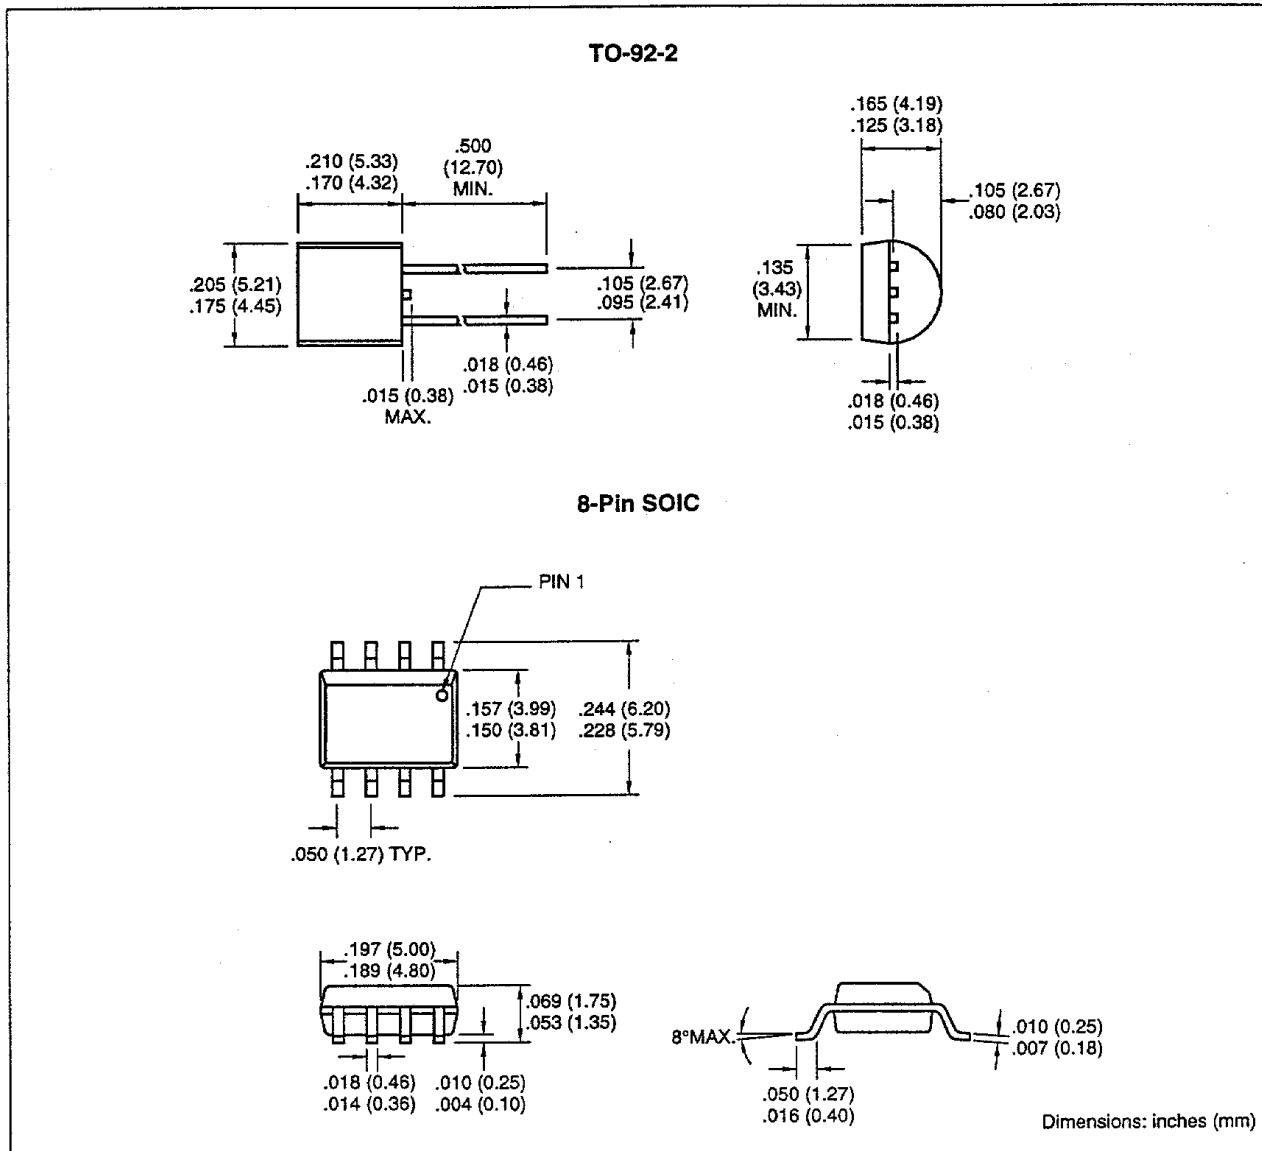

**TC04A TC04B
TC05A TC05B**

LOW POWER, BAND-GAP VOLTAGE REFERENCES

LIFE SUPPORT USAGE POLICY:

GMT's products are not authorized for use as critical components in life support devices or systems without the express written approval of the CEO of GMT. As used herein:

- (a) Life support devices or systems are devices or systems which (1) are intended for surgical implant into the body; or (2) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user; and
- (b) A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system.

Corporate Headquarters
GMT Microelectronics Corporation
950 Rittenhouse Road
Norristown, PA 19403
Toll Free: (888) GMT-4771
 (610) 666-7950
Fax: (610) 666-2729

Email: marketing@gmtme.com
Website: www.gmtme.com

Sales Offices

GMT Microelectronics 1735 North First Street Suite 302A San Jose, CA 95112 (408) 487-9050 Fax (408) 487-9051	GMT Microelectronics 25251 Paseo De Alicia Suite 200 Laguna Hills, CA 92653 (714) 699-3462 Fax (714) 699-3463	GMT Microelectronics 17218 Preston Road Suite 400 Dallas, TX 75287 (972) 735-3155 Fax (972) 735-3156	GMT Microelectronics 14502 North Dale Mabry Suite 200 Tampa, FL 33618 (813) 908-9544 Fax (813) 908-7683	Amurtron Corp. 8FL-2, No. 171 Sung Teh Rd. Taipei, Taiwan R.O.C. (886) 2-23461381 Fax (886) 2-23461382
--	---	--	---	--