



Filter Specification

TFS 280 A - 1/4

Measurement condition

Ambient temperature: 23 °C
 Input power level: 0 dBm
 Terminating impedances
 for input: 605 Ω // -1.1 pF
 for output: 605 Ω // -1.1 pF

Construction and pin configuration

see page 2

Characteristics

Remark:

Reference level for the relative attenuation a_{rel} of the TFS 280 A is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_0 is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The nominal frequency f_N is fixed on 280,455 MHz without tolerance. The given values for the relative attenuation a_{rel} and for the group delay ripple have to be reached at the frequencies given below also if the centre frequency f_0 is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_0 .

D a t a		typ. value		tolerance/limit		
Insertion loss (Reference level)	$a_e = a_{min}$	-		max.	5	dB
Nominal frequency	f_N	-		280,455		MHz
Guaranteed 3 dB signal band width	BW	165	kHz	min.	70	kHz
Relative attenuation $f_N \pm 35$ kHz	a_{rel}	-		max.	3	dB
$f_N \pm 200$ kHz		-		min.	10dB	
$f_N \pm 420$ kHz		-		min.	55dB	
Ultimate rejection		63	dB			
Group delay ripple $f_N \pm 35$ kHz	GD	-		max.	2	μ s
Intermodulation Input IP-3 ($f_N \pm 25$ kHz and $f_N \pm 50$ kHz each of -20 dBm)		-		min.	+ 15dBm	
Operating temperature range		- 20 °C ... + 85 °C				
Storage temperature range		- 40 °C ... + 85 °C				
Temperature coefficient of frequency	TC	ca. - 0.036 ppm/K ²				
Frequency inversion temperature		+ 30 °C				

Generated:

Checked / approved:



www.vectron.com

USA: Vectron International • 166 Glover Avenue, Norwalk, CT 06856 • Tel: 1-888-VECTRON-1 • Fax: 1-888-FAX-VECTRON
 EUROPE: In Denmark, Finland, Ireland, Italy, Israel, Norway, Spain, UK: Tel: 44(0) 1703 766 288 • Fax: 44 (0) 1703 766 822
 In Austria, Belgium, France, Germany, Luxembourg, Netherlands, Sweden, Switzerland: Tel: 49 (0) 72 63 648 0 • Fax: 49(0) 72 63 125
 ASIA: In China, Taiwan, Japan: Tel: 1-603-598-0075 • In Korea, Singapore, Australia, India: Tel: 1-203-853-4433 • Fax: 1-203-849-1423

Vectron International reserves the right to make changes to the product(s) and/or information contained herein without notice.
 No liability is assumed as a result of their use or application.
 No rights under any patent accompany the sale of any such product(s) or information.




Filter Specification


TFS 280 A - 2/4

Construction, pin configuration and 50 Ω - matching network

(All dimensions in mm)

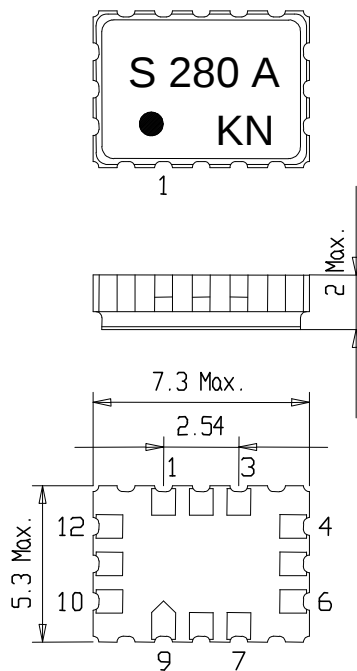

1 Output	7 Input
2 Ground	8 Ground
3 Ground	9 Ground
4 Ground	10 Ground
5 Ground	11 Ground
6 Ground	12 Ground

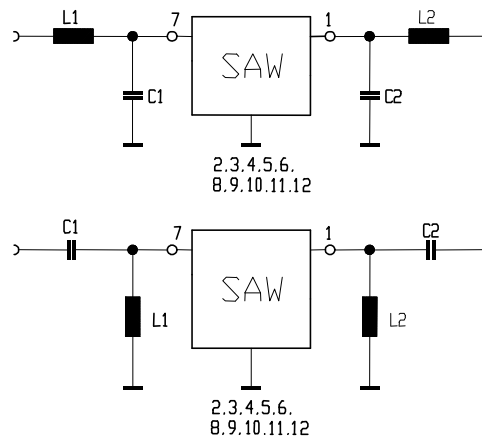

www.vectron.com

USA: Vectron International • 166 Glover Avenue, Norwalk, CT 06856 • Tel: 1-888-VECTRON-1 • Fax: 1-888-FAX-VECTRON
 EUROPE: In Denmark, Finland, Ireland, Italy, Israel, Norway, Spain, UK: Tel: 44(0) 1703 766 288 • Fax: 44 (0) 1703 766 822
 In Austria, Belgium, France, Germany, Luxembourg, Netherlands, Sweden, Switzerland: Tel: 49 (0) 72 63 648 0 • Fax: 49(0) 72 63 125
 ASIA: In China, Taiwan, Japan: Tel: 1-603-598-0075 • In Korea, Singapore, Australia, India: Tel: 1-203-853-4433 • Fax: 1-203-849-1423

Vectron International reserves the right to make changes to the product(s) and/or information contained herein without notice.
 No liability is assumed as a result of their use or application.
 No rights under any patent accompany the sale of any such product(s) or information.



Filter Specification

TFS 280 A - 3/4

Stability Characteristics

After the following tests the filter shall meet the whole specification:


1. Shock: 100g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,075 mm or 1g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Damp heat: 90 % to 95 % rel. humidity, 40 °C, 10 days;
(steady state) DIN IEC 68 - 2 - 3
4. Resistance to solder heat (reflow): max. 2 times reflow process;
for temperature conditions refer to the attached "Air reflow temperature conditions" on sheet 4;

Packing

Tape & Reel: IEC 286 - 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;
max. pieces of filters per reel: 3400


Tape (all dimensions in mm)

W	: 16 ± 0,3
Po	: 4 ± 0,1
Do	: 1,5 + 0,5
D1	: 1,5 + 0,5
E	: 1,75 ± 0,1
F	: 7,5 ± 0,1
G (min)	: 0,75
P2	: 2 ± 0,05
P1	: 8 ± 0,1
D1(min)	: 1,5
Ao	: 5,4 ± 0,1
Bo	: 7,4 ± 0,1

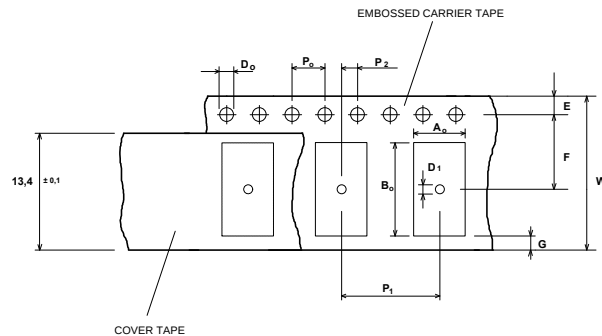

Reel (all dimensions in mm):

A	: 330
W1	: 16,4 +2
W2 (max)	: 22,4
N (min)	: >= 90
C	: 13 ± 0,25

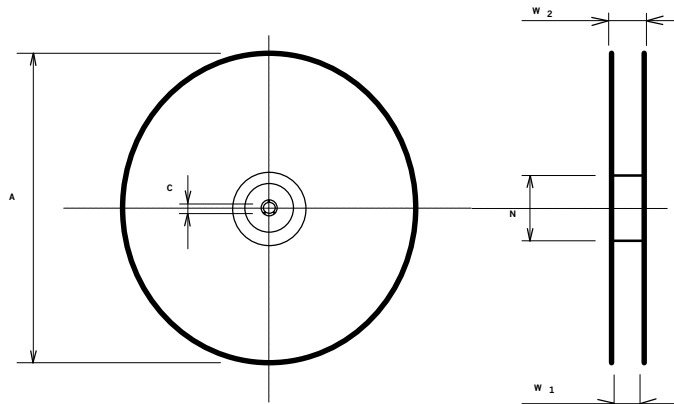

The minimum bending radius is 45 mm. The mounting surface of the filters faces the bottom side of the embossed carrier tape. The marking of the filters is able to read if the view is directed on the upper side of the carrier tape with the sprocket holes on the right side of the tape.



www.vectron.com

USA: Vectron International • 166 Glover Avenue, Norwalk, CT 06856 • Tel: 1-88-VECTRON-1 • Fax: 1-888-FAX-VECTRON
EUROPE: In Denmark, Finland, Ireland, Italy, Israel, Norway, Spain, UK: Tel: 44(0) 1703 766 288 • Fax: 44 (0) 1703 766 822
 In Austria, Belgium, France, Germany, Luxembourg, Netherlands, Sweden, Switzerland: Tel: 49 (0) 72 63 648 0 • Fax: 49(0) 72 63 125
ASIA: In China, Taiwan, Japan: Tel: 1-603-598-0075 • In Korea, Singapore, Australia, India: Tel: 1-203-853-4433 • Fax: 1-203-849-1423

Vectron International reserves the right to make changes to the product(s) and/or information contained herein without notice.
 No liability is assumed as a result of their use or application.
 No rights under any patent accompany the sale of any such product(s) or information.



Filter Specification

TFS 280 A - 4/4

Air reflow temperature conditions

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

Chip-mount air reflow profile

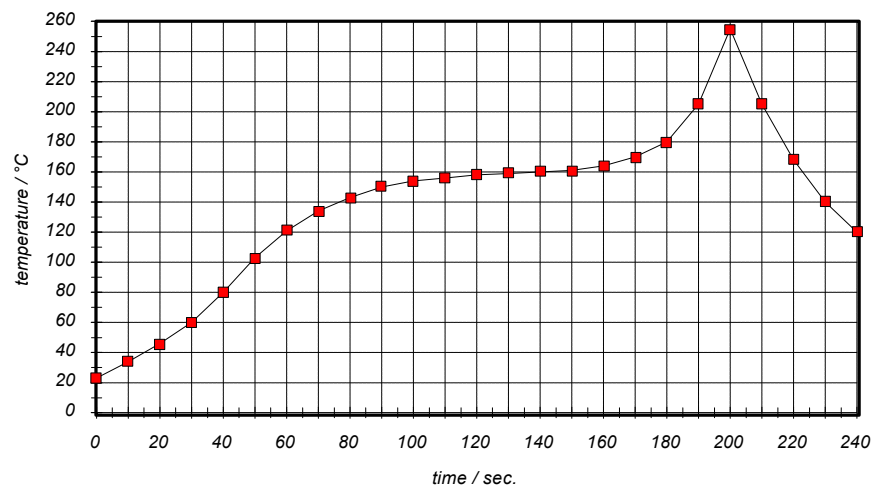


Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120



www.vectron.com

USA: Vectron International • 166 Glover Avenue, Norwalk, CT 06856 • Tel: 1-88-VECTRON-1 • Fax: 1-888-FAX-VECTRON
 EUROPE: In Denmark, Finland, Ireland, Italy, Israel, Norway, Spain, UK: Tel: 44(0) 1703 766 288 • Fax: 44 (0) 1703 766 822
 In Austria, Belgium, France, Germany, Luxembourg, Netherlands, Sweden, Switzerland: Tel: 49 (0) 72 63 648 0 • Fax: 49(0) 72 63 125
 ASIA: In China, Taiwan, Japan: Tel: 1-603-598-0075 • In Korea, Singapore, Australia, India: Tel: 1-203-853-4433 • Fax: 1-203-849-1423

Vectron International reserves the right to make changes to the product(s) and/or information contained herein without notice.
 No liability is assumed as a result of their use or application.
 No rights under any patent accompany the sale of any such product(s) or information.