

Features

- ☐ Dynamic random access memory
65536 x 4 bits manufactured
using a CMOS technology
- ☐ RAS access times 70 ns/80 ns
- ☐ TTL-compatible
- ☐ Three-state outputs bidirectional
- ☐ 256 refresh cycles
4 ms refresh cycle time
- ☐ STATIC COLUMN MODE
- ☐ Operating modes: Read, Write,
Read - Write,
RAS only Refresh,
Hidden Refresh with address
transfer
- ☐ Low power dissipation
- ☐ Power supply voltage 5 V
- ☐ Package PDIP18 (300 mil)
- ☐ Operating temperature range
0 to 70 °C
- ☐ Quality assessment according to
CECC 90000, CECC 90100 and
CECC 90112

Description

Addressing

The UD61466 is a dynamic random access memory organized 65536 words by 4 bits.

SCM facilitates faster data operation with predefined row address. Via 8 address inputs the 16 address bits are transmitted into the internal address memories in a time-multiplex operation. The falling RAS-edge takes over the row address. After the row address hold time the column address can be applied. During the Read cycle the address transfer is not latched by the falling edge at the $\overline{\text{CAS}}$ input, so that the column address must be applied until the data are valid at the output. During Write the column address is taken over with the falling edge of the control signal $\overline{\text{CAS}}$, or $\overline{\text{W}}$, that becomes active as the last. The selection of one or more memory circuits can be made via the RAS input.

Read-Write-Control

The choice between Read or Write cycle is made at the $\overline{\text{W}}$ input. HIGH at the $\overline{\text{W}}$ input causes a Read cycle, meanwhile LOW leads to a Write cycle.

Both $\overline{\text{CAS}}$ -controlled and $\overline{\text{W}}$ -controlled Write cycles are possible with activated RAS signal.


Data Output Control

The usual state of the data output is the High-Z state. Whenever $\overline{\text{CAS}}$ is inactive (HIGH), Q will float (High-Z). Thus, $\overline{\text{CAS}}$ functions as data output control.

After access time, in case of a Read cycle, the output is activated, and it contains the logic „0“ or „1“.

The memory cycle being a Read, Read-Write or a Write cycle ($\overline{\text{W}}$ -controlled), Q changes from High-Z state to the active state („0“ or „1“). After access time, the contents of the selected cell will be available, with the exception of the Write cycle. The output remains active until $\overline{\text{CAS}}$ becomes inactive, irrespective of RAS becoming inactive or not. The memory cycle being a Write cycle ($\overline{\text{CAS}}$ -controlled), the data output keeps its High-Z state throughout the whole cycle. This configuration makes Q fully controllable by the user merely through the timing of $\overline{\text{W}}$. The output storing the data, they remain valid from the end of access time until the start of another cycle.


Pin Configuration

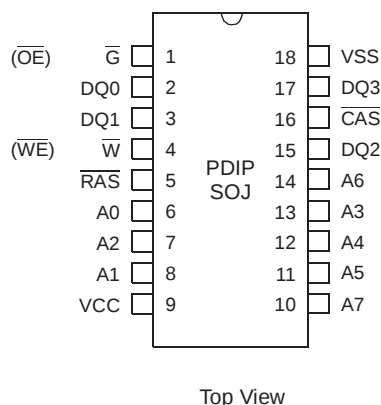

Pin Description

Signal Name	Signal Description
A0 - A7	Address Inputs
DQ0 - DQ3	Data In/Out
$\overline{\text{W}}$	Read, Write Control
$\overline{\text{RAS}}$	Row Address Strobe
$\overline{\text{G}}$	Output Enable
VCC	Power Supply Voltage
VSS	Ground
$\overline{\text{CAS}}$	Column Address Strobe

Block Diagram

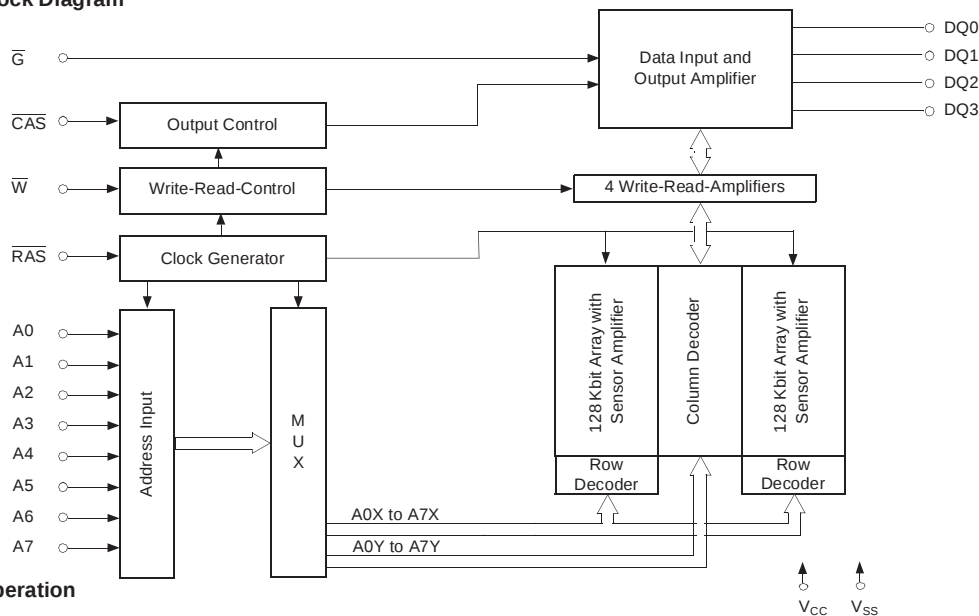

Operation

Function		$\overline{\text{RAS}}$	$\overline{\text{CAS}}$	$\overline{\text{W}}$	Address		$\overline{\text{G}}$	Data
					R	C		
Stand-by		H	X	X	X	X	X	High-Z
Read		L	L	H	Row	Column	L	Output Data
Write		L	L	L	Row	Column	X	Input Data
Read-Write		L	L	H $\rightarrow$ L	Row	Column	L $\rightarrow$ H	Output Data/Input Data
SCM Read	1st cycle	L	L	H	Row	Column	L	Output Data
	2nd cycle	L	L	H		Column	L	Output Data
SCM Write	1st cycle	L	L	L	Row	Column	X	Input Data
	2nd cycle	L	L	H $\rightarrow$ L		Column	X	Input Data
SCM Read-Write	1st cycle	L	L	H $\rightarrow$ L	Row	Column	L $\rightarrow$ H	Output Data/Input Data
	2nd cycle	L	L	H $\rightarrow$ L		Column	L $\rightarrow$ H	Output Data/Input Data
$\overline{\text{RAS}}$ only Refresh		L	H	X	Row		X	High-Z
HIDDEN Refresh*)	Read	L $\rightarrow$ H $\rightarrow$ L	L	H	Row	Column	L	Output Data
	Write	L $\rightarrow$ H $\rightarrow$ L	L	L	Row	Column	X	Input Data

*) Transfer of Refresh Address required

Characteristics

All voltages are referenced to $V_{SS} = 0$ V (ground).

All characteristics are valid in the power supply voltage range and operating temperature range indicated below.

Absolute Maximum Ratings	Symbol	Min.	Max.	Unit
Power Supply Voltage	V_{CC}	-0.5	7.0	V
Input Voltage ¹⁾	V_I	-1.0	7.0	V
Output Voltage ¹⁾	V_O	-1.0	7.0	V
Output Current ^{1a)}	I_O	-50	50	mA
Power Dissipation	P_D		1	W
Operating Temperature	T_a	0	70	°C
Storage Temperature	T_{stg}	-55	125	°C

Remarks: see page 7

Recommended Operating Conditions	Symbol	Min.	Max.	Unit
Power Supply Voltage	V_{CC}	4.5	5.5	V
Input Low Voltage ¹⁾	V_{IL}	-1.0	0.8	V
Input High Voltage	V_{IH}	2.4	5.5	V

Remark: see page 7

Capacitances	Conditions	Symbol	Min.	Max.	Unit
Input Capacitance A0 to A7	$V_{CC} = 5.0$ V $V_I = V_{SS}$ $f = 1$ MHz $T_a = 25$ °C	C_{I1}		6	pF
Input Capacitance RAS, $\overline{CAS}$, W and $\overline{G}$		C_{I2}		7	pF
Output Capacitance DQ0 to DQ3		C_O		7	pF

All pins not under test (alternating voltage) must be connected with ground.

Static Characteristics	Conditions	Symbol	Min.		Max.		Unit
			DC07	DC08	DC07	DC08	
Power Supply Current ²⁾ (average value of $\overline{\text{RAS}}$ cycles)	$t_{cW} = t_{cWmin}$ $t_{cR} = t_{cRmin}$	I_{CC1}			70	60	mA
Refresh Current ²⁾ (average value of $\overline{\text{RAS}}$ cycles)	$\overline{\text{CAS}} = V_{IH}$ $t_{cW} = t_{cWmin}$ $t_{cR} = t_{cRmin}$	I_{CC2}			70	60	mA
SCM Current ²⁾ (average value of SCM cycles)	$\overline{\text{RAS}} = V_{IL}$ $t_{c(A)} = t_{c(A)min}$	I_{CC3}			50	40	mA
Stand-by Current TTL Level	$\overline{\text{RAS}} = \overline{\text{CAS}} = V_{IH}$	I_{CC4}			2	2	mA
Stand-by Current CMOS Level	$\overline{\text{RAS}} = V_{CC} - 0.2 \text{ V}$ $\overline{\text{CAS}} = V_{CC} - 0.2 \text{ V}$	I_{CC5}			1	1	mA
Output High Voltage	$I_{OH} = -5 \text{ mA}$	V_{OH}	2.4	2.4			V
Output Low Voltage	$I_{OL} = 4.2 \text{ mA}$	V_{OL}			0.4	0.4	V
Input Leakage Current at any input, all other pins = 0 V	$V_I = 0 \text{ V to } 5.5 \text{ V}$	I_I	-10	-10	10	10	μA
Output Leakage Current Q = High-Z	$V_O = 0 \text{ V to } 5.5 \text{ V}$ $\overline{\text{RAS}} = \overline{\text{CAS}} = V_{IH}$	I_O	-10	-10	10	10	μA

Remarks: see page 7

Dynamic Characteristics	3)	Symbol		Min.		Max.		Unit
		Alt.	IEC	DC07	DC08	DC07	DC08	
□ ALL CYCLES								
Transition Time (Rise and Fall)	4)	t _T	t _t	3	3	50	50	ns
RAS Precharge Time		t _{RP}	t _w (RASH)	50	60			ns
CAS Precharge Time		t _{CP}	t _w (CASH)	10	10			ns
Row Address Set-up Time		t _{ASR}	t _{su} (RA-RAS)	0	0			ns
Row Address Hold Time		t _{RAH}	t _h (RAS-RA)	10	10			ns
Output Buffer Turn-off Delay Time	5)	t _{OFF}	t _v (CAS)	0	0	20	20	ns
Output Buffer Turn-off Delay Time from $\overline{OE}$	5)	t _{OEZ}	t _v (G)	0	0	20	20	ns
CAS to $\overline{RAS}$ Precharge Time	6)	t _{CRP}	t _{CASH-RASL}	5	5			ns
$\overline{RAS}$ to Column Address Delay Time		t _{RAD}	t _{RAS-CA}	15	15	35	40	ns
Column Address to $\overline{RAS}$ Lead Time		t _{RAL}	t _{CA-RASH}	35	40			ns
CAS to Output in Low-Z		t _{CLZ}	t _{CASL-QX}	0	0			ns
Refresh Period		t _{REF}	t _{rf}			4	4	ms
□ READ								
Random Read Cycle Time	7)	t _{RC}	t _{cR}	130	150			ns
Access Time from $\overline{RAS}$	8)	t _{RAC}	t _a (RAS)			70	80	ns
Access Time from Column Address	8)	t _{AA}	t _a (CA)			35	40	ns
Access Time from CAS	8)	t _{CAC}	t _a (CAS)			20	20	ns
OE Access Time	8)	t _{OEA}	t _a (G)			20	20	ns
$\overline{RAS}$ Pulse Width		t _{RAS}	t _w (RASL)	70	80	10000	10000	ns
CAS Pulse Width		t _{CAS}	t _w (CASL)	20	20	10000	10000	ns
Read Command Set-up Time		t _{RCS}	t _{su} (R-CAS)	0	0			ns
Read Command Hold Time ref. to $\overline{RAS}$	9)	t _{RRH}	t _h (RAS-R)	0	0			ns
Read Command Hold Time	9)	t _{RCH}	t _h (CAS-R)	0	0			ns
Column Address Hold Time ref. to $\overline{RAS}$	10)	t _{AR}	t _h (RAS-CA)	70	80			ns
Column Address Hold Time ref. to RAS Rise		t _{AH}	t _h (RASH-CA)	5	5			ns
$\overline{RAS}$ to $\overline{CAS}$ Delay Time	6)	t _{RCD}	t _{RASL-CASL}	20	20	50	60	ns
$\overline{CAS}$ Hold Time		t _{CSH}	t _{RASL-CASH}	70	80			ns
RAS Hold Time		t _{RSH}	t _{CASL-RASH}	20	20			ns
$\overline{RAS}$ Hold Time referenced to $\overline{OE}$		t _{ROH}	t _{GL-RASH}	10	10			ns

Remarks: see page 7

Dynamic Characteristics ³⁾	Symbol		Min.		Max.		Unit
	Alt.	IEC	DC07	DC08	DC07	DC08	
☐ WRITE							
Random Write Cycle Time ⁷⁾	t_{RC}	t_{cW}	130	150			ns
RAS Pulse Width	t_{RAS}	$t_{W(RASL)}$	70	80	10000	10000	ns
CAS Pulse Width	t_{CAS}	$t_{W(CASL)}$	25	25	10000	10000	ns
Write Command Pulse Width	t_{WP}	$t_{W(W)}$	15	15			ns
Write Command Set-up Time ¹¹⁾	t_{WCS}	$t_{su(W-CAS)}$	0	0			ns
Data Set-up Time ref. to $\overline{CAS}$ ¹²⁾	t_{DS}	$t_{su(D-CAS)}$	0	0			ns
Data Set-up Time ref. to $\overline{W}$ ¹²⁾	t_{DS}	$t_{su(D-W)}$	0	0			ns
Column Address Set-up Time ¹²⁾	t_{ASC}	$t_{su(CA-CAS)}$	0	0			ns
Column Address to $\overline{W}$ Delay Time ¹²⁾	t_{AWD}	$t_{su(CA-W)}$	0	0			ns
Write Command Hold Time	t_{WCH}	$t_{h(CAS-W)}$	15	15			ns
Write Command Hold Time ref. to $\overline{CAS}$ -High	-	$t_{h(CASH-W)}$	0	0			ns
Write Command Hold Time ref. to RAS	t_{WCR}	$t_{h(RAS-W)}$	55	60			ns
Write Command to $\overline{RAS}$ Lead Time	t_{RWL}	$t_{h(W-RAS)}$	20	20			ns
Write Command to $\overline{CAS}$ Lead Time	t_{CWL}	$t_{h(W-CAS)}$	20	20			ns
Data Hold Time ref. to $\overline{CAS}$ ¹²⁾	t_{DH}	$t_{h(CAS-D)}$	15	15			ns
Data Hold Time ref. to $\overline{W}$ ¹²⁾	t_{DH}	$t_{h(W-D)}$	15	15			ns
Column Address Hold Time ref. to $\overline{RAS}$	t_{AR}	$t_{h(RAS-CA)}$	55	60			ns
Column Address Hold Time ¹²⁾	t_{CAH}	$t_{h(CAS-CA)}$	15	15			ns
Column Address Hold Time ¹²⁾	t_{CAH}	$t_{h(W-CA)}$	15	15			ns
OE Command Hold Time	t_{OEH}	$t_{h(W-GL)}$	20	20			ns
$\overline{RAS}$ to $\overline{CAS}$ Delay Time ⁶⁾	t_{RCD}	$t_{RASL-CASL}$	20	20	50	60	ns
$\overline{CAS}$ Hold Time	t_{CSH}	$t_{RASL-CASH}$	70	80			ns
$\overline{RAS}$ Hold Time	t_{RSH}	$t_{CASL-RASH}$	20	20			ns
☐ READ-WRITE							
Read-Write Cycle Time ⁷⁾	t_{RWC}	t_{cRW}	185	205			ns
$\overline{RAS}$ Pulse Width	t_{RAS}	$t_{W(RASL)RW}$	125	135	10000	10000	ns
CAS Pulse Width	t_{CAS}	$t_{W(CASL)RW}$	75	75	10000	10000	ns
$\overline{CAS}$ Hold Time	t_{CSH}	$t_{(RASL-CASH)RW}$	125	135			ns
$\overline{RAS}$ to $\overline{WRITE}$ Delay Time ¹¹⁾	t_{RWD}	t_{RAS-W}	100	110			ns
$\overline{CAS}$ to $\overline{WRITE}$ Delay Time ¹¹⁾	t_{CWD}	t_{CAS-W}	50	55			ns
Column to $\overline{WRITE}$ Delay Time ¹¹⁾	t_{AWD}	$t_{(CA-W)RW}$	65	70			ns
☐ SCM							
Static Column Mode Cycle Time	t_{SC}	$t_{c(A)}$	50	50			ns
RAS Pulse Width	t_{RASC}	$t_{W(RASL)}$	70	80	100000	100000	ns
$\overline{CAS}$ Precharge Time ¹³⁾	t_{CP}	$t_{W(CASH)}$	10	10			ns

Remarks: see page 7

Dynamic Characteristics ³⁾	Symbol		Min.		Max.		Unit
	Alt.	IEC	DC07	DC08	DC07	DC08	
☐ SCM Read							
Column Address Hold Time ref. to $\overline{\text{RAS}}$ Rise ¹⁰⁾	t_{AH}	$t_{\text{h(RASH-CA)}}$	5	5			ns
Output Data Hold Time from Column Address	t_{AOH}	$t_{\text{V(CA)}}$	5	5			ns
☐ SCM Write							
Write Command Inactive Time	t_{WI}	$t_{\text{W(WH)}}$	10	10			ns
☐ SCM Read-Write							
Static Column Mode Read-Write Cycle Time	t_{SRWC}	$t_{\text{c(A)RW}}$	100	110			ns
Access Time from Last Write	t_{ALW}	$t_{\text{a(WL)}}$	65	75			ns
Output Data Enable Time from $\overline{\text{WRITE}}$	t_{OW}	$t_{\text{a(WH)}}$	35	40			ns
☐ HIDDEN REFRESH							
$\overline{\text{CAS}}$ Hold Time ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ Cycle)	t_{CHR}	$t_{\text{RASL-CASH}}$	15	15			ns

Remark: see below

Remarks:

- 1) The Input Low Voltage must not drop below -0.3 V for more than 40 ns.
- 1a) The total sum of the absolute values of output currents must not exceed 100 mA in case of static application.
- 2) The current is inversely proportional to the cycle time; the max. current is measured in the shortest cycle time.
- 3) For test conditions see test configuration for functional test and clock timing.
- 4) V_{IHmin} and V_{ILmax} are reference levels for time measurement of the input signals; transition times are measured between V_{IH} and V_{IL} .
- 5) $t_{\text{V(CAS)}}$ and $t_{\text{V(G)}}$ define the time at which the data output goes to High-Z; this time is not related to any level.

6) $t_{\text{RASL-CASLmax}}$ and $t_{\text{V(G)}}$ are given as reference points only; they do not represent restrictive conditions.

7) The values of t_{cWmin} , t_{cRmin} and t_{cRWmin} are used for indication of the particular cycle time in which full function is guaranteed in the temperature range from 0 to 70 °C. Values below the one shown above may cause permanent damage to the component.

8) Measured with a load equivalent to 2 TTL loads, 100 pF

9) In Read cycle either $t_{\text{h(RAS-R)}}$ or $t_{\text{h(CAS-R)}}$ must be kept.

10) $t_{\text{h(RASH-CA)}}$ is only required if the valid data are to be held beyond the rising edge of $\overline{\text{RAS}}$.

11) $t_{\text{su(W-CAS)}}$, $t_{\text{RAS-W}}$, $t_{\text{CAS-W}}$ and $t_{\text{(CA-W)RW}}$ do not represent restrictive parameters:

- if $t_{\text{su(W-CAS)}} \geq t_{\text{su(W-CAS)min}}$ and $t_{\text{h(CASH-W)}} \geq t_{\text{h(CASH-W)min}}$, the

cycle is a Write cycle ($\overline{\text{CAS}}$ -controlled), and the data output remains in High-Z throughout the whole cycle,


- if $t_{\text{CAS-W}} > t_{\text{CAS-Wmin}}$, $t_{\text{RAS-W}} > t_{\text{RAS-Wmin}}$ and $t_{\text{(CA-W)RW}} > t_{\text{(CA-W)RWmin}}$, the cycle is a Read-Write cycle, and the content of the cell is available at the data output,

- if none of these conditions is satisfied, the condition of the data output (at access time) is indeterminate, since a Write cycle ($\overline{\text{W}}$ -controlled) is carried out.

12) These parameters refer to $\overline{\text{CAS}}$ during $\overline{\text{Write}}$ ($\overline{\text{CAS}}$ -controlled), and to $\overline{\text{W}}$ ($\overline{\text{W}}$ -controlled) or to $\overline{\text{W}}$ during Read-Write.


13) Timing of $\overline{\text{CAS}}$ in SCM is necessary only if the data output is to go to High-Z between the read-out of two successive column addresses.

Test Configuration for Functional Check

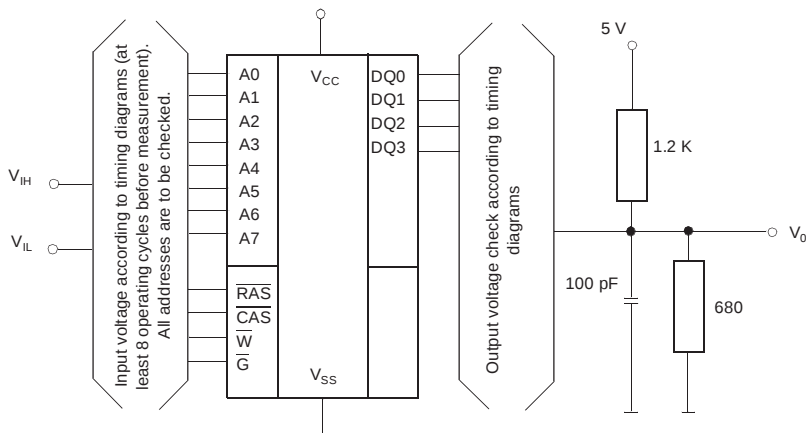



IC Code Numbers

Example

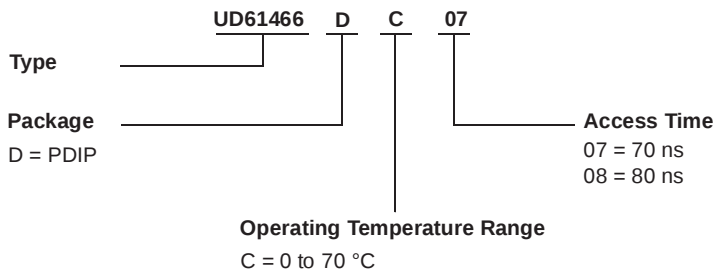


The date of manufacture is given by the 4 last digits of the mark, the 2 first digits indicating the year, and the last 2 digits the calendar week.


Read

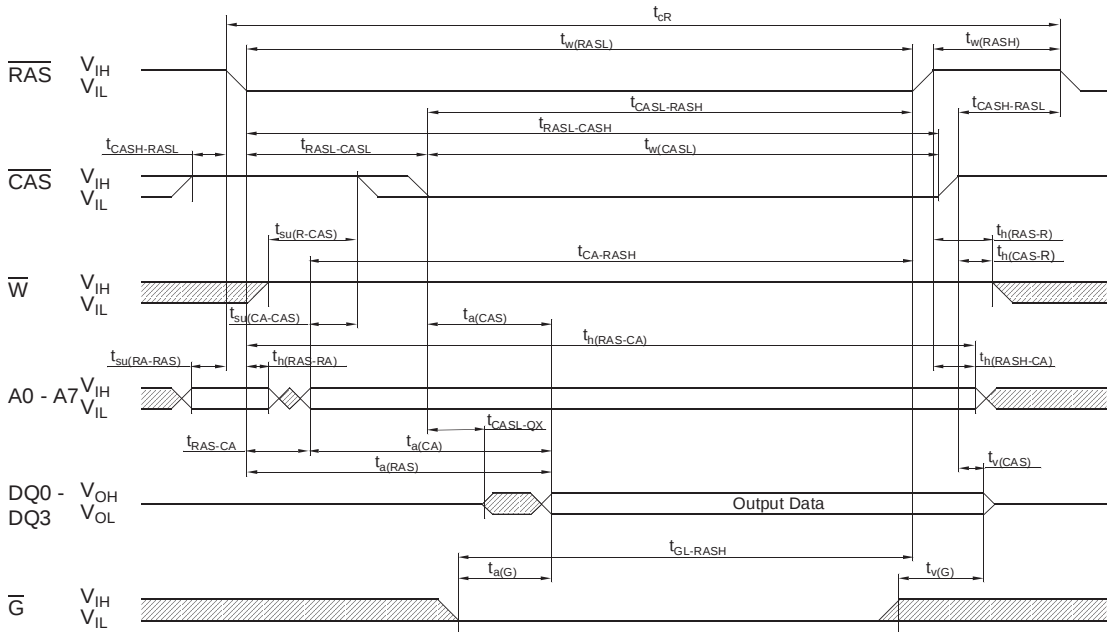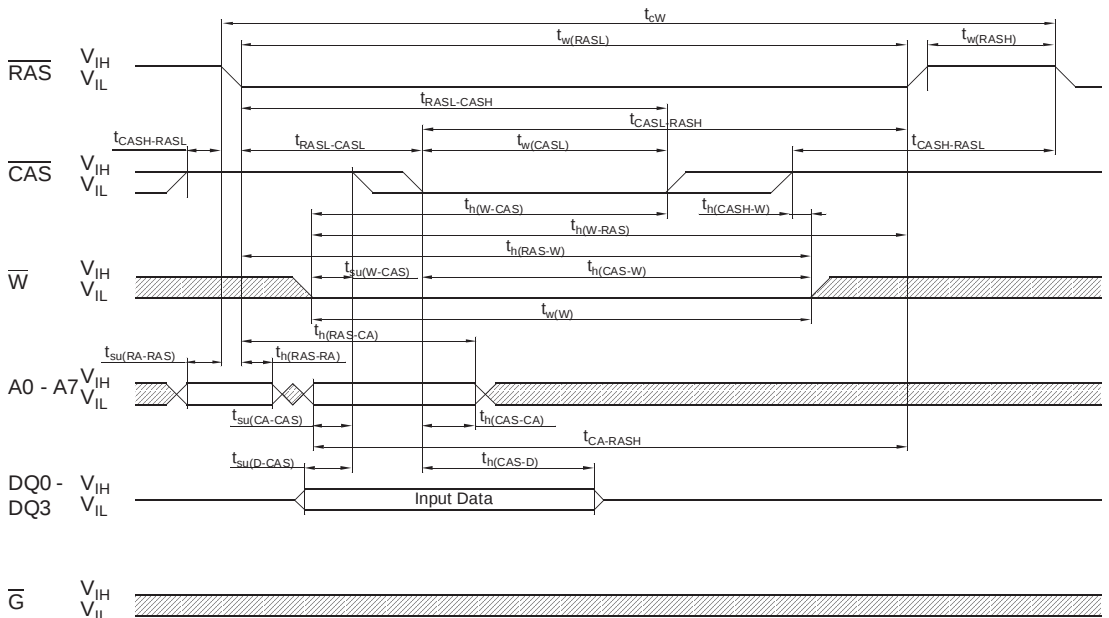Write ($\overline{\text{CAS}}$ -controlled)


Write ($\overline{W}$ -controlled)

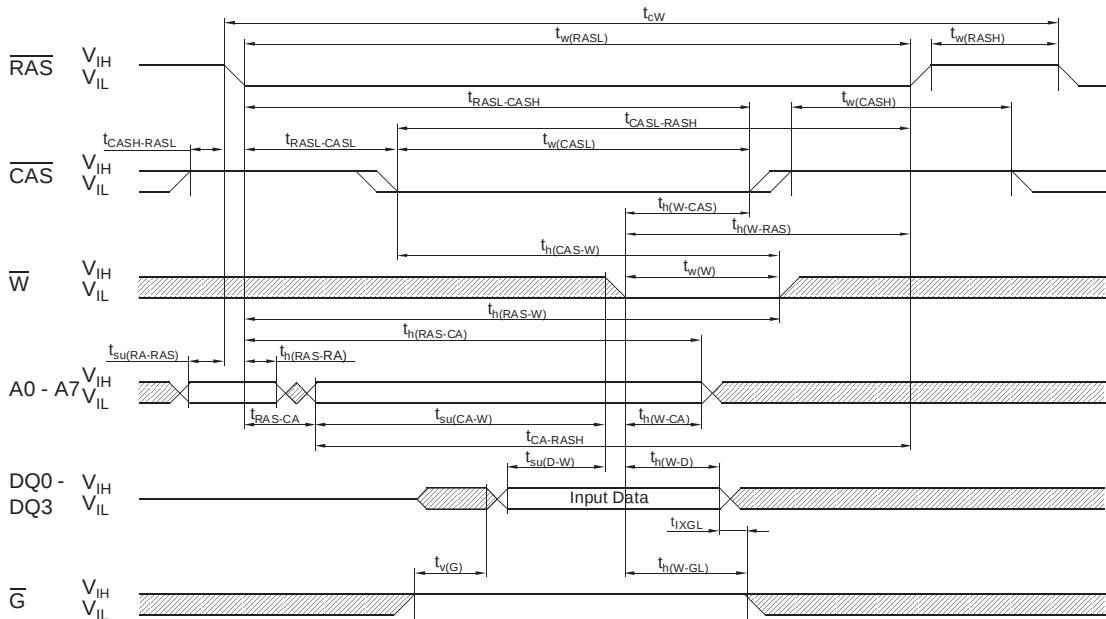


Read-Write


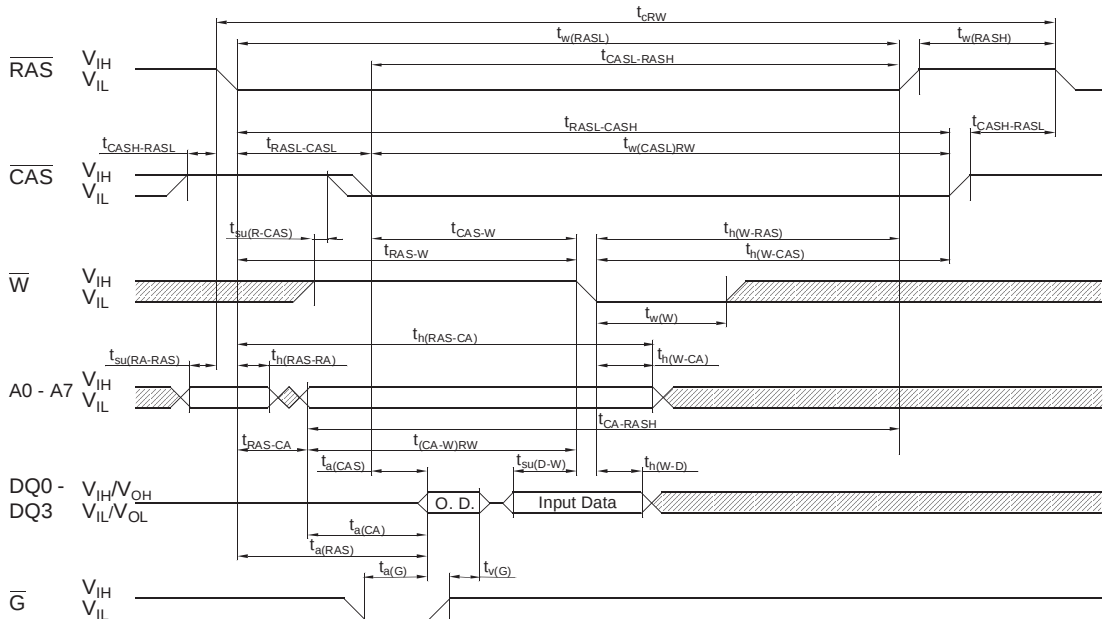


SCM Read-Write

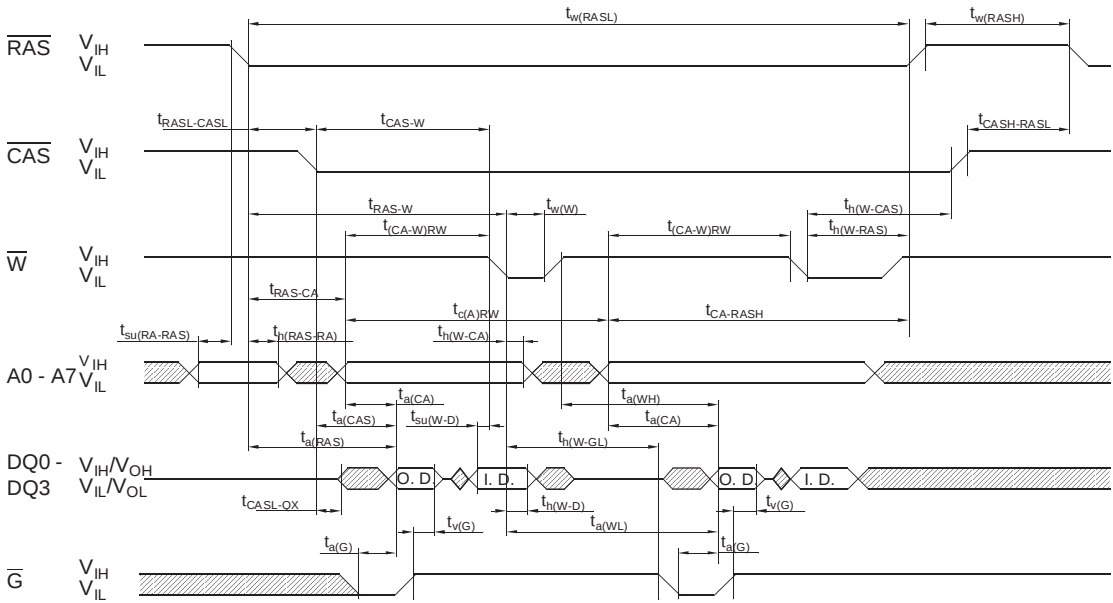

SCM Read-Write Mixed Cycle

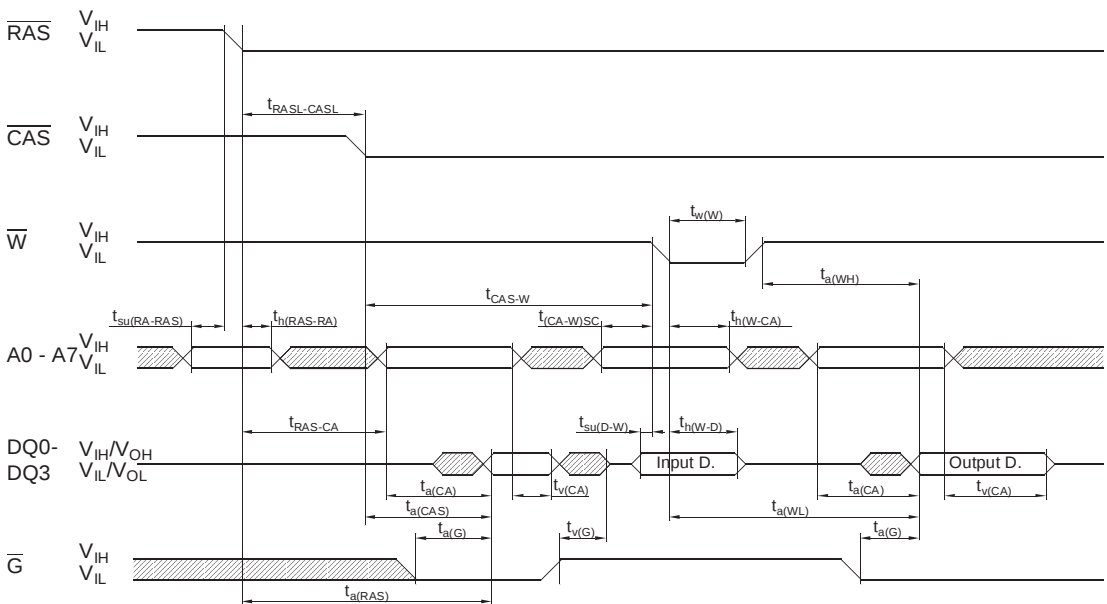

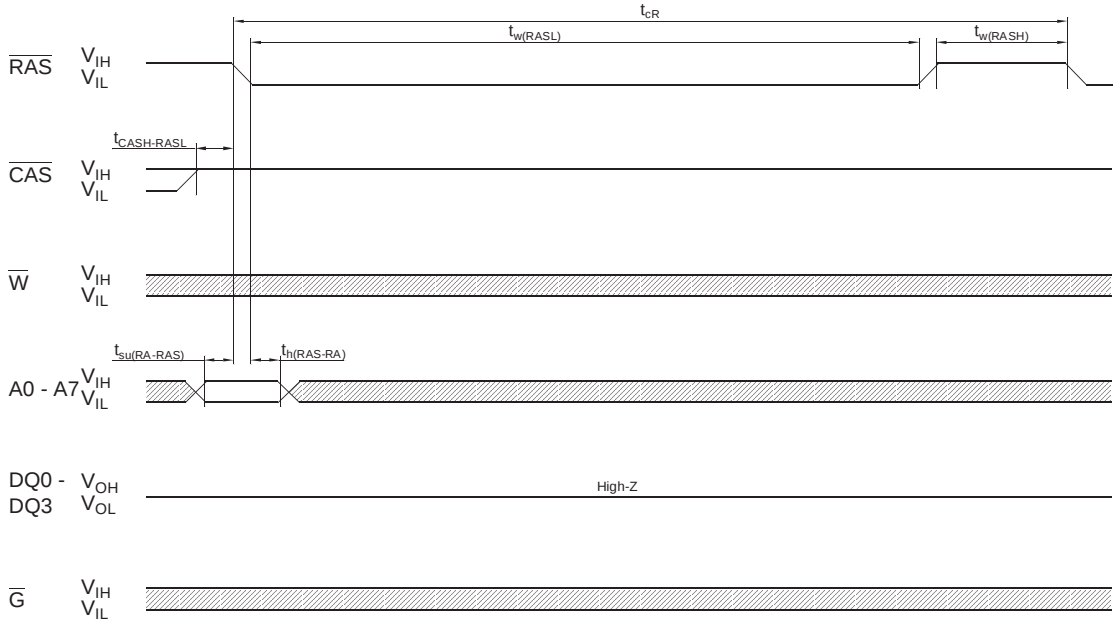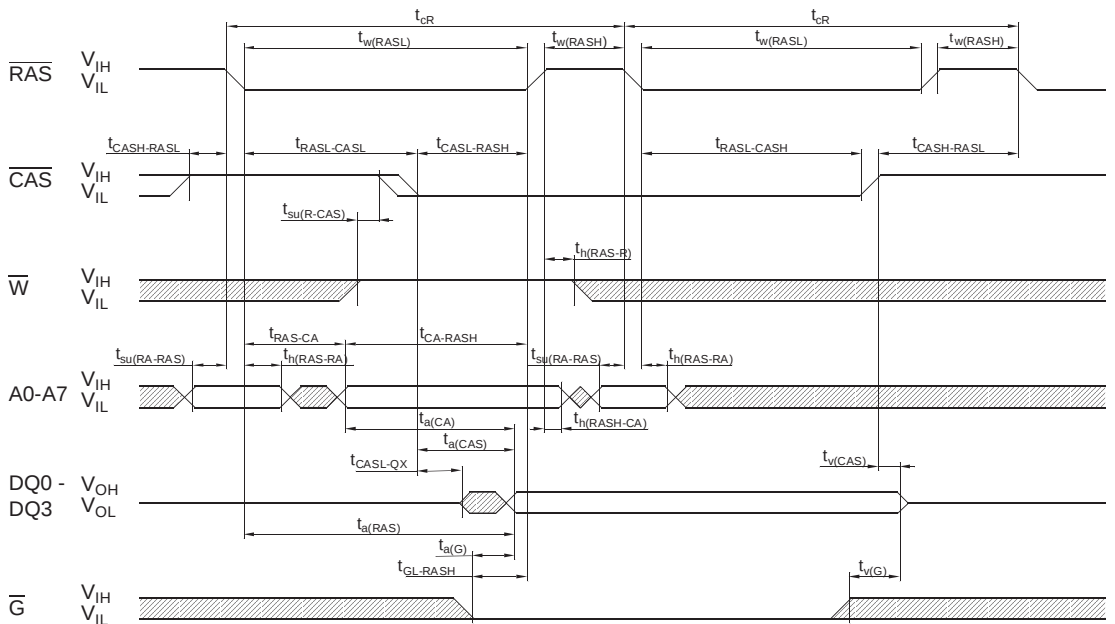RAS only Refresh**HIDDEN Refresh with address transfer**

LIFE SUPPORT POLICY

ZMD products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the ZMD product could create a situation where personal injury or death may occur. Components used in life-support devices or systems must be expressly authorized by ZMD for such purpose.

LIMITED WARRANTY

The information in this document has been carefully checked and is believed to be reliable. However Zentrum Mikroelektronik Dresden GmbH (ZMD) makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of whatever nature resulting from the use of, or reliance upon it. The information in this document describes the type of component and shall not be considered as assured characteristics.

ZMD does not guarantee that the use of any information contained herein will not infringe upon the patent, trademark, copyright, mask work right or other rights of third parties, and no patent or licence is implied hereby. This document does not in any way extent ZMD's warranty on any product beyond that set forth in its standard terms and conditions of sale.

ZMD reserves terms of delivery and reserves the right to make changes in the products or specifications, or both, presented in this publication at any time and without notice.