



DESCRIPTION

The IC will scan, debounce and encode an 8 x 14 keyboard matrix. It communicates with the host over the SPI channel, implementing a high-reliability two-way protocol. The SPICoder™ SA also offers programmable features for wake-up keys and general purpose I/O pins. The SPICoder™ SA is utilized in several Intel reference designs.


FEATURES

- SPI-compatible keyboard encoder and power management IC
- Ideal for use with the Intel StrongARM™ processor
- Uses patented extremely low-power operation — typically consuming less than 2 μ A between 3-5V
- Offers overall system power management capabilities
- Implements high-reliability two-way protocol
- Fully compatible with the Windows® CE keyboard spec
- Works with power management modes of Windows® CE
- Provides special modes of operation for H/PCs, including programmable “wake-up” keys
- Scans an 8 x 14 matrix and controls discrete switches and LED indicators
- Compatible with “system-on silicon” CPUs for H/PCs
- Available in small 44-pin QFP package

APPLICATIONS

- StrongARM™ handheld PCs
- Windows® CE platforms
- Web phones
- Personal digital assistants (PDAs)
- Wearable computers
- Internet appliances


PIN ASSIGNMENTS

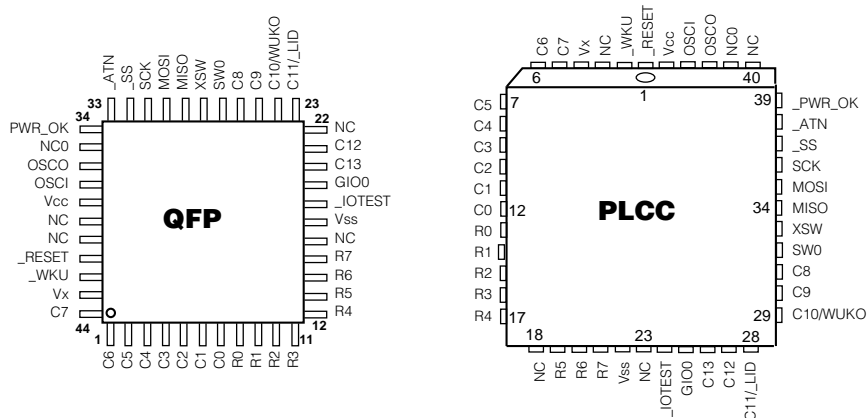

ORDERING CODE

Package options	Pitch In mm's	TA = -40°C to +85°C
44-pin, Plastic PLCC	1.27 mm	UR5CSPI-SA-FN
44-pin, Plastic QFP	0.8 mm	UR5CSPI-SA-FB

BLOCK DIAGRAM

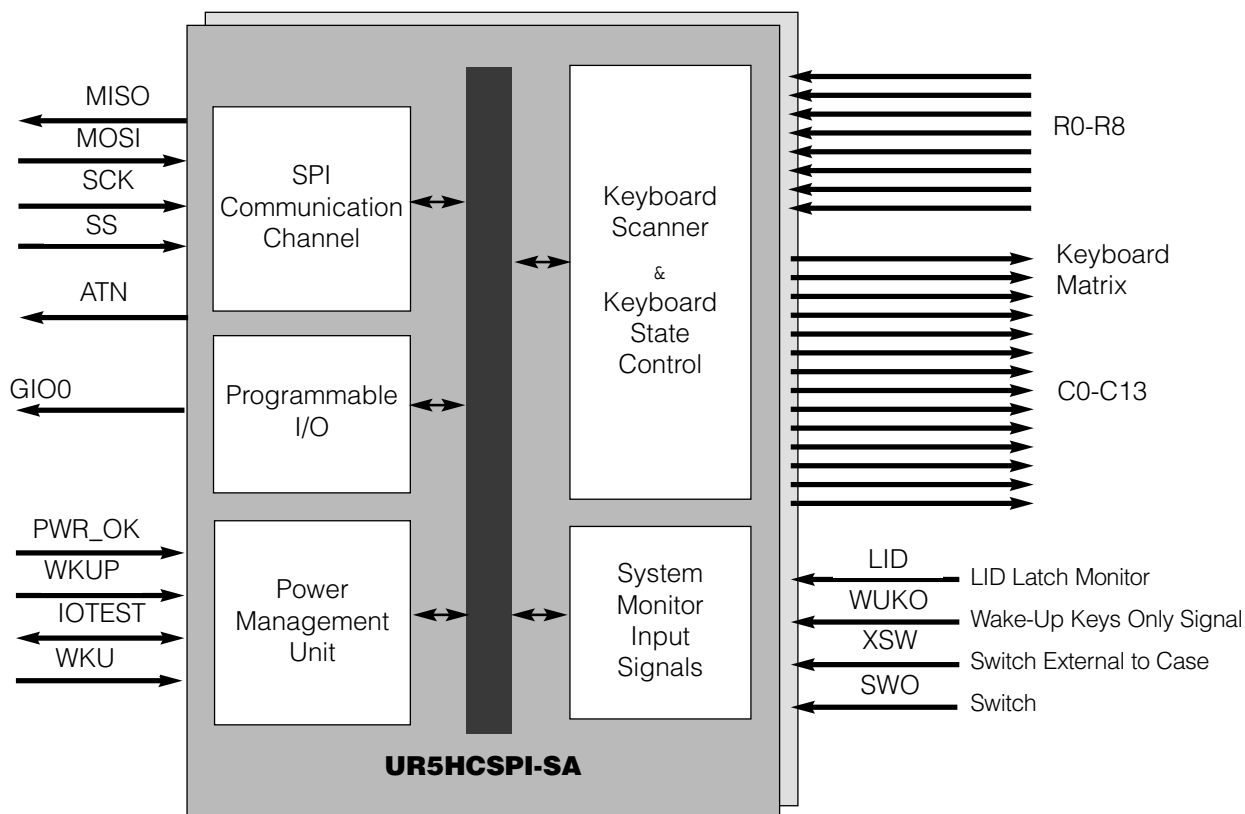

FUNCTIONAL DESCRIPTION

The SPICoder™ SA consists functionally of five major sections (see the Functional Diagram on page 2). These are the Keyboard Scanner and State control, the Programmable I/O, the SPI Communication Channel, the System Monitor and the Power Management unit. All sections communicate with each other and operate concurrently.

PIN DEFINITIONS

Mnemonic	PLCC	QFP	Type	Name and Function
VCC	44	38	I	Power Supply: 3-5V
VSS	22	17	I	Ground
VX	4	43	I	Tie to VCC
OSCI	43	37	I	Oscillator input
OSCO	42	36	O	Oscillator output
_RESET	1	41	I	Reset: apply 0V to provide orderly start-up
MISO	34	29	O	SPI Interface Signals
MOSI	35	30	I	
SCK	36	31	I	
_SS	37	32	I	Slave Select: If not used tie to VSS
_IOTEST	24	18	O	Wake-Up Control Signals
_WKU	2	42	I	
R0-R4	13-17	8-12	I	Row Data Inputs
R5-R7	19-21	13-15	I	Port provides internal pull-up resistors
C0-C5	12-7	7-2	O	Column Select Outputs:
C6-C7	6-5	1,44	O	
C8-C9	31-30	26-25	O	
C12	27	21	O	
C13	26	20	O	
C10/WUKO	29	24	I/O	Multi-function pins C10 & "Wake-Up Keys Only" input
C11/_LID	28	23	I/O	C11 & Lid latch detect input
GI00	25	19	I/O	Miscellaneous functions General programmable I/O
XSW	33	28	I	External discrete switch
SWO	32	27	I	Discrete switch
_ATN	38	33	O	Power Management Pins CPU Attention Output
_PWR_OK	39	34	I	Power OK Input
NC	3,18 23,40	39-40 16,22		No Connects: these pins are unused
NC0	41	35		NC0 should be tied to VSS or GND

Note: An underscore before a pin mnemonic denotes an active low signal.

PIN DESCRIPTIONS (CONT'D)

VCC and VSS

VCC and VSS are the power supply and ground pins. The SPICoder™ SA operates from a 3-5 Volt power supply. To prevent noise problems, provide bypass capacitors placed as close as possible to the IC with the power supply. VX, where available, should be tied to Vcc.

OSCI and OSCO

OSCI and OSCO provide the input and output connections for the on-chip oscillator. The oscillator can be driven by any of the following circuits:

- Crystal
- Ceramic Resonator
- External Clock Signal

The frequency of the on-chip oscillator is 2 MHz.

_RESET

A logic zero on the _RESET pin will force the SPICoder™ SA into a known start-up state. The reset signal can be supplied by any of the following circuits:

- RC
- Voltage monitor
- Master system reset

MOSI, MISO, SCK, _SS, _ATN

These five signals implement the SPI interface. The device acts as a slave on the SPI bus. The _SS (Slave Select) pin must go high between successive characters in an SPI message or a write collision error results. The _ATN pin is asserted low each time the SPICoder™ SA has a packet ready for delivery. For a more detailed description, refer to the SPI Communication Channel section of this document.

_IOTEST and _WUKU

The _IOTEST and _WUKU pins ("Input Output Test" and "Wake Up") pins control the stop mode exit of the device. The designer can connect any number of active low signals to these two pins through a 15K resistor, in order to force the device to exit the stop mode. A sample circuit diagram is included in this document. All the signals are "wire-anded." When any one of these signals is not active, it should be floating (i.e., these signals should be driven from "open-collector" or "open-drain" outputs).

R0 - R7

The R0-R7 pins are connected to the rows of the scanned matrix. Each pin provides an internal pull-up resistor, eliminating the need for external components.

C0 to C9

Pins C0 to C9 are bi-directional pins and are connected to the columns of the scanned matrix. When a column is selected, the pin outputs an active low signal. When the column is de-selected, the pin turns into high-impedance.

C10 / WUKO

The C10 / WUKO pin acts alternatively as column scan output and as an input. As an input, the pin detects the "Wake-Up Keys Only" signal, typically provided by the host CPU to indicate that the user has turned the unit off. When the device detects an active high state on this pin, it feeds this information into the "Keyboard State Control" unit, in order to disable the keyboard and enable the programmed wake-up keys.

C11 / _LID

The C11 / _LID pin acts in a similar manner to the C10 / WUKO. Typically this pin is connected to the LID latch through a 150K resistor, in order to detect physical closing of the device cover. When the pin detects an active low state in this input, it feeds this information into the "Keyboard State Control" unit, in order to disable keys inside the case and enable only switches located physically on the outer body of the H/PC unit.

PIN DESCRIPTIONS (CONT'D)

C12 and C13

C12 and C13 are used as additional column pins in order to accommodate larger-size keyboards, such as the Fujitsu FKB1406 palmtop keyboard.

G100

G100 is a programmable input/output switch or LED pin; it can also be used as a wake-up signal. Its programming is explained in the General Purpose I/O Pin section of this document.

XSW

The XSW pin is dedicated to an external switch. This pin is handled differently than the rest of the switch matrix and is intended to be connected to a switch physically located on the outside of the unit.

SW0


The SW0 pin is a dedicated input pin for a switch.

PWR_OK

The PWR_OK is an active low pin that monitors the battery status of the unit. When the SPICoder™ SA detects a transition from high to low on this pin, it immediately enters the STOP mode, turn the LED off and remains in this state until the batteries of the unit are replaced and the signal is deasserted.

THE WINDOWS® CE KEYBOARD

The following illustration shows a typical implementation of a Windows® CE keyboard.

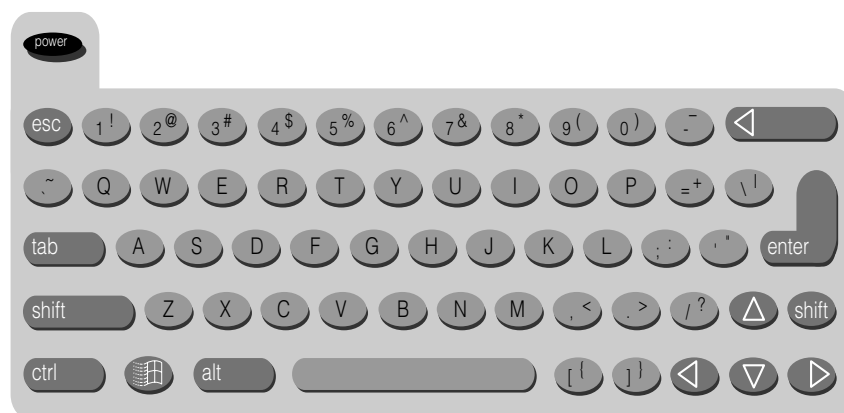

Windows® CE does not support the following keyboard keys typically found on desktop and laptop keyboards:

- INSERT
- SCROLL LOCK
- PAUSE
- NUM LOCK
- Function Keys (F1-F12)
- PRINT SCREEN

If the keyboard implements the Windows key, the following key combinations are supported in the Windows® CE environment:

Key Combination	Result
Windows	Open Start Menu
Windows+K	Open Keyboard Tool
Windows+I	Open Stylus Tool
Windows+C	Open Control Panel
Windows+E	Explore the H/PC
Windows+R	Display the Run Dialog Box
Windows+H	Open Windows® CE Help
Ctrl+Windows+A	Select all on desktop

"GHOST" KEYS

In any scanned contact switch matrix, whenever three keys defining a rectangle on the switch matrix are pressed at the same time, a fourth key positioned on the fourth corner of the rectangle is sensed as being pressed. This is known as the "ghost" or "phantom" key problem.

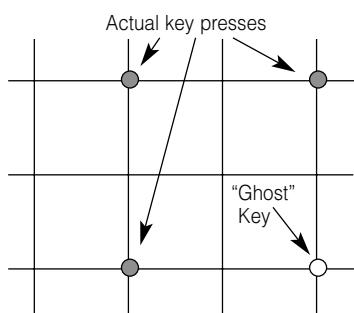


Figure 1: "Ghost" or "Phantom" Key Problem

Although the problem cannot be totally eliminated without using external hardware, there are methods to neutralize its negative effects for most practical applications. Keys that are intended to be used in combinations should be placed in the same row or column of the matrix, whenever possible. Shift keys (Shift, Alt, Ctrl, Window) should not reside in the same row (or column) as any other keys. The SPICoder™ SA has built-in mechanisms to detect the presence of "ghost" keys.

KEYBOARD SCANNER

The encoder scans a keyboard organized as an 8 row by 14 column matrix for a maximum of 112 keys. Smaller size matrixes can also be accommodated by simply leaving unused pins open. The SPICoder™ SA provides internal pull-ups for the row input pins. When active, the encoder selects one of the column lines (C0-C13) every 512 μ s and then reads the row data lines (R0-R7). A key closure is detected as a zero in the corresponding position of the matrix.

A complete scan cycle for the entire keyboard takes approximately 9.2 ms. Each key found pressed is debounced for a period of 20 ms. Once the key is verified, the corresponding key code(s) are loaded into the transmit buffer of the SPI communication channel.

KEYBOARD SCANNING

N-Key Rollover

In this mode, the code(s) corresponding to each key press are transmitted to the host system as soon as that key is debounced, independent of the release of other keys.

When a key is released, the corresponding break code is transmitted to the host system. There is no limitation to the number of keys that can be held pressed at the same time. However, two or more key closures, occurring within a time interval of less than 5 ms, will set an error flag and will not be processed. This feature is to protect against the effects of accidental key presses.

KEYBOARD STATES

These states of operation refer only to the keyboard functionality and, although they are related to power states, they are also independent of them.

"Send All Keys"

Entry Conditions: Power on reset, soft reset, PWR_OK = 1, {(LID=1) AND (WUKO=0)}

Exit Conditions: PWR_OK = 0 -> "Send No Keys"(WUKO=1) AND (Key Press) -> "Send Wake-Up Keys Only"(LID = 0) AND (WUKO=0) AND (Key Press) -> "Send XSW Key Only"

Description: This is the UR5HCSPI-SA's normal state of operation, accepting and transmitting every key press to the system. This state is entered after the user powers on the unit and it is sustained while the unit is being used.

"Send Wake-Up Keys Only"

Entry Conditions: (WUKO=1) AND (Key or Switch press)

Exit Conditions: Soft Reset -> "Send All Keys" PWR_OK = 0 -> "Send No Keys"

Description: This state is entered when the user turns the unit off. A signal line driven by the host will notify the UR5HCSPI-SA about this state transition. While in this state, the UR5HCSPI-SA will transmit only keys programmed to be wake-up keys to the system. It is not necessary for the UR5HCSPI-SA to detect this transition in real time, since it does not affect any operation besides buffering keystrokes.

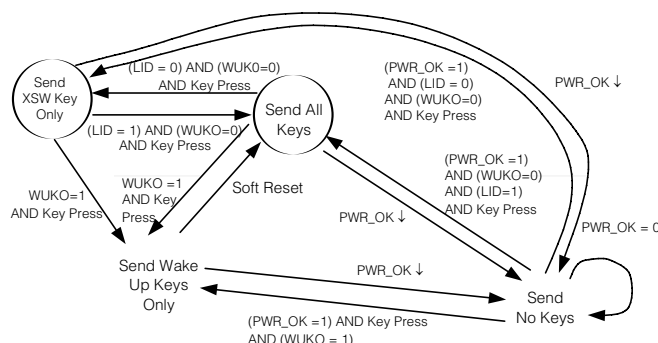


Figure 2: The UR5HCSPI-SA implements four modes of keyboard and switch operation.

"Send No Keys"

Entry Conditions: PWR_OK transition from high to low

Exit Conditions: (PWR_OK = 1) AND (Matrix key pressed OR Switch OR _WKUP)

Description: This state is entered when a PWR_OK signal is asserted (transition high to low), indicating a critically low level of battery voltage. The PWR_OK signal will cause an interrupt to the SPICoder™ SA, which guarantees that the transition is performed in real time. While in this state, the UR5HCSPI-SA will perform as follows:

1. The LED is turned off. Nevertheless, its state is saved and restored after exiting the disabled state (change of batteries).
2. The SPICoder™ SA enters the STOP mode for maximum energy conservation.

3. Stop mode time-out entry will be shortened to further conserve energy.

4. While in this state all interrupts are disabled. The SPICoder™ SA will exit this state on the next interrupt event that detects the PWR_OK line has been de-asserted.

"Send XSW Key Only"

Entry Condition: (LID=0) AND (WUKO=0) AND (Key Press)

Exit Condition: (LID=1) AND (WUKO=0) AND (Key Press) -> "Send All Keys" PWR_OK = 0 -> "Send No Keys" (WUKO = 1) AND (Key Press) -> "Send Wake Up Keys Only"

Description: This state is entered upon closing the lid of the device. While in this state, the encoder will transmit only the XSW key, which is located outside the unit. This feature is designed to accommodate buttons on the outside of the box, such as a microphone button, that need to be used while the lid is closed.

KEY MAP FOR THE FUJITSU FKB1406 (UR5HCSP1-SA)

		Columns (C0-C13)													
		0	1	2	3	4	5	6	7	8	9	10	11	12	13
Rows (R0-R6)	0	LAlt	`		LCtrl	FN	Esc	1 F1	2 F2	9 F9	0 F10	- NmLk	+ Bk		BkSp
			\	LSft			Del		T	Y	U Pad 4	I Pad 5	Enter	RShift	↓ PgDn
	1														
	2		TAB				Q	W	E	R	O Pad 6	P Ins	[Pause] ScrLk
	3		Z				CapLk			K Pad 2	L Pad 3	; PrtScr	' SysReq		↑ PgUp
	4		A				S	D	F	G	H	J Pad 1	/		← Home
	5		X				C	V	B	N Pad 0	M	,	.		Spc
6							3 F3	4 F4	5 F5	6 F6	7 F7	8 F8	Prog		→ End

KEYBOARD LAYOUT FOR FUJITSU FKB1406





KEY CODES

Key codes range from 01H to 73H and are arranged as follows:

Make code = column_number * 8 + row_number + 1

Break code = Make code OR 80H

Discrete Switches transmit the following codes:

XSW = 71H

SW0 = 72H

GIO0 = 73H

GENERAL PURPOSE I/O PIN

The SPICoder™ SA provides a general purpose I/O pin, GIO0, that can be programmed as Input, Output, Debounced Switch Input or LED Output. The programmable I/O pin can be configured to the desired mode through a command from the system. After the I/O pin is configured, the host system can read or write data to it. If the pin is configured as a Debounced Switch, it will return scan codes.

For Pin GIO0:

I/O Number = 0

LED Number = 0

Input Mode

While in the Input Mode, the GIO0 pin detects input signals and reports the input status to system as required.

Output Mode

In the Output Mode, the SPICoder™ SA controls the output signal level according to the system command. When the pin is set at output Mode, the default output is low.

Switch Input Mode

In Switch Input Mode, the SPICoder™ SA generates an individual make key code when the switch closes (pin goes low), and a break key code when the switch returns to open (pin goes to high). The switches generate key codes outside of those generated by the key matrix, from 71H - 73H. When the switch is closed, the SPICoder™ SA does not fall asleep.

PIN CONFIGURATIONS

When prototyping, caution should be taken to ensure that programming of the GIO0 pin does not conflict with the circuit implemented. A series protection resistor is recommended for protection from improper programming of the pin.

After a power-on or soft reset, GIO0 defaults to the Input state.

The following drawing illustrates the suggested interface to the general purpose input/output pin.

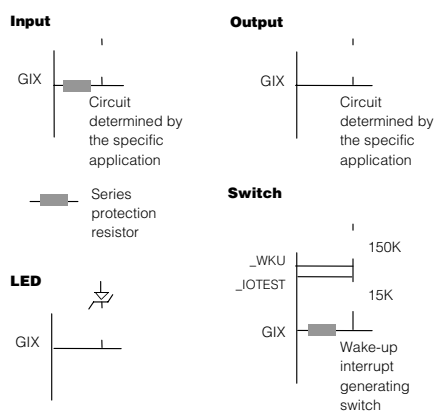


Figure 3: Suggested interface of general purpose input/output pin

LED MODES

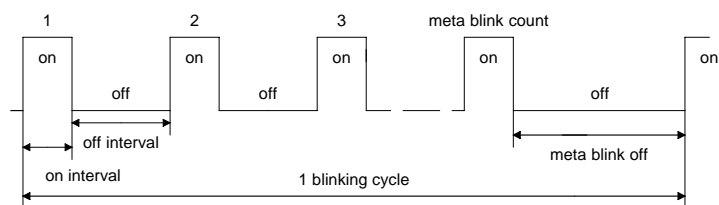


Figure 4: Timing chart: the behavior of an LED using the settings, 1: LED on; 0: LED off.

There are three LED modes: off, on, and blinking. The LED can be individually set to one of these modes. In the Blinking Mode, both the on-interval and the off-interval can be individually set. Additionally, a meta blink count and meta blink interval may be specified. This describes an interval of a different length which may be inserted after each specified number of blinks. All the intervals are based on a 1/16th of a second duration. When the LED is on or blinking, the SPICoder™ SA will not enter the STOP Mode unless the PWR_OK signal is asserted low. In this case, the device saves the status of the LED and turns it off. The default LED mode is off.

The above timing chart describes the behavior of an LED using these settings, 1: LED on; 0: LED off.

SPI COMMUNICATION CHANNEL

SPI data transfers can be performed at a maximum clock rate of 500 KHz. When the SPICoder™ SA asserts the $_ATN$ signal to the host Master, the data will have already been loaded into the data register waiting for the clocks from the master. One $_ATN$ signal is used per each byte transfer. If the host fails to provide clock signals for successive bytes in the data packet within 120 ms, the transmission is aborted and a new session is initiated by asserting a new $_ATN$ signal. In such a case, the whole packet is re-transmitted.

If the SPI transmission fails 20 times consecutively, the synchronization between the master and slave may be lost. In this case, the SPICoder™ SA enters the reset state.

When $CPHA = 0$, the shift clock is the OR of $_SS$ with SCK ; therefore, $_SS$ must go high between successive characters in an SPI message. The master can assert $_SS$ low only when it is getting ready to transmit or receive. After the last bit is shifted out, $_SS$ must go high within 60 μs .

The SPICoder™ SA implements the SPI communication protocol according to the following diagram:

$CPOL = 0$ ----- SCK line idles in low state

$CPHA = 0$ ----- SS line is an output enable control

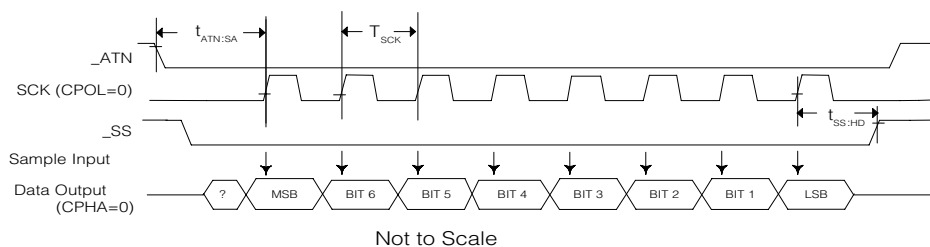


Figure 5: SPI Communication Protocol

When the host sends commands to the keyboard, the SPICoder™ SA requires that the minimum and maximum intervals between two successive bytes be 200 μs and 5 ms respectively.

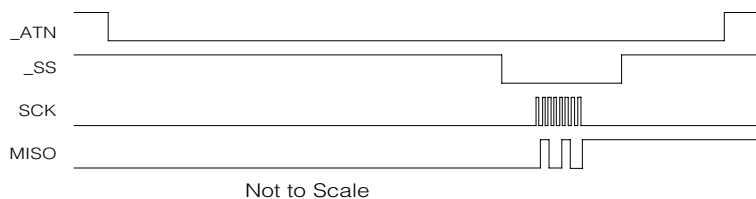


Figure 6: Transmitting Data Waveforms

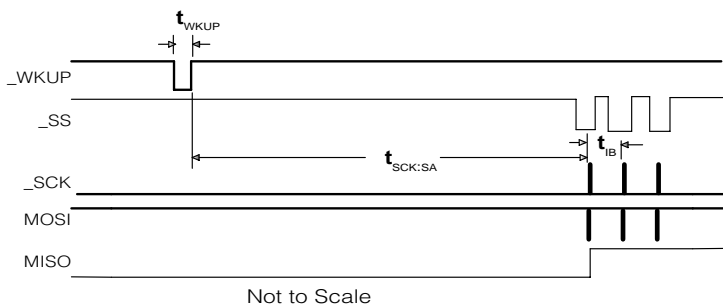


Figure 7: Receiving Data Waveforms

DATA / COMMAND BUFFER

The SPICoder™ SA implements a data buffer that contains the key code/command bytes waiting to be transmitted to the host. If the data buffer is full, the whole buffer is cleared and an "Initialize" command is sent to the host. At the same time, the keyboard is disabled until the "Initialize" or "Initialize Complete" command from the host is received.

SPI COMMUNICATION TABLE

The following table describes the specific timing referenced in diagrams on page 11.

Signal Name	Description	Min	Max	Units
tATN:SA	ATN to first clock pulse	-	120	mS
TCLK	Clock period	2	-	μS
tSS:HD	Last clock pulse to _SS de-assertion	-	60	μS
tWKUP	_WKUP pulse width	125	-	nS
tSCK:SA	_WKUP to first clock pulse	5	150	mS
tIB	Inter-byte period	0.2	5	mS

POWER MANAGEMENT UNIT

The UR5HCSPI-SA supports two modes of operation. The following table lists the typical and maximum supply current (no DC loads) for each mode at 3.3 Volts (+/- 10%).

Current	Typical	Max	Unit	Description
RUN	1.5	3.0	mA	Entered only while data/commands are in process and if the LEDs are blinking
STOP	2.0	20	μA	Entered after 125 mS of inactivity if LEDs slow

Power consumption of the keyboard sub-system is determined primarily by the use of the LEDs. While the SPICoder™ SA is in the STOP mode, an active low Wake-Up Output from the master must be connected to the edge-sensitive _WKU pin of the SPICoder™ SA. This signal wakes up the SPICoder™ SA in order to receive data from the master host. The master host must wait a minimum of 5 ms prior to providing clocks to the SPICoder™ SA. The SPICoder™ SA enters the STOP mode after a 125 ms period of keypad and/or host communications inactivity, or anytime the PWR_OK line is asserted low by the host. Note that while one or more keys are held pressed, the SPICoder™ SA does not enter the STOP mode until every key is released.

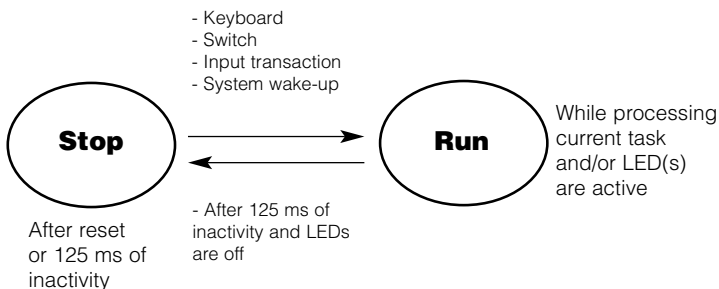


Figure 8: Power states of the SPICoder™ SA

COMMUNICATION PROTOCOL

There are eight commands that may be sent from the SPICoder™ SA to the host, and ten commands that may be sent from the host to the SPICoder™ SA.

Each command from SPICoder™ SA to the host is composed of a sequence of codes. All commands start with <CONTROL> code (80H) and end with LRC code (see the description of the LRC calculation on page 14). Command details are listed below.

Commands to the Host - Summary

Command Name	Code	Description
Initialize Request	AOH	Sent to the host when the data buffer is full
Initialize Complete	A1H	Issued upon completion of the "Initialize" command issued by the host
Heartbeat Response	A2H	Response to "Heartbeat Request" issued by the host
Identification Response	F2H	Response to "Identification Request" issued by the host
LED Status Report	A3H	Response to "LED Status Request"
Resend Request	A5H	Issued upon error during the reception of a packet
Input/Output Mode Status Report	A7H	Reports the status of GIO0 pin
Input/Output Data Report	A8H	Response to "I/O Data Request" command from the host

LRC CALCULATION

The LRC is calculated for the whole packet, including the Command Code and the Command Prefix. The LRC is calculated by first taking the bitwise exclusive OR of all bytes from the message. If the most significant bit (MSB) of the LRC is set, the LRC is modified by clearing the MSB and changing the state of the next most significant bit. Thus, the packet check byte will never consist of a valid LRC with the most significant bit set.

COMMANDS TO THE HOST ANALYTICALLY

Initialize Request

<CONTROL>	80H
<INIT>	A0H
<LRC>	20H

The SPICoder™ SA sends the Initialize Request Command to the host when its data buffer is full.

Initialization Complete

<CONTROL>	80H
<INIT COMPLETE>	A1H
<LRC>	21H

The SPICoder™ SA sends the Initialize Complete Report to the host when it finishes the initialization caused by Initialize Command from the host.

Heartbeat Response

<CONTROL>	80H
<ONLINE>	A2H
<LRC>	22H

The SPICoder™ SA sends the Heartbeat Response to the host when it receives the Heartbeat Request Command from the host.

Identification Response

<CONTROL>	80H	
<ID>	F2H	
<Vendor>	02H	--- Semtech
<Revision>	08H	--- Rev 0.8A
<Switch>	00H	.
<LRC>	7EH	

The SPICoder™ SA sends the Identification Response to the host when it receives the Identification Request Command from the host.

LRC CALCULATION (CONT'D)

The following C language function is an example of an LRC calculation program. It accepts two arguments: a pointer to a buffer and a buffer length. Its return value is the LRC value for the specified buffer.

```
char Calculate LRC (char buffer,
size_t buffer)
{
char LRC;
size_t index;
/*
* Init the LRC using the first two
message bytes.
*/
LRC = buffer [0] ^ buffer [1];
/*
* Update the LRC using the
remainder of the buffer.
*/
for (index = 2; index < buffer; index
++)
LRC ^ = buffer[index];
/*
* If the MSB is set then clear the
MSB and change the next most
significant bit
*/
if (LRC & 0x80)
LRC ^ = 0xC0;
/* * Return the LRC value for the
buffer.*/}
```

COMMANDS TO THE HOST FROM THE SPICODER™ SA

LED Status Report

<CONTROL>	80H	
<LED>	A3H	
<Status 0>	xxH	LED0 status:(0=OFF; 1=ON; 2=BLINKING; 3=NO LED MODE)
<Status 1>	xxH	LED1 status:(0=OFF; 1=ON; 2=BLINKING; 3=NO LED MODE)
<Status 2>	xxH	LED2 status:(0=OFF; 1=ON; 2=BLINKING; 3=NO LED MODE)
<LRC>	xxH	

The SPICoder™ SA sends the LED Status Report to the host when it receives the LED Status Request Command from the host.

Resend Request

<CONTROL>	80H
<RESEND>	A5H
<LRC>	25H

The SPICoder™ SA sends this Resend Request Command to the host when its command buffer is full, or if it detects either a parity error or an unknown command during a system command transmission.

Input/Output Mode Status Report

<CONTROL>	80H	
<MODIO>	A7H	
<IO NUMBER>	xxH	IO number, 0
<IO MODE>	xxH	IO mode: (0=input; 1=output; 2=switch; 3=LED)
<LRC>	xxH	

The SPICoder™ SA sends the I/O Mode Status Report to the host when it receives the I/O Mode Status Request Command from the host, in order to report the status of the GIO0 pin.

Input/Output Data Report

<CONTROL>	80H	
<MODIO>	A8H	
<IO NUMBER>	xxH	IO number, 0
<IO DATA>	xxH	IO data: (0=low, 1=high)
<LRC>	xxH	

The SPICoder™ SA sends the I/O Data Report to the host when it receives the I/O Data Request Command from the host.



COMMANDS FROM THE HOST TO THE SPICODER™ SA

Each command to SPICoder™ SA is composed of a sequence of codes. All commands start with <ESC> code (1BH) and end with the LRC code (bitwise exclusive OR of all bytes).

Commands from the Host - Summary

Command Name	Code	Description
Initialize	A0H	Causes the SPICoder™ SA to enter the power-on state
Initialization Complete	A1H	Issued as a response to the "Initialize Request"
Heartbeat Request	A2H	The SPICoder™ SA will respond with "Heartbeat Response"
Identification Request	F2H	The SPICoder™ SA will respond with "Identification Response"
LED Status Request	A3H	The SPICoder™ SA will respond with "LED Status Response"
LED Modify	A6H	The SPICoder™ SA will change the LED accordingly
Resend Request	A5H	Issued upon error during the reception of a packet
Input/Output Mode Modify	A7H	The SPICoder™ SA will modify or report the status of the GIO0 pin
Output Data to I/O pin	A8H	The SPICoder™ SA will output a signal to the GIO0 pin
Set Wake-Up Keys	A9H	Defines which keys are "wake-up" keys

COMMANDS FROM THE HOST TO THE SPICODER™ SA ANALYTICALLY

Initialize

<ESC>	1BH
<INIT>	A0H
<LRC>	7BH

When the SPICoder™ SA receives this command, it clears all buffers and returns to the power-on state.

Initialization Complete

<ESC>	1BH
<INIT COMPLETE>	A1H
<LRC>	7AH

When the SPICoder™ SA receives this command, it enables transmission of keyboard data. Keyboard data transmission is disabled if the TX output buffer is full (32 bytes). Note that if the transmit data buffer gets full the SPICoder™ SA issues an "Initialize Request" to the host.

Heartbeat Request

<ESC>	1BH
<ONLINE>	A2H
<LRC>	79H

When the SPICoder™ SA receives this command, it replies with the Heartbeat Response Report.

Identification Request

<ESC>	1BH
<ID>	F2H
<LRC>	29H

the SPICoder™ SA replies to this command with the Identification Response Report.

LED Status Request

<ESC>	1BH
<LED>	A3H
<LRC>	78H

When SPICoder™ SA receives this command, it replies with the LED Status Report.

COMMANDS FROM THE HOST TO THE SPICODER™ SA (CONT'D)

Set Wake-Up Keys

<ESC> 1BH
 <SETMATRIX> A9H
 <COL0> xxH
 (R7 R6 R5 R4 R3 R2 R1 R0
 Bitmap: 0-enabled 1-disabled)

<COL1> xxH
 <COL2> xxH
 <COL3> xxH
 <COL4> xxH
 <COL5> xxH
 <COL6> xxH
 <COL7> xxH
 <COL8> xxH
 <COL9> xxH
 <COL10> xxH
 <COL11> xxH
 <COL12>* xxH
 <COL13>* xxH
 <SWITCHES> xxH

(where SWITCHES bit assignments are = x x x x GIO0 SW0 XSW)

<LRC> xxH

The "Set Wake-Up Keys" command is used to disable specific keys from waking up the host. Using this command, the host can set only a group of keys to act as "power-on" switches. The host can change the keyboard behavior dynamically according to the system power management requirements. The default after power on is "All Keys Enabled."

LED Modify

<ESC> 1BH
 <MODLED> A6H
 <LED NUMBER> xxH LED number (0)
 <LED STATE> xxH (0=LED OFF; 1=LED ON; 2=LED BLINKING)
 <ON INTERVAL> xxH Time in 1/16ths of a second for LED to be on
 <OFF INTERVAL> xxH Time in 1/16ths of a second for LED to be off
 <META COUNT> xxH Number of blinks after which to apply meta blink interval
 <META INTERVAL> xxH Time in 1/16ths of a second for LED to be off after <META COUNT> blinks
 <LRC> xxH

When the SPICoder™ SA receives this command, it changes the LED mode accordingly.

I/O Mode Modify


<ESC> 1BH
 <MODIO> A7H
 <IO NUMBER> xxH IO number: 0
 <IO MODE> xxH IO mode: (0=input, 1=output, 2=switch, 3=LED, 4=current mode state request)
 <LRC> xxH

When the SPICoder™ SA receives this command, it changes the I/O pins' mode accordingly. If the <IO MODE> =4, the SPICoder™ SA sends the I/O Mode Status Report to the host.

Output Data to I/O Pin

<ESC> 1BH
 <MODIO> A8H
 <IO NUMBER> xxH IO number: 0
 <IO DATA> xxH IO data: (0=low, 1=high, 2=current
 I/O data request)
 <LRC> xxH

When the SPICoder™ SA receives this command, it changes the value of the output pin accordingly. If the addressed pin is not configured as an output pin, the command is ignored. If <IO DATA> =2, the SPICoder™ SA responds by issuing the I/O Data Status Report to the host.

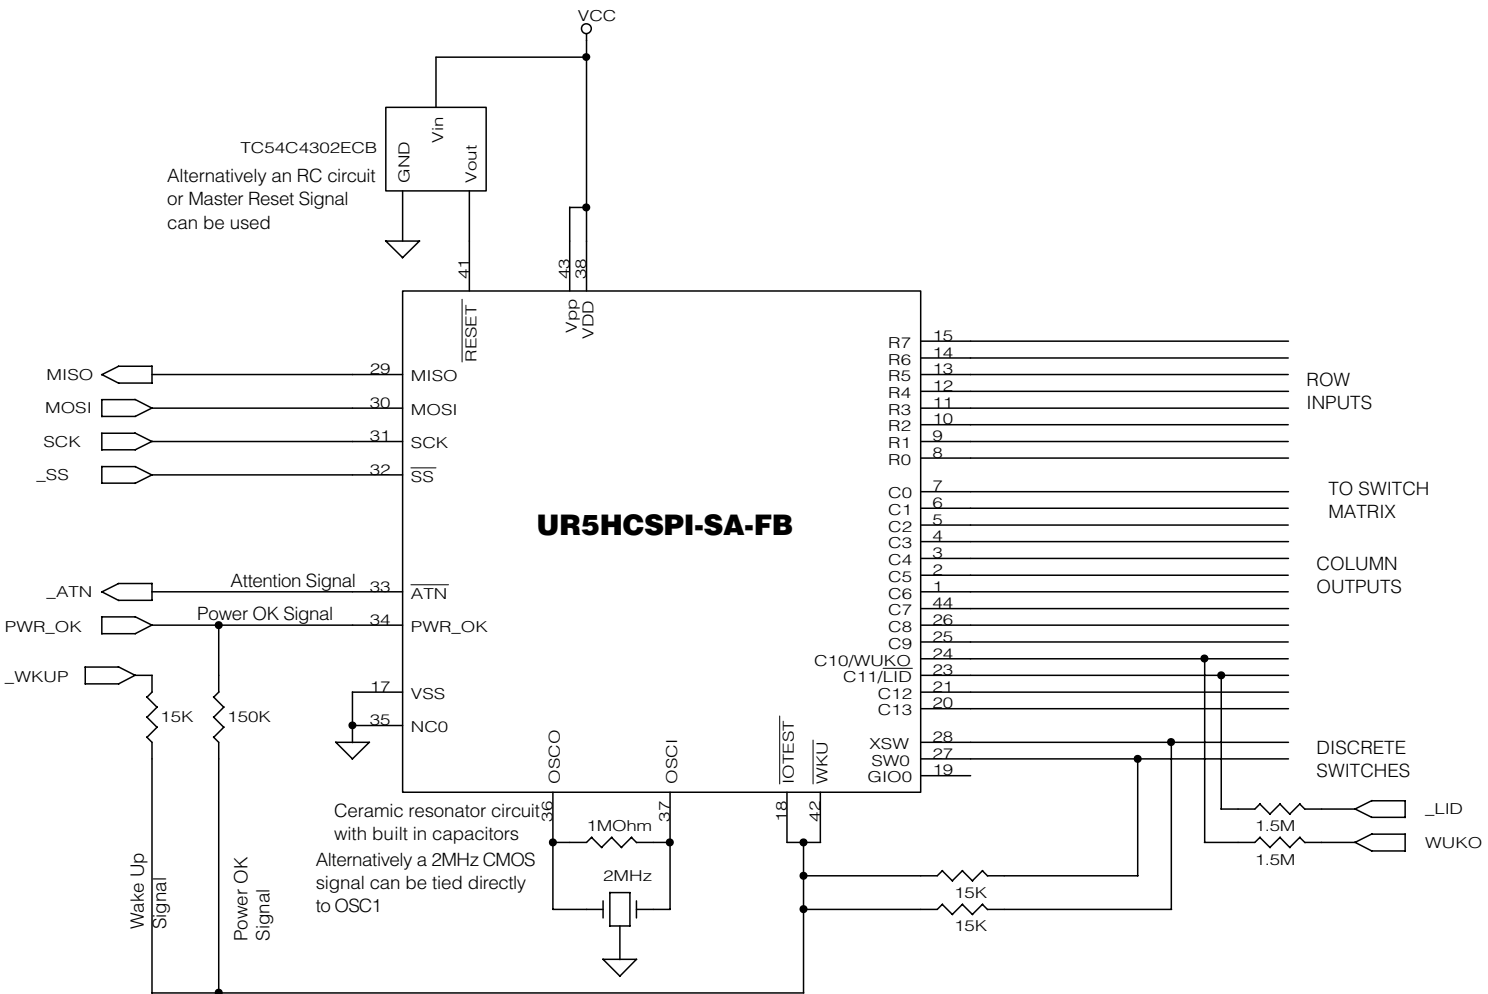

IMPLEMENTATION NOTES FOR THE SPICODER™ SA

The following notes pertain to the suggested schematic found on the previous page.

The built-in oscillator on the SPICoder™ SA requires the attachment of a 2.00 MHz ceramic resonator with built-in load capacitors. You can use either an AVX, part number PBRC-2.00 BR; or a Murata part number CSTCC2.00MG ceramic resonator.

It may also be possible to operate with the 2.00 MHz crystal, albeit with reduced performance. Due to their high Q, the crystal oscillator circuits start-up slowly. Since the SPICoder™ SA constantly switches the clock on and off, it is important that the ceramic resonator is used (it starts up much quicker than the crystal). Resonators are also less expensive than crystals.

Also, if crystal is attached, two load capacitors (33pF to 47pF) should be added, a capacitor between each side of the crystal and ground.

In both cases, using ceramic resonator with built-in load capacitors, or crystal with external load capacitors, a feedback resistor of 1 MegaOhm should be connected between OSCI and OSCO.

Troubleshoot the circuit by looking at the output pin of the oscillator. If the voltage is half-way between supply and ground (while the oscillator should be running) --- the problem is with the load caps / crystal. If the voltage is all the way at supply or ground (while the oscillator should be running) --- there are shorts on the PCB.

Note: When the oscillator is intentionally turned OFF, the voltage on the output pin of the oscillator is high (at the supply rail).

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Ratings	Symbol	Value	Unit
Supply Voltage	Vdd	-0.3 to +7.0	V
Input Voltage	Vin	Vss -0.3 to Vdd +0.3	V
Current Drain per Pin (not including Vss or Vdd)	I	25	mA
Operating Temperature	Ta	T low to T high	°C
UR5HCSPI-SA		-40 to +85	
Storage Temperature Range	Tstg -	65 to +150	°C

Thermal Characteristics

Characteristic	Symbol	Value	Unit
Thermal Resistance	Tja		°C per W
■ Plastic		60	
■ PLCC		70	

DC Electrical Characteristics (Vdd=3.3 Vdc +/-10%, Vss=0 Vdc, Temperature range=T low to T high unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Output Voltage (I load<10µA)	Vol			0.1	V
	Voh	Vdd-0.1			
Output High Voltage (I load=0.8mA)	Voh	Vdd-0.8			V
Output Low Voltage (I load=1.6mA)	Vol:			0.4	V
Input High Voltage	Vih	0.7xVdd		Vdd	V
Input Low Voltage	Vil	Vss		0.2xVdd	V
User Mode Current	Ipp		5	10	mA
Data Retention Mode (0 to 70°C)	Vrm	2.0			V
Supply Current (Run)	Idd		1.53	3.0	mA
(Wait)			0.711	1.0	mA
(Stop)			2.0	20	µA
I/O Ports Hi-Z Leakage Current	Iil			+/-10	µA
Input Current	Iin			+/- 1	µA
I/O Port Capacitance	Cio		8	12	pF

Control Timing (Vdd=3.3 Vdc +/-10%, Vss=0 Vdc, Temperature range=T low to T high unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
Frequency of Operation	fosc			MHz
■ Crystal Option			2.0	
■ External Clock Option		dc	2.0	
Cycle Time	tcyc	1000		ns
Crystal Oscillator Startup Time	toxov		100	ms
Stop Recovery Startup Time	tilch		100	ms
RESET Pulse Width	trl	8		tcyc
Interrupt Pulse Width Low	tlil	250		ns
Interrupt Pulse Period	tlil	*		tcyc
OSC1 Pulse Width	toh, tol	200		ns

*The minimum period tlil should not be less than the number of cycle times it takes to execute the interrupt service routine plus 21 tcyc.



BILL OF MATERIALS FOR UR5HCSPi-SA-FB

Quantity	Manufacture	Part#	Description
3	Generic	15K	15K Resistor
1	Generic	150K	150K Resistor
1	Generic	11M	1M Resistor
2	Generic	1.5K	1.5 Resistors
1	TELCOM	TC54VC4302ECB713	IC volt detector CMOS 4.3V SOT23, for 5V operation
		TC54VC4302ECB713	IC volt detector CMOS 2.7V SOT23, for 3.3V operation
1	AVX	PBRC-2.00BR	2.00 MHZ ceramic resonator with built in capacitors, SMT



SEMTECH

This Page Intentionally Left Blank

**For sales information
and product literature,
contact:**

HID & System Mgmt Division
Semtech Corporation
652 Mitchell Road
Newbury Park, CA 91320
hidinfo@semtech.com
<http://www.semtech.com/>
805 498 2111 Telephone
805 498 3804 Telefax

Semtech Western Regional Sales
805-498-2111 Telephone
805-498-3804 Telefax

Semtech Central Regional Sales
972-437-0380 Telephone
972-437-0381 Telefax

Semtech Eastern Regional Sales
203-964-1766 Telephone
203-964-1755 Telefax

Semtech Asia-Pacific Sales Office
+886-2-2748-3380 Telephone
+886-2-2748-3390 Telefax

Semtech Japan Sales Office
+81-45-948-5925 Telephone
+81-45-948-5930 Telefax

Semtech Korea Sales Sales
+82-2-527-4377 Telephone
+82-2-527-4376 Telefax

Northern European Sales Office
+44 (0)2380-769008 Telephone
+44 (0)2380-768612 Telefax

Southern European Sales Office
+33 (0)1 69-28-22-00 Telephone
+33 (0)1 69-28-12-98 Telefax

Central European Sales Office
+49 (0)8161 140 123 Telephone
+49 (0)8161 140 124 Telefax

Copyright ©1998-2001 Semtech Corporation. All rights reserved.
SPICoder and Self-Power Management are trademarks of Semtech Corporation. Semtech is a registered trademark of Semtech Corporation. All other trademarks belong to their respective companies.

INTELLECTUAL PROPERTY DISCLAIMER
This specification is provided 'as is' with no warranties whatsoever including any warranty of merchantability, fitness for any particular purpose, or any warranty otherwise arising out of any proposal, specification or sample. A license is hereby granted to reproduce and distribute this specification for internal use only. No other license, expressed or implied to any other intellectual property rights is granted or intended hereby. Authors of this specification disclaim any liability, including liability for infringement of proprietary rights, relating to the implementation of information in this specification. Authors of this specification also do not warrant or represent that such implementation(s) will not infringe such rights.