

GENERAL-PURPOSE HIGH-FREQUENCY WIDEBAND AMPLIFIERS

μ PC1675G, μ PC1676G, μ PC1688G

1. GENERAL

The μ PC1675G, μ PC1676G and μ PC1688G are silicon monolithic ICs developed as general-purpose high-frequency wideband amplifiers.

These ICs are based on the μ PC1651G packaged in a 4-pin disc mold. The present ICs are each packaged in a 4-pin mini-mold suitable for surface mounting on higher density print board. (the μ PC1651G has been discontinued).

The features of these amplifier ICs are:

- <1> The 4-pin mini-mold package as shown in Figure 1 substantially reduces the mounting area.
- <2> The ICs are supplied on an embossed tape conforming to EIAJ's "Taping Dimensions of Electronic Components (RC-1009)". This embossed tape is 8 mm wide, and suits automatic mounting.
- <3> The following three models are available, classified by power gain.

μ PC1675G: $G_P = 12$ dB TYP., $NF = 5.5$ dB TYP. (@ $f = 500$ MHz)

μ PC1676G: $G_P = 22$ dB TYP., $NF = 4.5$ dB TYP. (@ $f = 500$ MHz)

μ PC1688G: $G_P = 21$ dB TYP., $NF = 4.0$ dB TYP. (@ $f = 500$ MHz)

<4> All the models can operate at high frequency and in wide band.

μ PC1675G: 1900 MHz TYP.


μPC1676G: 1200 MHz TYP.

1/PC1688G-1100 MHz TYP

<5> Input/output matched to $Z_0 = 50 \Omega$

<6> Single power source ($V_{CC} = 5$ V TYP.)


Figure 1. Package (unit: mm)

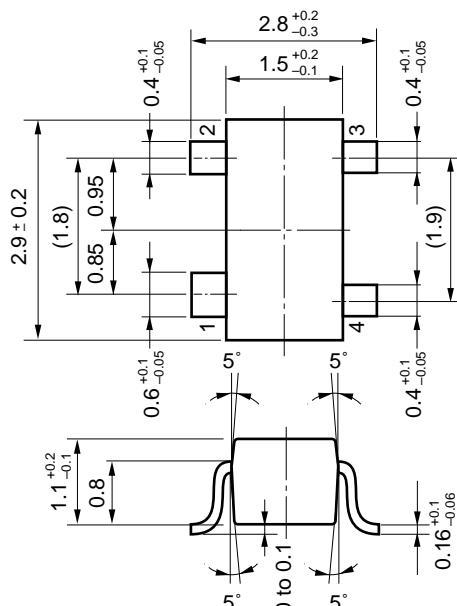

Pin connections

1. GND
2. Output
3. Vcc
4. Input

Figure 2. Internal Equivalent Circuit

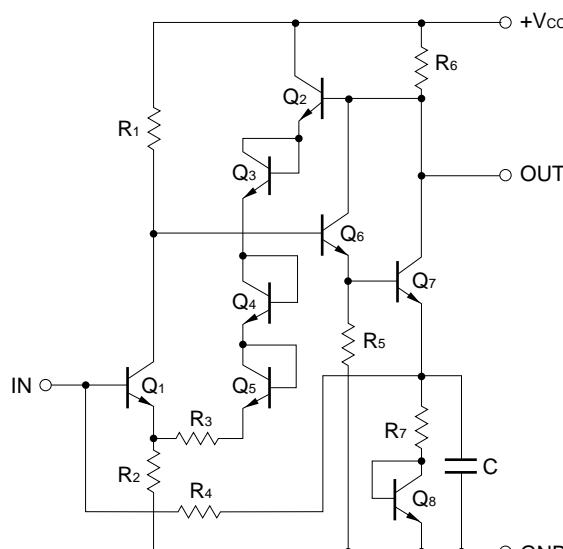


2. CIRCUIT CONFIGURATION

Figure 2 shows the internal equivalent circuit of the μ PC1675G/ μ PC1676G/ μ PC1688G.

The equivalent circuits of all the models are the same, and gain is set by changing R_2 , R_3 , R_4 , and R_7 . Like the μ PC1651G, each circuit is designed as multiple negative feedback amplification from the output block to the base and emitter of Q_1 . MOS capacitance C is connected to the emitter of Q_7 to peak the frequency characteristics.

The basic circuit is the single-end multiple negative feedback amplification type shown in Figure 3. This circuit configuration has the following features:

Figure 3. Circuit Configuration

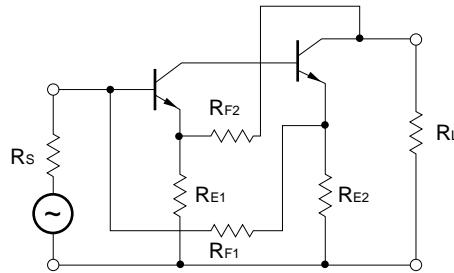

- <1> Excellent frequency-gain characteristics.
- <2> The input/output impedance and gain can be determined by the feedback resistance.
- <3> Excellent noise characteristics because the resistance at the emitter of transistor in the input stage is lower than that of the differential circuits.
- <4> Excellent impedance matching with external circuits as compared with differential circuits, improving the output efficiency and decreasing the noise.

As the first approximation, the input/output impedances R_i and R_o , and gain S_{21} of the circuit in Figure 3 can be generally determined by the following equation.

$$R_i = \frac{(R_{F2} + R_{E2}) R_{E1} \cdot R}{R_{E1} \cdot R + R_{E2} (R_{F1} + R_{E1} + R)} \quad \dots \dots \dots (1)$$

$$R_o = \frac{(R_{F1} + R_{E1}) R_{E2} \cdot R}{R_{E1} (R_{E2} + R_{F2} + R) + R_{E2} \cdot R} \quad \dots \dots \dots (2)$$

$$S_{21} = \frac{R_{F1} + R_{E1}}{R_{E1}} \quad \dots \dots \dots (3) \quad (\text{where } R_s = R_L = R)$$

By following modification on Figure 3, multiple negative feedback amplifier is realized as monolithic IC shown in Figure 2.

- <1> To increase the feedback loop gain, the final stage Q₆ and Q₇ are connected in a Darlington configuration. Q₆ is connected to R₅ to optimize the bias current.
- <2> As for feedback to the emitter of Q₁ from the collectors of Q₆ and Q₇, the impedance and voltage are adjusted by the emitter-follower configuration of Q₂ and the diodes of Q₃ through Q₅.
- <3> Q₈ diode rises up Q₇ emitter potential to supply bias current to Q₁ base through feedback path.

Simulation results of input/output impedance and gain vs. R₃, R₄ feedback resistance are shown below (the result of this simulation is slightly different from the calculation using equation 1 through 3 because the circuit configuration is more complicated than Figure 3. R₃ is equivalent to R_{F2} in Figure 3, and R₄ is equivalent to R_{F1}).

Figure 4. Input/Output Impedance vs. Feedback Resistor


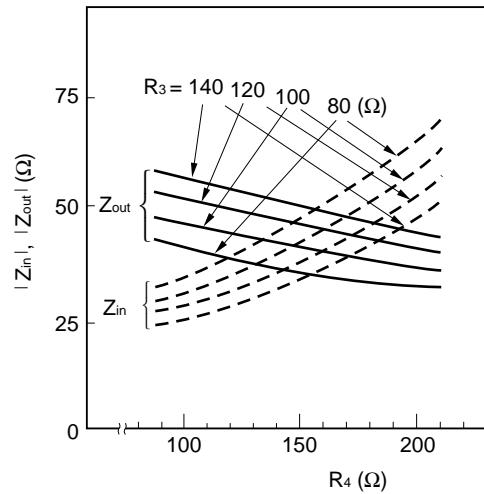


Figure 5. Forward Transmission Gain vs. Negative Feedback Resistor

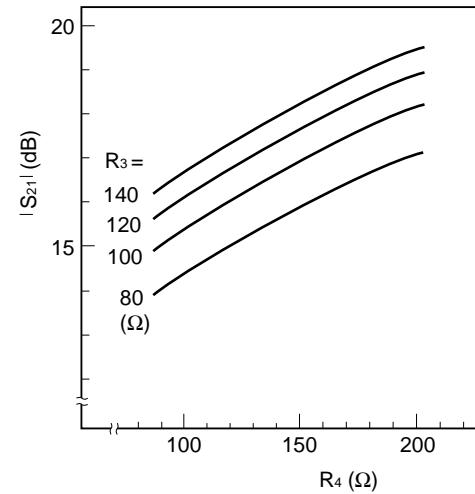

As shown in Figures 4 and 5, the input/output impedance and gain can be easily controlled by feedback resistors R₃ and R₄.

Respectively, the input/output impedance is set to 50 Ω for wideband operation, and R₃ and R₄ to 120 Ω and 200 Ω to obtain a sufficient gain.

3. CHARACTERISTICS

This chapter compares the measured characteristics of μ PC1675G and μ PC1676G as representative IC. The absolute maximum ratings and electrical characteristics are shown in Table 1 and 2. (Test circuit is shown in Figure 20.)

Table 1. Absolute Maximum Ratings ($T_A = +25$ °C)

Parameter	Symbol	Rating		Unit
Supply voltage	V_{CC}	6		V
Total dissipation	P_T	200		mW
Operating temperature range	T_{opt}	−40 to +85		°C
Storage temperature range	T_{stg}	−55 to +150		°C

Table 2. Electrical Characteristics ($V_{CC} = 5$ V, $T_A = +25$ °C)

Parameter	Symbol	Condition	Specifications						Unit	
			μ PC1675G			μ PC1676G				
			MIN.	TYP.	MAX.	MIN.	TYP.	MAX.		
Supply current	I_{CC}	Without signal	12	17	22	14	19	24	mA	
Power gain	G_P	$f = 500$ MHz	10	12	14	19	22	24	dB	
Noise factor	NF	$f = 500$ MHz	—	5.5	7.0	—	4.5	6.0	dB	
Upper-limit operating frequency	f_u	−3 dB from gain flat	1600	1900	—	1000	1200	—	MHz	
Isolation	ISL	$f = 500$ MHz	21	25	—	24	28	—	dB	
Input return loss	RL_{in}	$f = 500$ MHz	9	12	—	9	12	—	dB	
Output return loss	RL_{out}	$f = 500$ MHz	8	11	—	6	9	—	dB	
Output power	P_o	$f = 500$ MHz, $P_{in} = 0$ dBm	2	4	—	3	5	—	dBm	

Figures 6 through 11 and Figures 12 through 17 show the characteristic curves including the voltage characteristics and temperature characteristics of the μ PC1675G and μ PC1676G. Figure 18 shows the impedance characteristics (Smith chart).

Figure 6. G_P , NF vs. f Characteristics of μ PC1675G

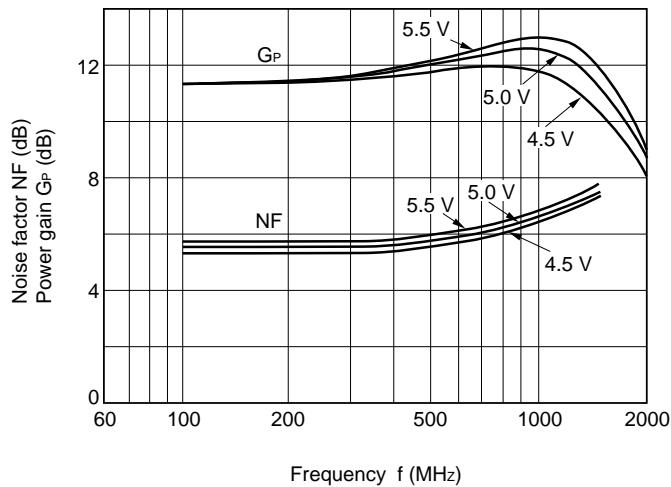


Figure 7. Isolation vs. f Characteristics of μ PC1675G

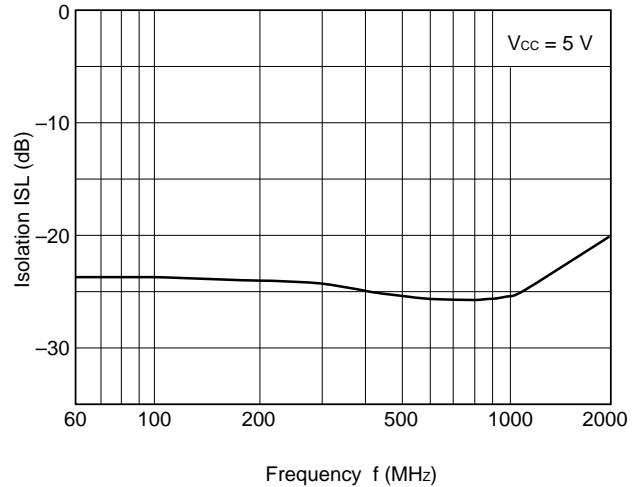


Figure 8. Return Loss vs. f Characteristics of μ PC1675G

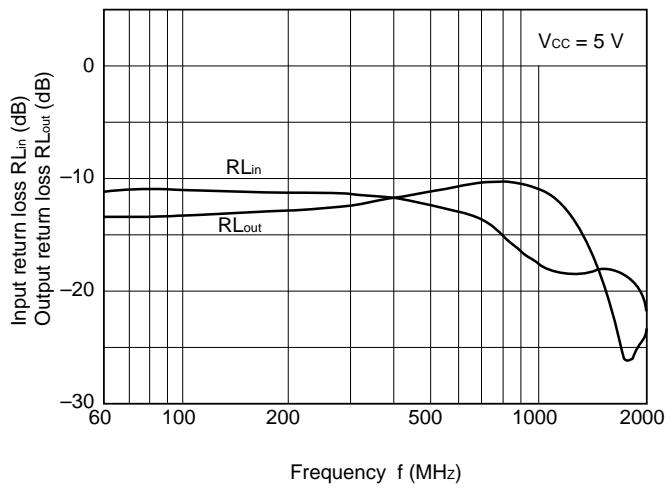


Figure 9. Input/Output Characteristics of μ PC1675G

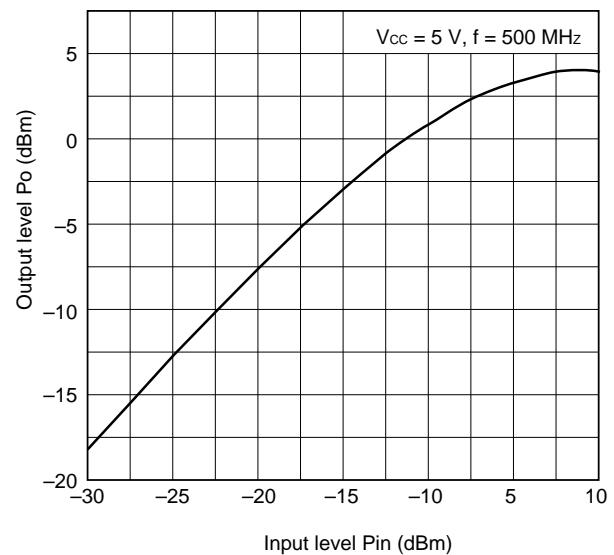


Figure 10. IM₃ Characteristics of μ PC1675G

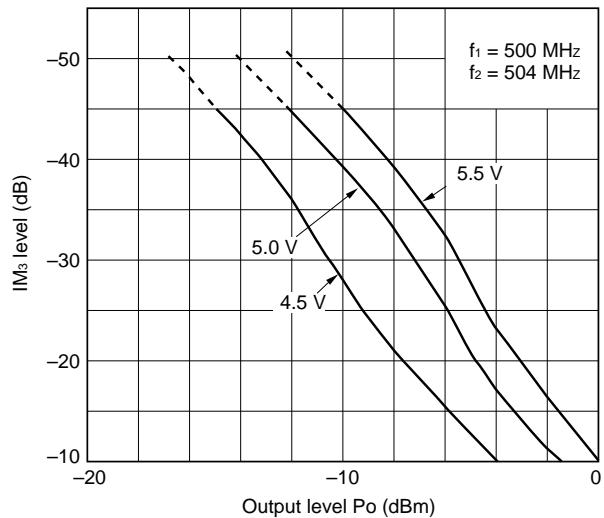


Figure 11. G_P vs. Temperature Characteristics of μ PC1675G

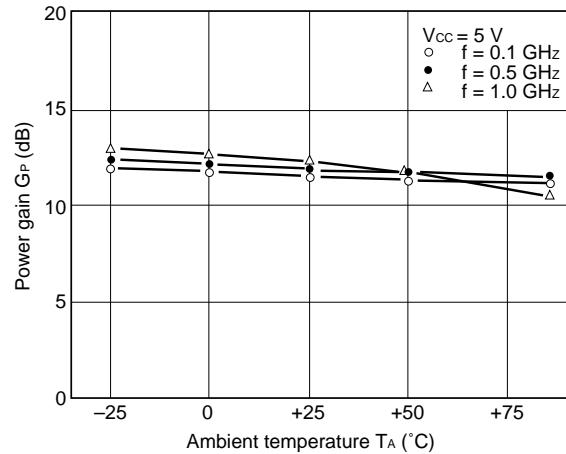


Figure 12. G_P, NF vs. f Characteristics of μ PC1676G

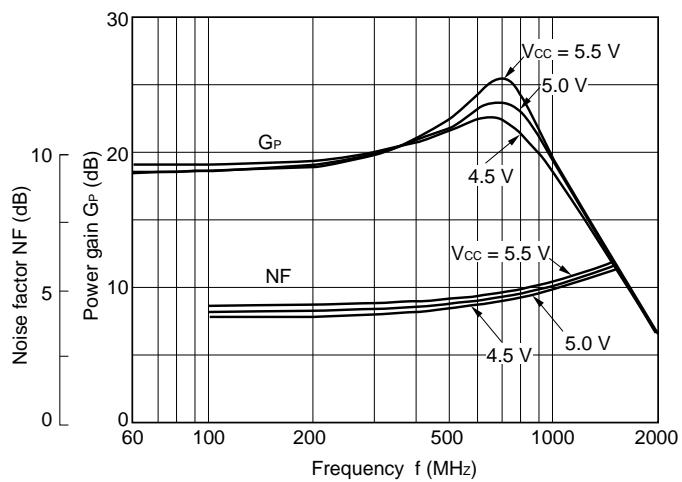


Figure 13. Isolation vs. f Characteristics of μ PC1676G

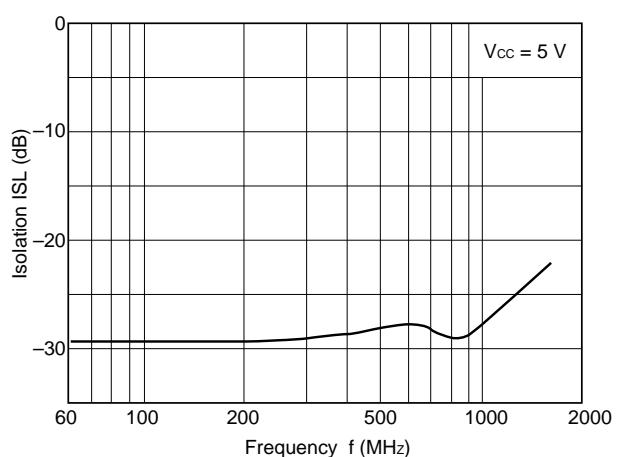


Figure 14. Return Loss vs. f Characteristics of μ PC1676G

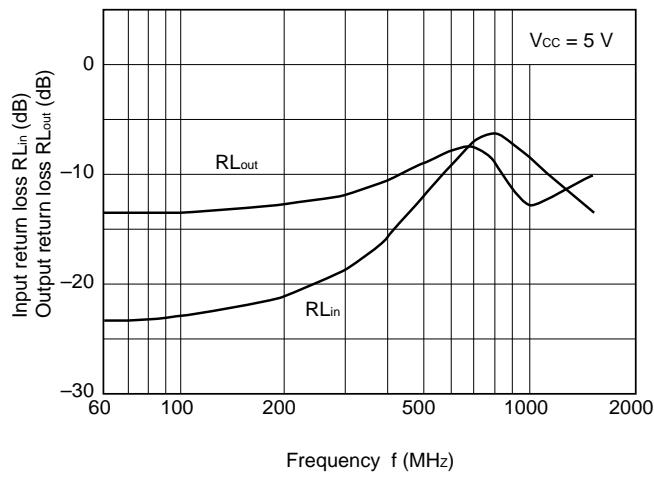


Figure 16. IM_3 Characteristics of μ PC1676G

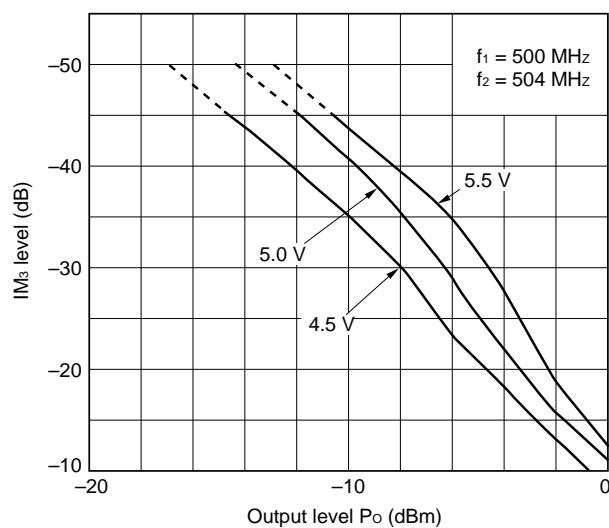


Figure 15. Input/Output Characteristics of μ PC1676G

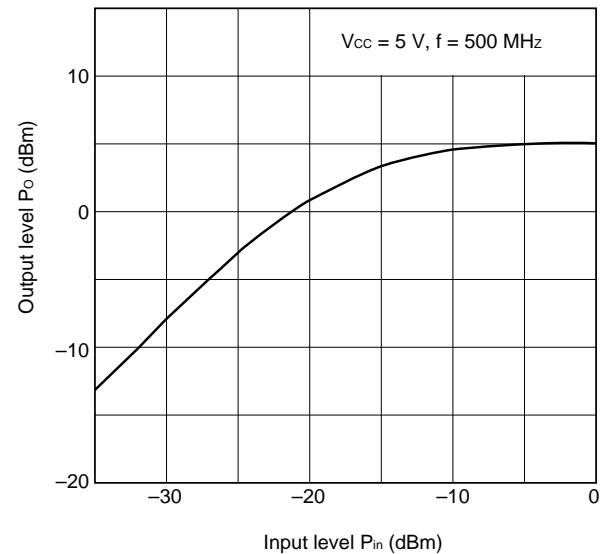


Figure 17. G_P Temperature Characteristics of μ PC1676G

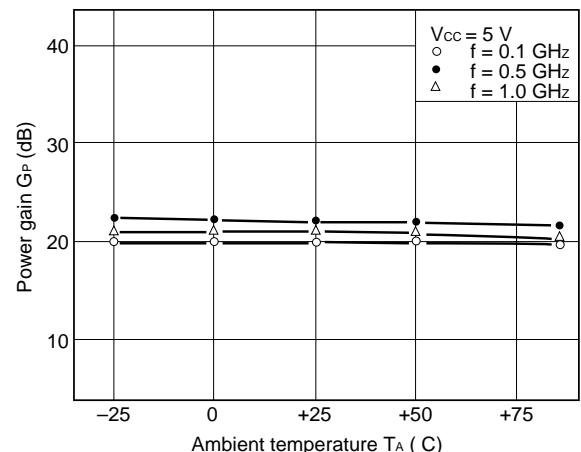


Figure 18 (a). S_{11} vs. f Characteristics of μ PC1675G

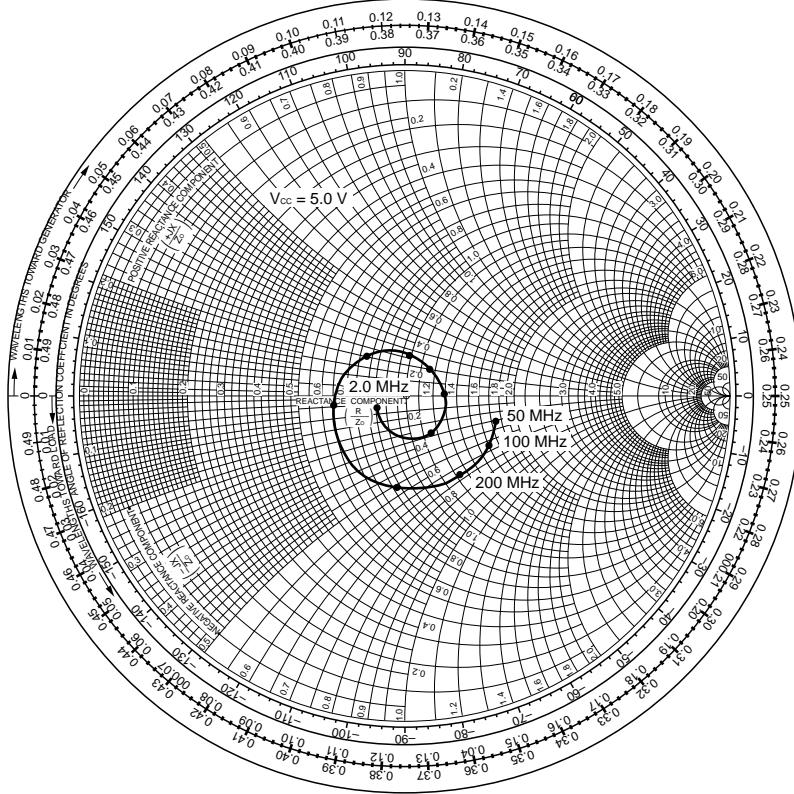


Figure 18 (b). S_{22} vs. f Characteristics of μ PC1675G

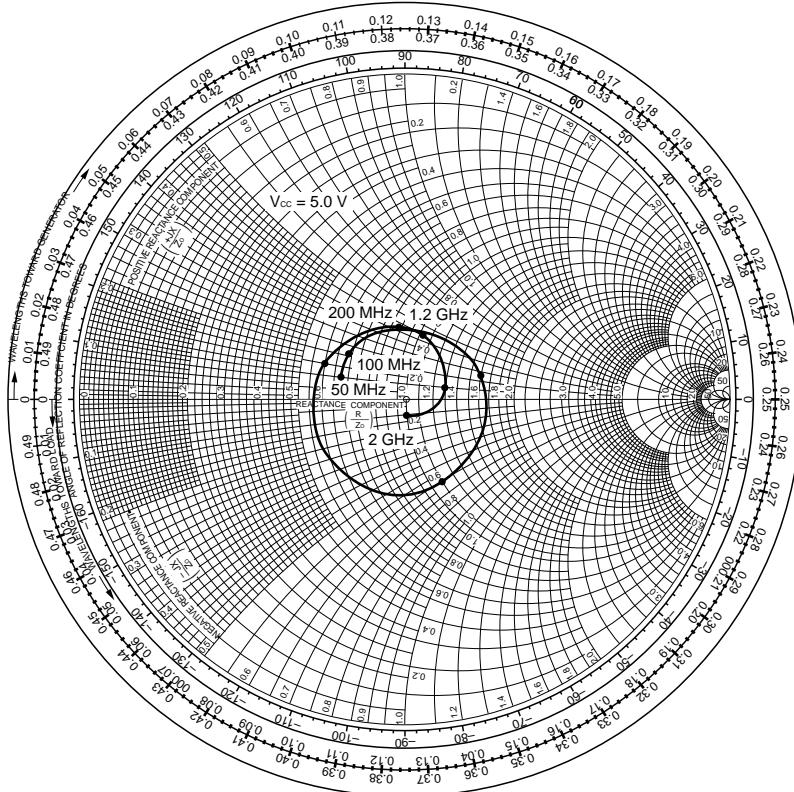


Figure 18 (c). S_{11} vs. f Characteristics of μ PC1676G


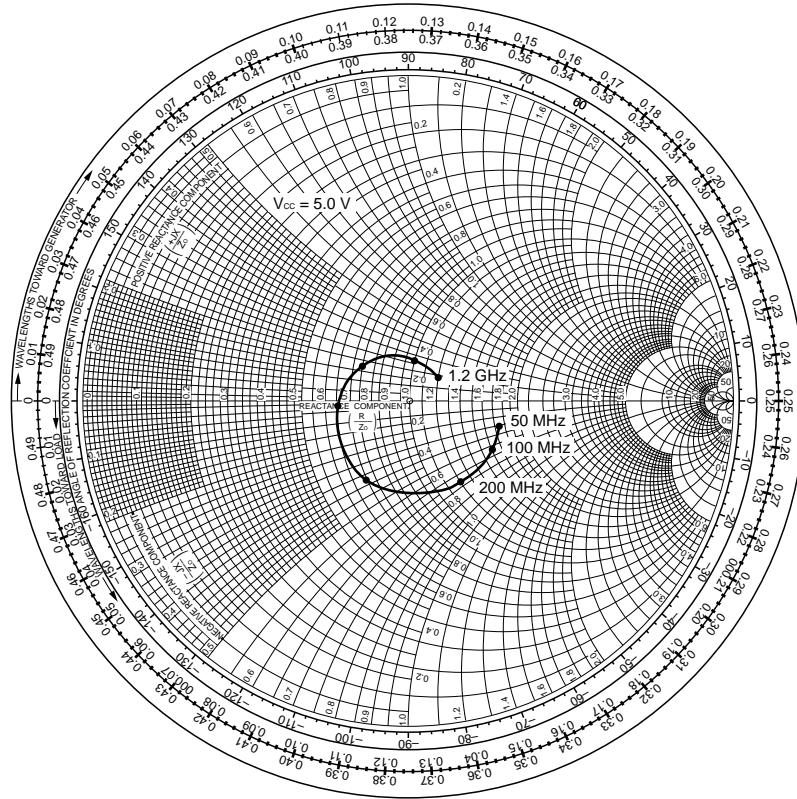


Figure 18 (d). S_{22} vs. f Characteristics of μ PC1676G

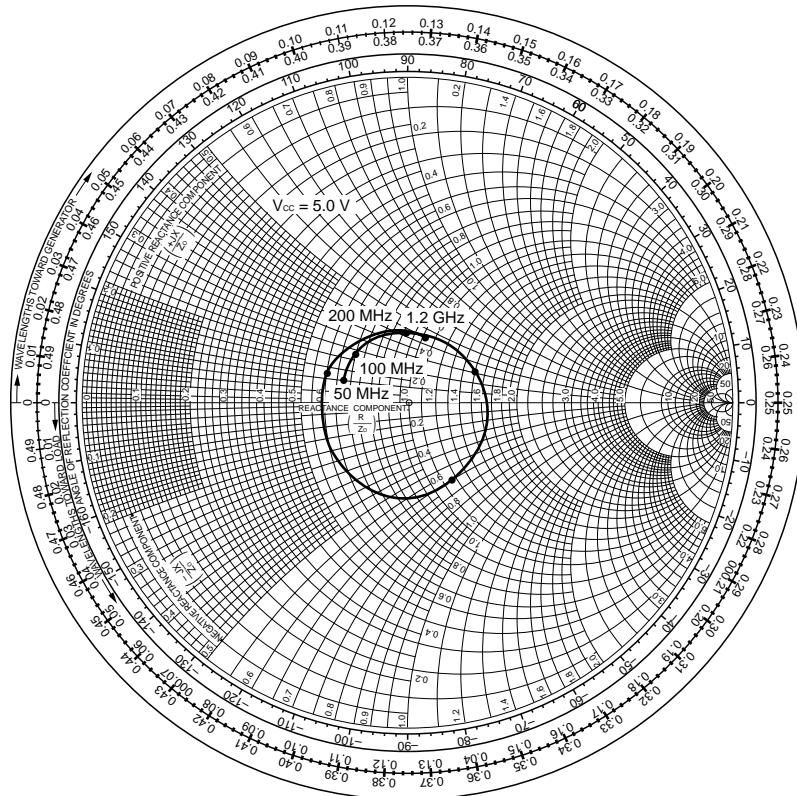

4. PRINTED PATTERN MOUNTING EXAMPLE

The μ PC1675G/ μ PC1676G/ μ PC1688G are wideband amplifiers of simple construction with only four pins: input, output, power, and GND.

Because the upper-limit operating frequency is as high as 1900 MHz TYP. in the case of μ PC1675G and 1200 MHz TYP. with the μ PC1676G, the frequency characteristics substantially vary depending on the conditions of the print pattern (especially at high frequencies).

Figure 19 shows these variations in the characteristics of the μ PC1675G. Print boards A, B, and C in this figure are:

Board A : Double-sided copper clad epoxy glass board with GND on the back and front surfaces connected, and a GND line inserted between input and output to provide an isolation effect.

Figure 20 shows an example pattern.

Board B : Board A without GND line between input and output.

Board C : Board B without GND on back side.

As shown in figure 19, a print board equivalent to A is necessary because of peaking in the vicinity of $f = 1$ GHz and an increase in the frequency characteristics. The GND line between input and output has an especially important effect. Board A is used to measure characteristics in Chapter 3.

Figure 19. Mounting Characteristics Example of μ PC1675G ($G_P = 13$ dB)

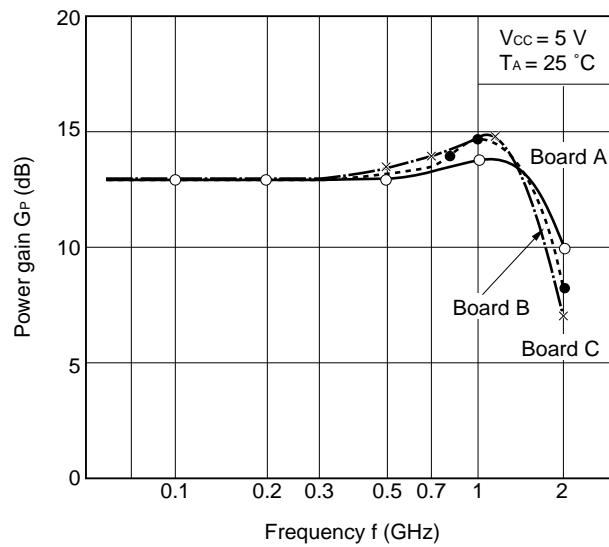


Figure 20 (a). Pattern Example (Top View)

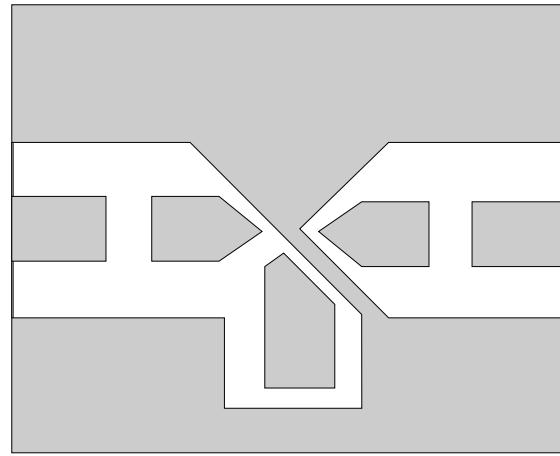


Figure 20 (b). Mounting Example (Top View)


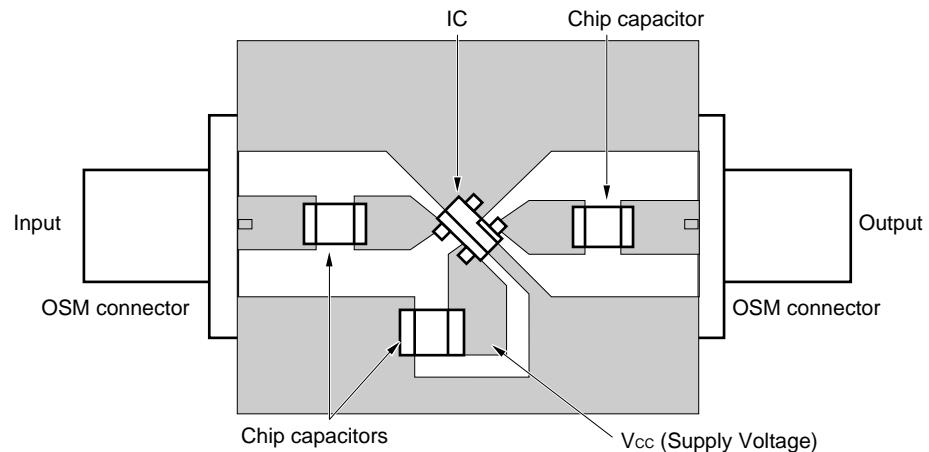


Figure 20 (c). Operation Circuit

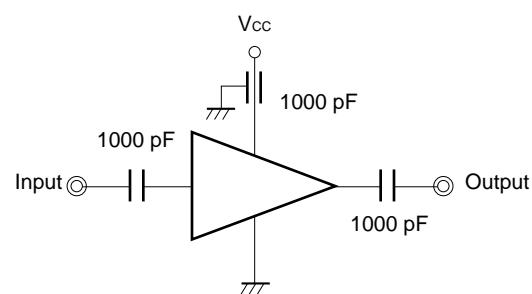

5. APPLICATION EXAMPLE


(1) Buffer amplifier for prescaler

The input sensitivity of 1-GHz-class prescalers used in UHF and VHF TV tuners has recently increased. Even so, a buffer amplifier is connected in the stage preceding these prescalers. The purpose of this is to decrease coupling with the local oscillation stage and to improve isolation after the oscillation stage and prescaler.

Figure 21 shows the sensitivity characteristics when NEC's μ PB568G 1-GHz prescaler is used, and Figure 22 shows a circuit example. As the load on the μ PC1675G/1676G, a 51- Ω resistor is connected to GND. Values of 50 to 200 Ω are suitable for this resistor. Because the saturation output of the μ PC1675G/1676G can be kept to 4 to 5 dBm, overload input to the prescaler can also be prevented (usually, a prescaler does not divide the frequency when an input higher than 8 to 10 dBm is applied).


As another local oscillation peripheral, the amplifier IC can also be used as a buffer amplifier to the MIX stage to prevent oscillation drift when a high input is applied to the antenna (Figure 22).

Figure 21. Input Sensitivity Characteristics of μ PC1675G/1676G + Prescaler μ PB568G

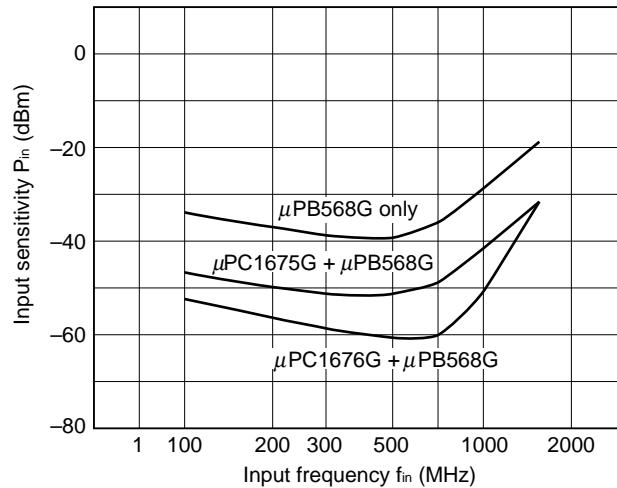

Note μ PB568G has been discontinued.

Figure 22. Prescaler Buffer Amplifier

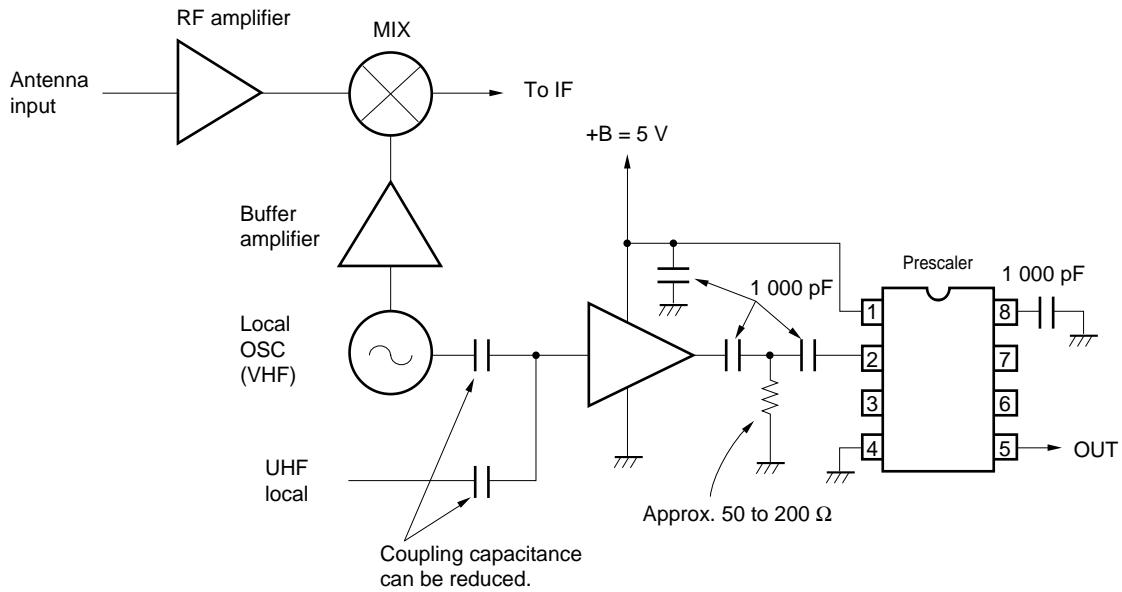

(2) Cascade amplifier

The input/output impedance of the μ PC1675G/1676G/1688G is matched to 50Ω so that multiple amplifier ICs can be connected.


Therefore, the amplifier ICs can be used as a cascade amplifier.

Figure 23 shows an example of the characteristics of two μ PC1675Gs connected in cascade. For the print pattern, a double-sided copper clad epoxy glass board is used as described in Chapter 4, and the input and output are isolated by the GND line.

The μ PC1676G is a high-gain type IC. However, because of peaking at $f = 700$ MHz, the targeted characteristics must be considered of the combination.

As a combination to produce output $P_o \approx 10$ dBm, use the μ PC1675G + μ PC1658G.

Figure 23. Cascade Amplifier Characteristics of Two μ PC1675Gs

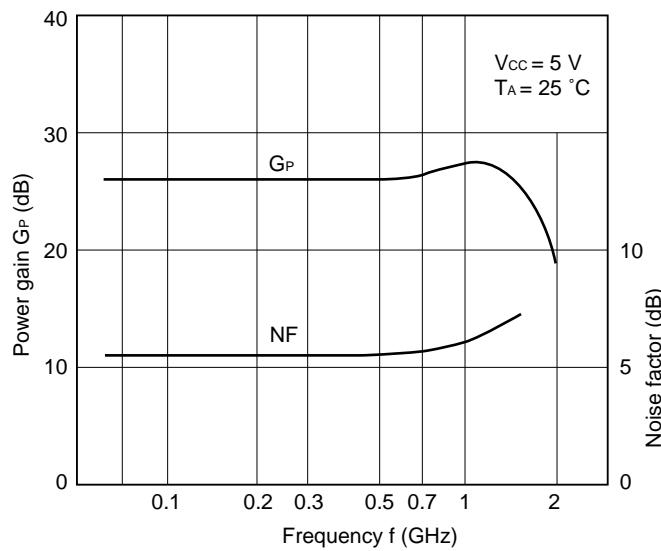

[MEMO]

Facsimile Message

From:

Name _____

Company _____

Tel. _____ FAX _____

Address _____

Although NEC has taken all possible steps to ensure that the documentation supplied to our customers is complete, bug free and up-to-date, we readily accept that errors may occur. Despite all the care and precautions we've taken, you may encounter problems in the documentation. Please complete this form whenever you'd like to report errors or suggest improvements to us.

Thank you for your kind support.

North America

NEC Electronics Inc.

Corporate Communications Dept.

Fax: +1-800-729-9288

Hong Kong, Philippines, Oceania

NEC Electronics Hong Kong Ltd.

Fax: +852-2886-9022/9044

Asian Nations except Philippines

NEC Electronics Singapore Pte. Ltd.

Fax: +65-250-3583

Europe

NEC Electronics (Europe) GmbH

Technical Documentation Dept.

Fax: +49-211-6503-274

Korea

NEC Electronics Hong Kong Ltd.

Seoul Branch

Fax: +82-2-551-0451

Japan

NEC Corporation

Semiconductor Solution Engineering Division

Technical Information Support Dept.

Fax: +81-44-548-7900

South America

NEC do Brasil S.A.

Fax: +55-11-889-1689

Taiwan

NEC Electronics Taiwan Ltd.

Fax: +886-2-719-5951

I would like to report the following error/make the following suggestion:

Document title: _____

Document number: _____ Page number: _____

If possible, please fax the referenced page or drawing.

Document Rating	Excellent	Good	Acceptable	Poor
Clarity	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Technical Accuracy	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Organization	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.