

- Complies with SPI-2 and SPI-3 Standards
- 2.75-V to 7-V Operation
- 1.8-pF Channel Capacitance during Disconnect
- 1- μ A Supply Current in Disconnect Mode
- 110- Ω /2.5-k Programmable Termination
- Completely Meets SCSI Hot Plugging
- -650-mA Sourcing Current for Termination
- +400-mA Sinking Current for Active Negation Drivers
- Trimmed Termination Current to 4%
- Trimmed Impedance to 7%
- Current Limit and Thermal Shutdown Protection

description


The UCC5611 provides 18 lines of active termination for a SCSI (Small Computer Systems Interface) parallel bus. The SCSI standard recommends active termination at both ends of the cable segment.

The UCC5611 is ideal for high performance 3.3-V SCSI systems. The key features contributing to such low-operating voltage are the 0.1-V drop-out regulator and the 2.75-V reference. During disconnect the supply current is typically only 1 μ A, which makes the IC attractive for battery powered systems.

The UCC5611 is designed with an ultra-low channel capacitance of 1.8 pF, which eliminates effects on signal integrity from disconnected terminators at interim points on the bus.

The UCC5611 can be programmed for either a 110- Ω or 2.5-k Ω termination. The 110- Ω termination is used for standard SCSI bus lengths and the 2.5-k Ω termination is typically used in short bus applications. When driving the TTL compatible $\overline{\text{DISCNCT}}$ pin directly, the 110- Ω termination is connected when the $\overline{\text{DISCNCT}}$ pin is driven high, and disconnected when low. When the $\overline{\text{DISCNCT}}$ pin is driven through an impedance between 80 k Ω and 150 k Ω , the 2.5-k Ω termination is connected when the $\overline{\text{DISCNCT}}$ pin is driven high, and disconnected when driven low.

block diagram

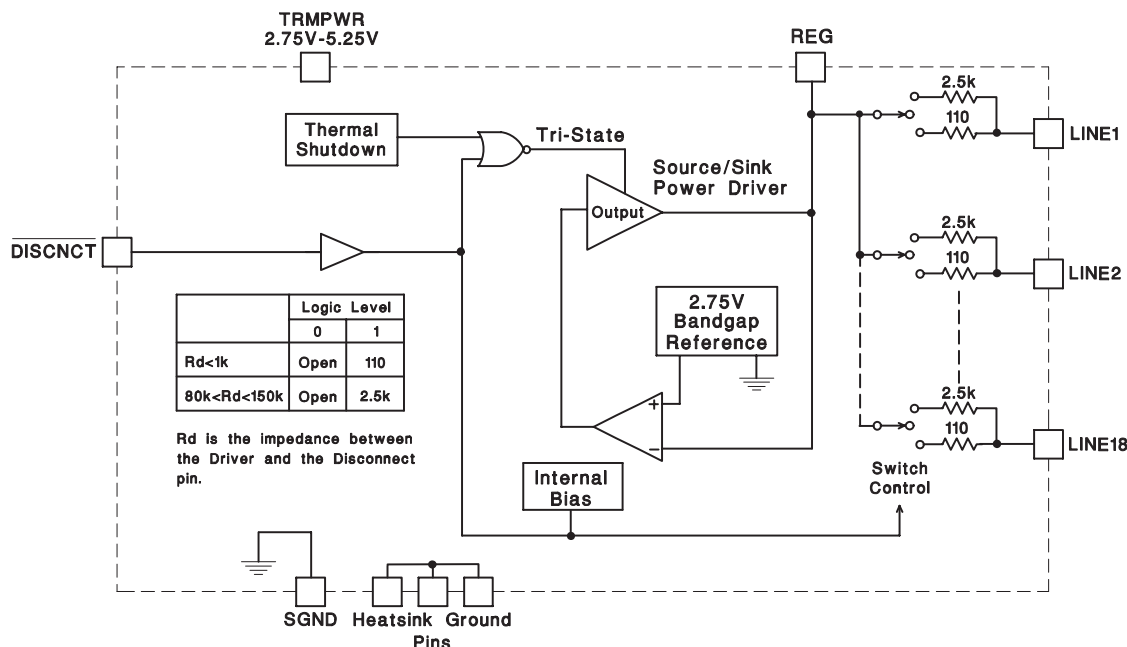

UDG-94131-1



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2000, Texas Instruments Incorporated

UCC5611
18-LINE 3-5 VOLT SCSI ACTIVE TERMINATOR,
REVERSE DISCONNECT

SLUS348A – MARCH 1997 – REVISED NOVEMBER 2000

description (continued)


The power amplifier output stage allows the UCC5611 to source full termination current and sink active negation current when all termination lines are actively negated.

The UCC5611 is pin for pin compatible with Texas Instrument's other 18-line SCSI terminators, except that DISCNCT is now active low, allowing lower capacitance and lower voltage upgrades to existing systems. The UCC5611, as with all of Texas Instrument terminators, is completely hot pluggable and appears as high impedance at the terminating channels with VTRMPWR = 0 V or open.

Internal circuit trimming is utilized, first to trim the 110-Ω termination impedance to a 7% tolerance, and then most importantly, to trim the output current to a 4% tolerance, which maximizes noise margin.

Other features include thermal shutdown and current limit.

This device is offered in low thermal resistance versions of the industry standard 28-pin wide body SOIC and 28-pin PLCC.

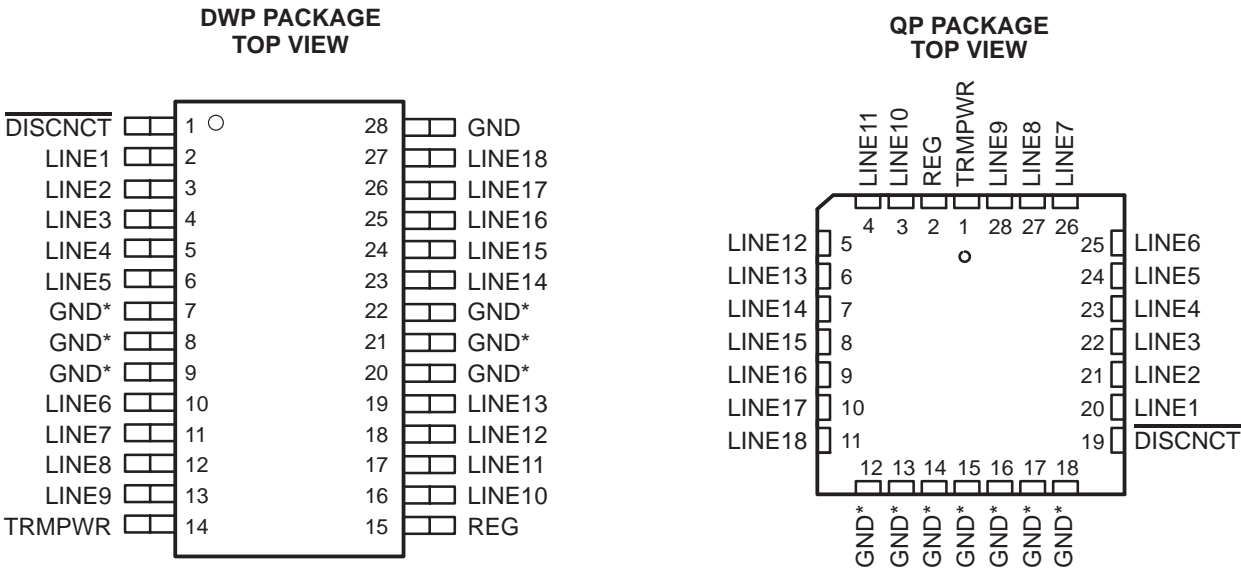

* DWP package pin 28 serves as signal ground; pins 7, 8, 9, 20, 21, 22 serve as heatsink/ground.
* QP package pins 12-18 serve as both heatsink and signal ground.

AVAILABLE OPTIONS

Table with 3 columns: TJ, PACKAGED DEVICES, SOIC (DWP), PLCC (QP). Rows include temperature range 0°C to 70°C and device models UCC5611DWP and UCC5611QP.

† Available tape and reeled. Add TR suffix to device type to order quantities of 1000 devices per reel.

UCC5611

18-LINE 3–5 VOLT SCSI ACTIVE TERMINATOR, REVERSE DISCONNECT

SLUS348A – MARCH 1997 – REVISED NOVEMBER 2000

absolute maximum ratings over operating free-air temperature (unless otherwise noted)[†]

Tempwr voltage	7 V
Signal line voltage	0 V to 7 V
Regulator output current	Self-regulating
Storage temperature, T_{stg}	–65°C to 150°C
Operating junction temperature, T_J	–55°C to 150°C
Lead temperature (soldering, 10 Sec.)	300°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

[‡] Unless otherwise specified all voltages are with respect to Ground. Currents are positive into, negative out of the specified terminal. Consult Packaging Section of Interface Products Data Book (TI Literature Number SLUD002) for thermal limitations and considerations of packages.

recommended operating conditions

Tempwr voltage	2.75 V to 5.25 V
Signal line voltage	0 V to 5 V
Disconnect input voltage	0 V to Tempwr

electrical characteristics, these specifications apply for $T_A = 0^\circ\text{C}$ to 70°C . $TRMPWR = 3.3\text{ V}$, $DISCNCT = 3.3\text{ V}$, $R_{DISCNCT} = 0\ \Omega$. $T_A = T_J$, (unless otherwise stated)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Supply Current Section					
Tempwr supply current	All termination lines = open		1	2	mA
	All termination lines = 0.2 V		415	435	mA
Power down mode	$\overline{DISCNCT} = 0\text{ V}$		0.5	5	μA
Output Section (110 Ω – Terminator Lines)					
Terminator impedance	See Note 4	102.3	110	117.7	Ω
Output high voltage	$TRMPWR = 3\text{ V}$, See Note 1	2.5	2.7	3.0	V
Max output current	$V_{LINE} = 0.2\text{ V}$, $T_J = 25^\circ\text{C}$	–25.4	–23	–22.1	mA
	$V_{LINE} = 0.2\text{ V}$	–25.4	–23	–21	mA
	$V_{LINE} = 0.2\text{ V}$, $TRMPWR = 3\text{ V}$, $T_J = 25^\circ\text{C}$, See Note 1	–25.4	–23	–20.2	mA
	$V_{LINE} = 0.2\text{ V}$, $TRMPWR = 3\text{ V}$, See Note 1	–25.4	–23	–19	mA
	$V_{LINE} = 0.5\text{ V}$			–22.4	mA
Output leakage	$\overline{DISCNCT} = 0\text{ V}$, $TRMPWR = 0\text{ V to } 5.25\text{ V}$		10	400	nA
Output capacitance	$\overline{DISCNCT} = 0\text{ V}$, DWP package, See Note 2, See Note 3		1.8	2.5	pF
Output Section (2.5 kΩ – Terminator Lines) ($R_{DISCNCT} = 80\text{ k}\Omega$)					
Terminator impedance		2	2.5	3	k Ω
Output high voltage	$TRMPWR = 3\text{ V}$, See Note 1	2.5	2.7	3.0	V
Max output current	$V_{LINE} = 0.2\text{ V}$	–1.4	–1	–0.7	mA
	$V_{LINE} = 0.2\text{ V}$, $TRMPWR = 3\text{ V}$, See Note 1	–1.5	–1	–0.6	mA
Output leakage	$\overline{DISCNCT} = 0\text{ V}$, $TRMPWR = 0\text{ to } 5.25\text{ V}$		10	400	nA
Output capacitance	$\overline{DISCNCT} = 0\text{ V}$, DWP package, See Note 2, See Note 3		1.8	2.5	pF

- NOTES: 1. Measuring each termination line while other 17 are low (0.2 V).
2. Ensured by design. Not production tested.
3. Output capacitance is measured at 0.5 V.
4. Tested by measuring I_{OUT} with $V_{OUT} = 0.2\text{ V}$ and $V_{OUT} = V_{REG} - 0.1\text{ V}$ then calculating the impedance.



UCC5611

18-LINE 3–5 VOLT SCSI ACTIVE TERMINATOR, REVERSE DISCONNECT


SLUS348A – MARCH 1997 – REVISED NOVEMBER 2000

electrical characteristics, these specifications apply for $T_A = 0^{\circ}\text{C}$ to 70°C . $\text{TRMPWR} = 3.3\text{ V}$, $\text{DISCNCT} = 3.3\text{ V}$, $R_{\text{DISCNCT}} = 0\ \Omega$. $T_A = T_J$, (unless otherwise stated)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Regulator Section					
Regulator output voltage	$5.25\text{ V} > \text{TRMPWR} > 3\text{ V}$	2.5	2.7	3.0	V
Drop out voltage	All termination lines = 0.2 V		0.1	0.2	V
Short circuit current	$V_{\text{REG}} = 0\text{ V}$	–800	–650	–450	mA
Sinking current capability	$V_{\text{REG}} = 3\text{ V}$	200	400	800	mA
Thermal shutdown	See Note 2		170		$^{\circ}\text{C}$
Thermal shutdown hysteresis	See Note 2		10		$^{\circ}\text{C}$
Disconnect Section					
Disconnect threshold	$R_{\text{DISCNCT}} = 0\ \& 80\text{ k}\Omega$	0.8	1.5	2.0	V
Input current	$\text{DISCNCT} = 3.3\text{ V}$		30	50	μA

NOTES: 2. Ensured by design. Not production tested.

APPLICATION INFORMATION

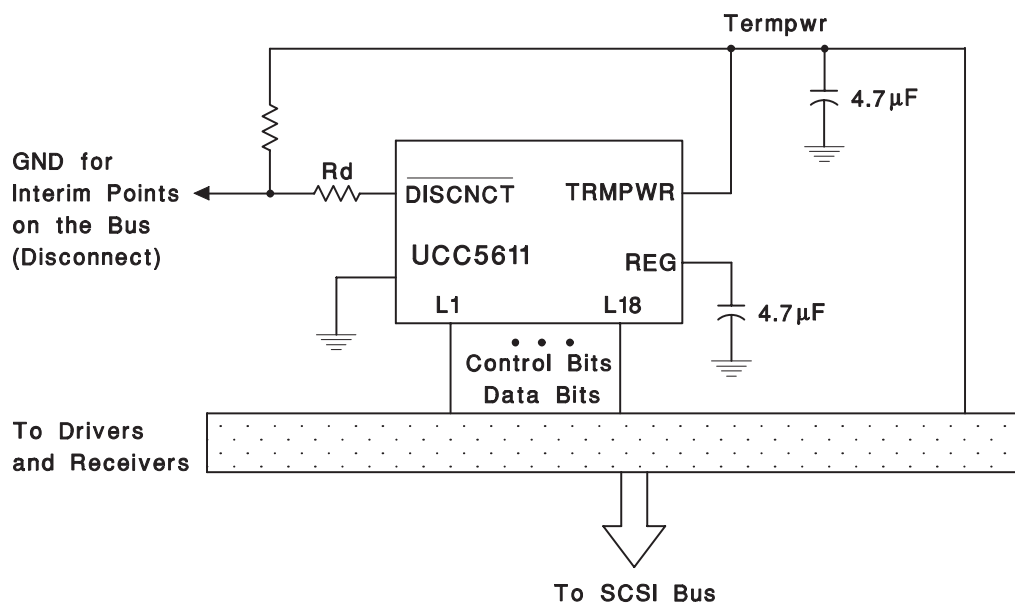

UDG-94132

Figure 1. Typical SCSI Bus Configurations Utilizing a UCC5611 Device

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.