

ULTRA LOW CAPACITANCE STEERING DIODE ARRAY

APPLICATIONS

- ✓ USB Interface Ports
- ✓ Cellular Phones
- ✓ Video
- ✓ Hand held Electronics
- ✓ Personal Computers

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns

FEATURES


- ✓ 225 Milliwatt Continuous Power Dissipation
- ✓ Protects 2 Lines
- ✓ **LOW STANDBY CURRENT < 1.0 μ A**
- ✓ **ULTRA LOW CAPACITANCE 3pF PER DIODE**

MECHANICAL CHARACTERISTICS


- ✓ Molded JEDEC SOT-143
- ✓ Weight 35 Milligrams (Approximate)
- ✓ Flammability rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481-1-A
- ✓ Device Marking: Marking Code, Logo & Pin One Defined By DOT on Top of Package

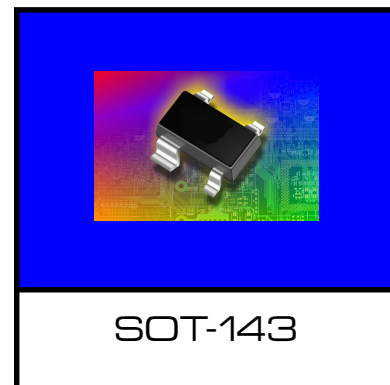

CIRCUIT DIAGRAM

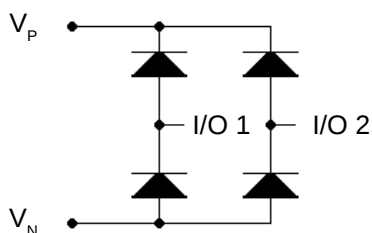

PIN CONFIGURATION

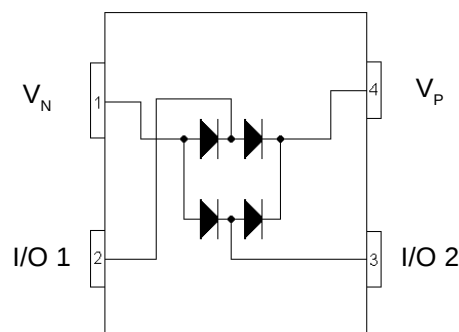

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C
Continuous Power Dissipation	P_{PC}	225	mW
Repetitive Peak Forward Current @ $t_p=5\mu s$, $F=50kHz$ (Pin 2 - 3)	I_{FRM}	700	mA

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified



PART NUMBER	DEVICE MARKING CODE	REPETITIVE PEAK PULSE VOLTAGE @ 10 μA (See Note 1) V_{RRM} VOLTS	MAXIMUM REVERSE LEAKAGE CURRENT (Note 2) @5V I_R μA	MAXIMUM DIODE FORWARD VOLTAGE @20mA V_F VOLTS	MAXIMUM CAPACITANCE (See Note 3 & 4) (Between Line and Ground) C pF
USB004	PSA	20	1	0.95	6

Note 1: $V_P - V_N = 20V$.

Note 2: $V_P - V_N = 5.5V$.

Note 3: $V_P = 5V$, $F = 1MHz$, $V_{IO} = 2.5V$, $V_N = 0V$

Note 4: Typical Input Capacitance at 3pF.

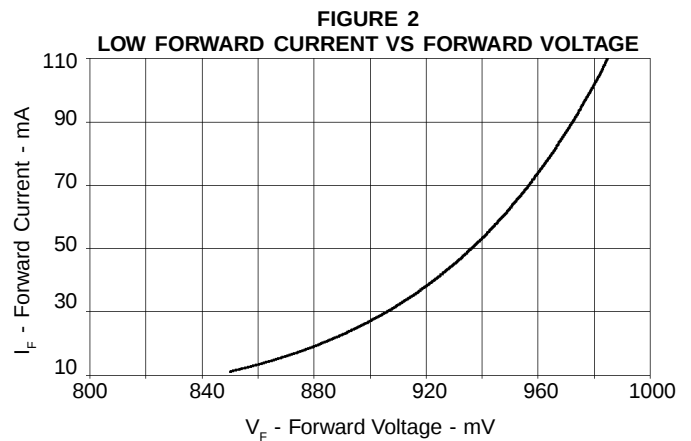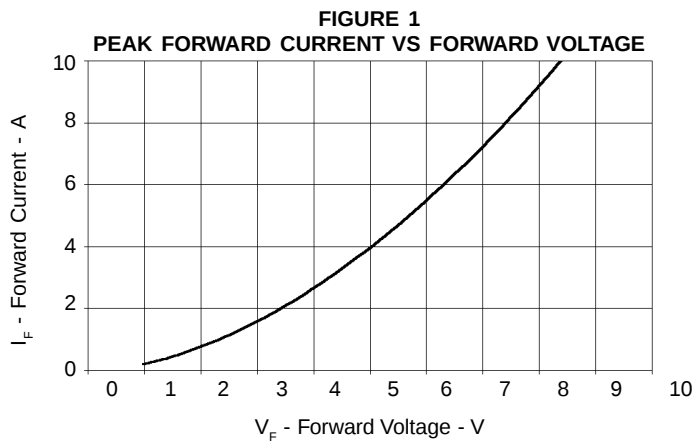

PACKAGE OUTLINE & DIMENSIONS

PACKAGE OUTLINE

Technical drawing of the SOT-143 package showing top, side, and end views with dimension labels A through S.

SOT-143

PACKAGE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.110	0.0120
B	1.20	1.39	0.047	0.055
C	0.84	1.14	0.033	0.045
D	0.39	0.50	0.015	0.020
F	0.79	0.93	0.031	0.037
G	1.78	2.03	0.070	0.080
H	0.013	0.10	0.0005	0.004
J	0.08	0.15	0.003	0.006
K	0.46	0.60	0.018	0.024
L	0.445	0.60	0.0175	0.024
R	0.72	0.83	0.028	0.033
S	2.11	2.48	0.083	0.098

MOUNTING PAD

TYPICAL		
DIM	Millimeters	Inches
1	2.85	0.112
2	2.00	0.079
3	1.80	0.071
4	1.90	0.075
5	1.05	0.041
6	2.75	0.108
7	1.20	0.047
8	0.80	0.031
9	0.85	0.033
10	0.85	0.033
11	0.85	0.033

Technical drawing of the mounting pad showing dimensions 1 through 11.

NOTES:

1. Dimensioning and tolerances per ANSI Y14.5M, 1985.
2. Controlling Dimension: Inches
3. Dimensions are exclusive of mold flash and metal burrs.

06011 Rev 1 - 11/01

TAPE & REEL PACKAGING:

Surface mount product is taped and reeled in accordance with EIA-481-1-A, reel quantities and sizes are as follows:

7 Inch Reel - 3,000 pieces per reel; 13 Inch Reel - Not Available

Protek Devices

2929 South Fair Lane, Tempe, AZ 85282

Tel: 602-431-8101 Fax: 602-431-2288

E-Mail: sales@protekdevices.com

Web Site: www.protekdevices.com

COPYRIGHT © ProTek Devices 2001

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.