

# Secondary Side Average Current Mode Controller

## FEATURES

- Practical Secondary Side Control of Isolated Power Supplies
- Provides a Self Regulating Bias Supply From a High Input Voltage Using an External N-Channel Depletion Mode FET
- Onboard Precision, Fixed Gain, Differential Current Sense Amplifier
- Wide Bandwidth Current Error Amplifier
- 5V Reference
- High Current, Programmable Gm Amplifier Optimized to Drive Opto-couplers

## DESCRIPTION


The UCC3839 provides the control functions for secondary side average current mode control in isolated power supplies. Start up, pulse width modulation and MOSFET drive must be accomplished independently on the primary side. Communication from secondary to primary side is anticipated through an opto-isolator.

Accordingly, the UCC3839 contains a fixed gain current sense amplifier, voltage and current error amplifiers, and a Gm type buffer/driver amplifier for the opto-isolator. Additional housekeeping functions include a precision 5V reference and a bias supply regulator.

Power for the UCC3839 can be generated by peak rectifying the voltage of the secondary winding of the isolation transformer. From this unregulated voltage, the UCC3839's bias supply regulator will generate its own 7.5V bias supply using an external, N-channel, depletion mode FET.

The UCC3839 can be configured for traditional average current mode control where the output of the voltage error amplifier commands the current error amplifier. It can also be configured for output voltage regulation with average current mode short circuit current limiting, employing two parallel control loops regulating the output voltage and output current independently.

## BLOCK DIAGRAM

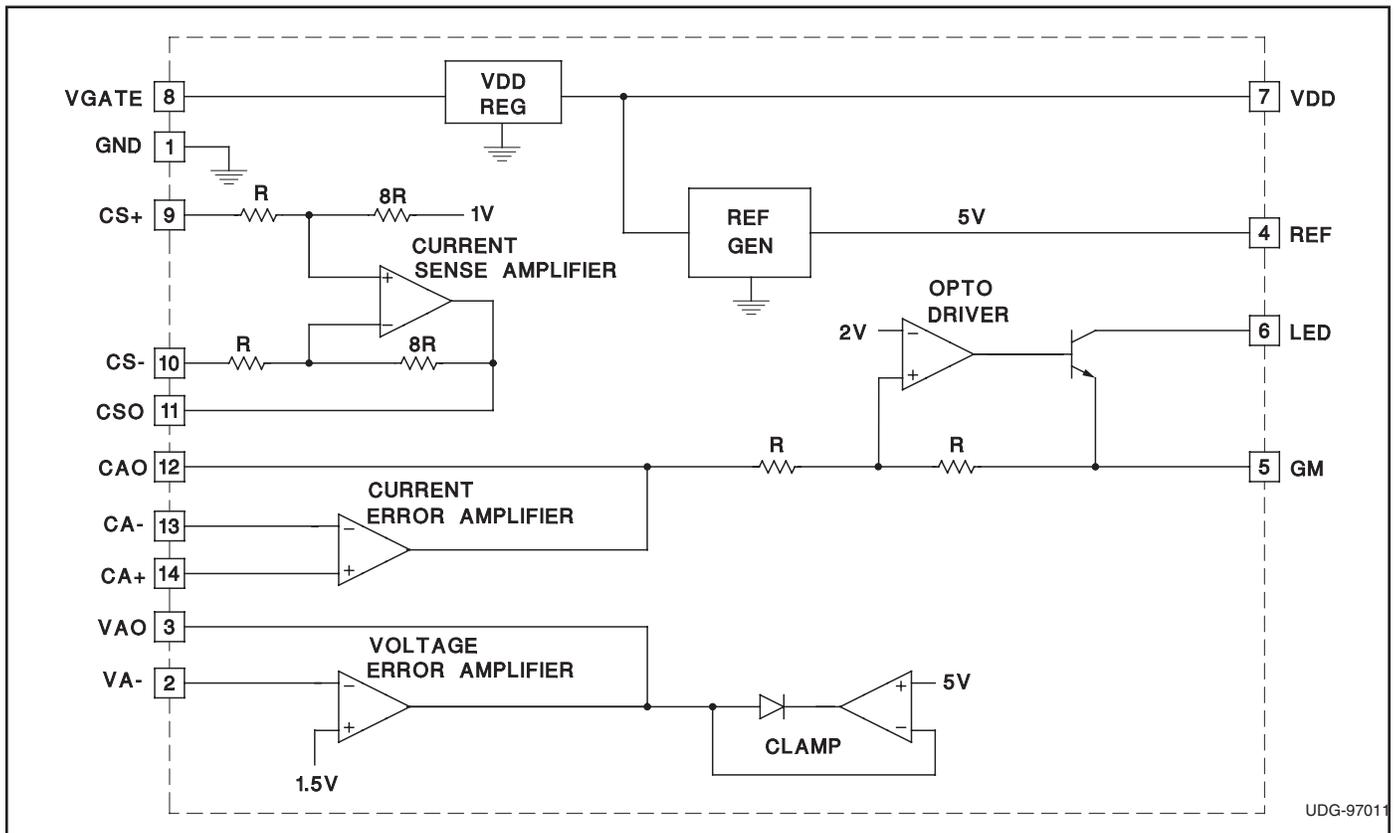


### ABSOLUTE MAXIMUM RATINGS

Supply Voltage	15V
Supply Current	
(LED not connected)	2mA
(LED connected)	14mA
Analog Inputs	-0.3V to 15V
Power Dissipation at TA = 60°C	
(LED not connected)	20mW
(LED connected)	55mW
Storage Temperature	-65°C to +150°C
Junction Temperature	-55°C to +150°C
Lead Temperature (Soldering, 10sec.)	+300°C

Currents are positive into, negative out of the specified terminal.  
Consult Packaging Section of Databook for thermal limitations and considerations of package.

### CONNECTION DIAGRAMS

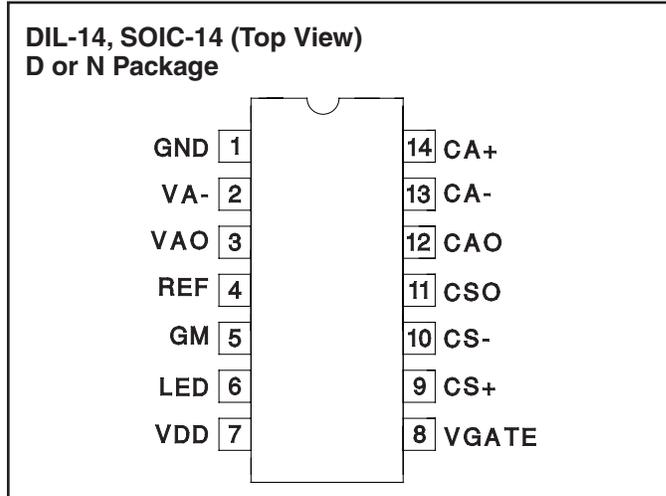

**ELECTRICAL CHARACTERISTICS:** Unless otherwise specified, 0°C to 70°C for the UCC3839, -40°C to 85° for the UCC2839. V<sub>LINE</sub> = 10V, R<sub>G</sub> = 400Ω. T<sub>A</sub> = T<sub>J</sub>.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
<b>Current Error Amplifier</b>					
V <sub>IO</sub>				10	mV
AV <sub>OL</sub>		60			dB
CMRR	V <sub>CM</sub> = 0.5V to 5.5V	60			dB
PSRR	V <sub>LINE</sub> = 10V to 20V	60			dB
CAO High	CA- = 1V, CA+ = 1.1V, I <sub>CAO</sub> = -100μA	4.8		7	V
I <sub>CAO</sub>	CA- = 1V, CA+ = 1.1V, CAO = 0.5V	-500		-250	μA
CAO Low	CA- = 1V, CA+ = 0.9V, I <sub>CAO</sub> = 500μA		0.2	0.4	V
GBW	F = 100kHz, T <sub>A</sub> = 25°C	3	5		MHz
<b>Voltage Error Amplifier</b>					
VA-		1.46	1.5	1.525	V
AV <sub>OL</sub>		60			dB
PSRR	V <sub>LINE</sub> = 10V to 20V	60			dB
VAO High	I <sub>VAO</sub> = -100μA to 100μA	4.8	5	5.2	V
I <sub>VAO</sub>	VA- = 1.45V, VAO = 0.5V	-500		-250	μA
VAO Low	VA- = 1.55V, VAO = 0.5V, I <sub>VAO</sub> = 500μA		0.2	0.4	V
GBW	(Note 1)	3	5		MHz
<b>Current Sense Amplifier</b>					
CSO Zero	CS+ = CS- = -0.3V to 5.5V, I <sub>CSO</sub> = -100μA to 100μA	0.85	1	1.15	V
AV	CS+ = 0, CS- = 0mV to -200mV	7.75	8	8.2	V/V
<b>Current Sense Amplifier (cont.)</b>					
Slew Rate	CS+ = 0, CS- = 0mV to -0.5V	2	4		V/μs
CSO	CS+ = -200mV, CS- = -700mV	4.75	5	5.2	V
<b>LED Driver</b>					
I <sub>LED</sub>	LED = 5.5V, CA- = 1V, CA+ = 1.1V, R <sub>G</sub> = 400		0	10	μA
	LED = 5.5V, CA- = 1V, CA+ = 0.9V, R <sub>G</sub> = 400	9	10	11	mA
G <sub>m</sub>	LED = 5.5V, CAO = 1V to 3V, R <sub>G</sub> = 400	2.25	2.5	2.75	mS
Slew Rate	CAO = 2V to 2.5V, LED = 400Ω to 5.5V, R <sub>G</sub> = 400	1	4		V/μs

**ELECTRICAL CHARACTERISTICS:** Unless otherwise specified, 0°C to 70°C for the UCC3839, –40°C to 85° for the UCC2839.  $V_{LINE} = 10V$ ,  $R_G = 400\Omega$ .  $T_A = T_J$ .

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
<b>Precision Reference</b>					
REF	$T_J = 25^\circ C$	4.94	5	5.06	V
	$I_{REF} = 0mA \text{ to } 1mA$ , $V_{LINE} = 10V \text{ to } 20V$	4.9		5.1	V
VA+/REF		0.298	0.3	0.302	V/V
<b>VDD Regulator</b>					
VDD	$I_{DD} = 0mA \text{ to } -15mA$ , $V_{LINE} = 10V \text{ to } 40V$	7	7.5	8	V
I <sub>VDD</sub>	$V_{LINE} = 10V \text{ to } 40V$ , $CA- = 0V$ , $CA+ = 1V$ , $VA- = 2.9V$ , $CS+ = CS- = 0$ , $I_{REF} = 0$		1.3	2	mA

Note 1: Ensured by design. Not 100% tested in production.

## PIN DESCRIPTIONS

**CA–:** Current Error Amplifier Negative Input.

**CAO:** Current Error Amplifier Output. Output source current is limited, and output sink current is guaranteed to be greater than the VAO output source current. Current loop compensation components are generally connected to CAO and CA–.

**CA+:** Current Error Amplifier Positive Input.

**CS–:** Current Sense Amplifier Negative Input.

**CSO:** Current Sense Amplifier Output. Internally set gain  $V_{OUT}/V_{IN} = 8$   $V_{IN} = 0V$  results in  $CSO = 1V$ .

**CS+:** Current Sense Amplifier Positive Input.

**GM:** Gm (transconductance) Programming Pin. Resistor  $R_{GM} = 400\Omega$  to GND.

**GND:** Chip Ground.

**LED:** Output of LED Driver. Connect LED from VDD pin to LED.

**REF:** 5V Precision Reference Buffer Output. Minimum Decoupling Capacitance = 0.01 $\mu$ F

**VA–:** Voltage Error Amplifier Negative Input. Voltage Error Amplifier is internally referenced to 1.5V

**VAO:** Voltage Error Amplifier Output. In a two loop average current mode control configuration, VAO is connected to CA+ and is the current command signal. VAO is internally clamped not to exceed 5V for short circuit control. In a single loop voltage mode control configuration with a parallel average short circuit current control loop, VAO is connected directly to CAO. Output source current is limited, and output sink current is guaranteed to be greater than the CAO output source current.

**VDD:** 7.5V Regulator output. Supply for most of the chip. Minimum Decoupling Capacitance = 0.01 $\mu$ F

**VGATE:** External FET Gate Control Voltage.

## APPLICATION INFORMATION

Fig. 1 shows a typical secondary side average current mode controller configuration using the UCC3839. In this configuration, output voltage is sensed and regulated by the voltage error amplifier. Its output, VAO provides the reference for the current error amplifier at the CA+ pin. VAO can be connected to CA+ directly or through a resistive divider depending on the particular application requirements.

Average current mode control needs accurate output current information which is provided by a low value current sense resistor. The voltage proportional to the converter's output current is sensed and amplified by the

precision current sense amplifier of the chip. The onboard current sense amplifier has a gain of 8 and is intended for differential sensing of the shunt voltage with a common mode voltage range from 0V up to 5V. The output of the current sense amplifier, CSO is 1V for zero input which guarantees that the circuit can control currents down to 0A.

The CSO signal is fed to the CA– input of the current error amplifier through a resistor. The current error amplifier takes the VAO and CSO signals and generates the error signal for the pulse width modulator.

**APPLICATION INFORMATION (cont.)**

Since the PWM function is located on the primary side of the power converter the CAO signal must be sent across the safety isolation boundary. The UCC3839 anticipates an opto-coupler to provide isolation between primary and secondary. Therefore, CAO drives a transconductance amplifier that controls LED current in an opto-isolator. During start up and when CAO exceeds 4V, the current in the LED drops to zero. Maximum LED current is obtained during normal operation as CAO reaches its lowest potential. Its value is determined by the programming resistor value from the GM pin to circuit GND.

An alternative secondary side controller configuration is introduced in Fig. 2. In this circuit, the voltage and current control loops of the UCC3839 are connected parallel. It can be achieved by connecting the VAO and CAO pins together. The error amplifier with the lower output voltage

controls the current in the opto-coupler providing the feedback signal for the PWM section on the primary side. Voltage regulation is still maintained by the voltage error amplifier until a user programmable output current is reached. At this time CAO will take control over the Gm amplifier and the output current of the converter will be regulated while the output voltage falls below its nominal value. This current level is set at the CA+ input by a resistive divider from the 5V reference of the chip.

Since the chip is powered from a peak rectifier which maintains the bias supply for the UCC3839 even under short circuit conditions, both of these techniques can be used to eliminate the short circuit runaway problem in isolated power supplies using peak current mode control on the primary side.


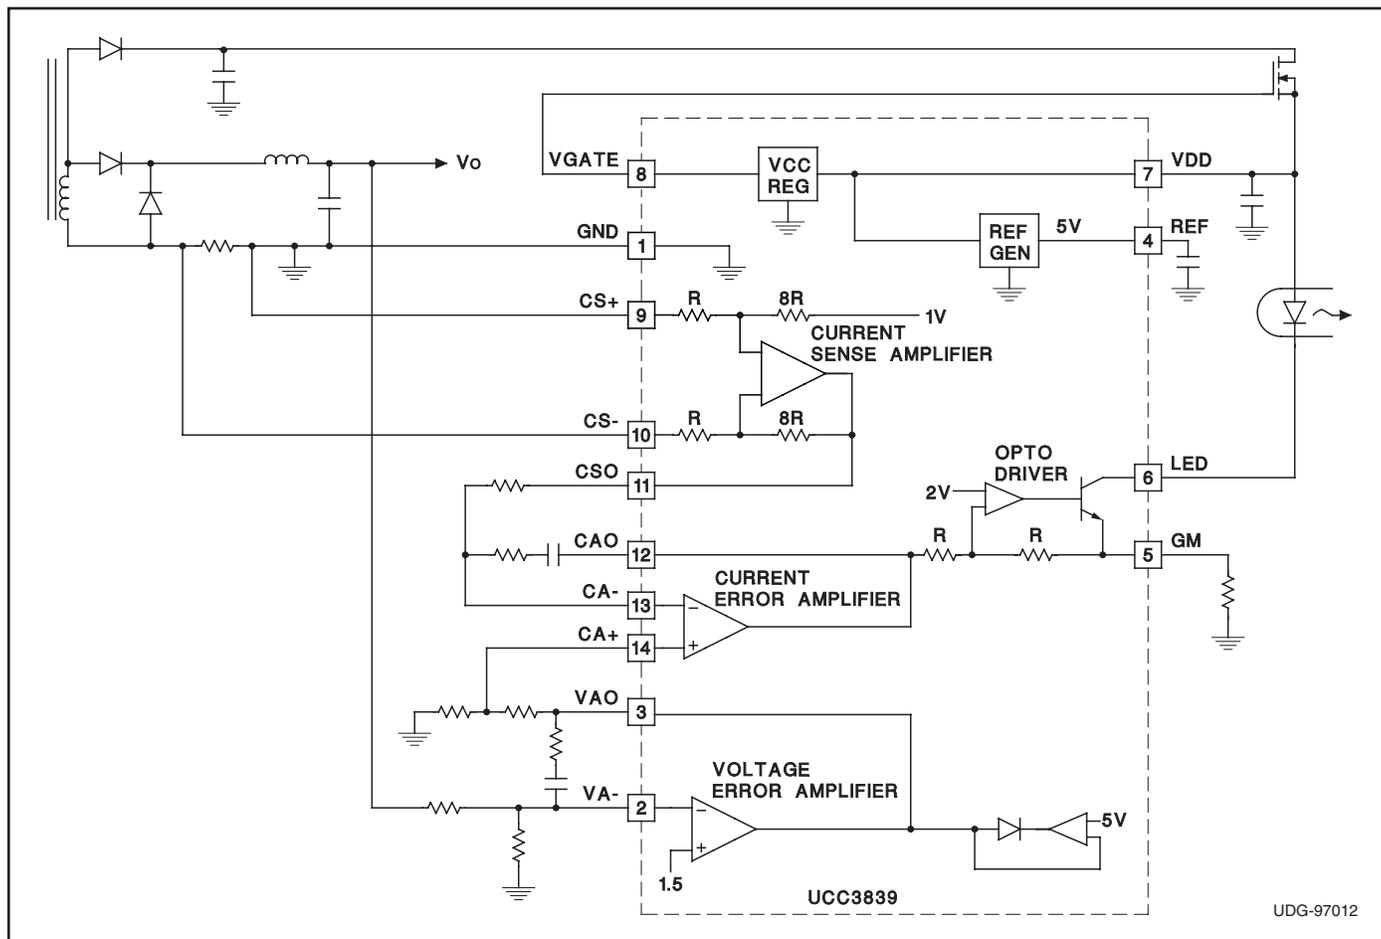



Figure 1. Secondary side average current mode controller.

APPLICATION INFORMATION (cont.)

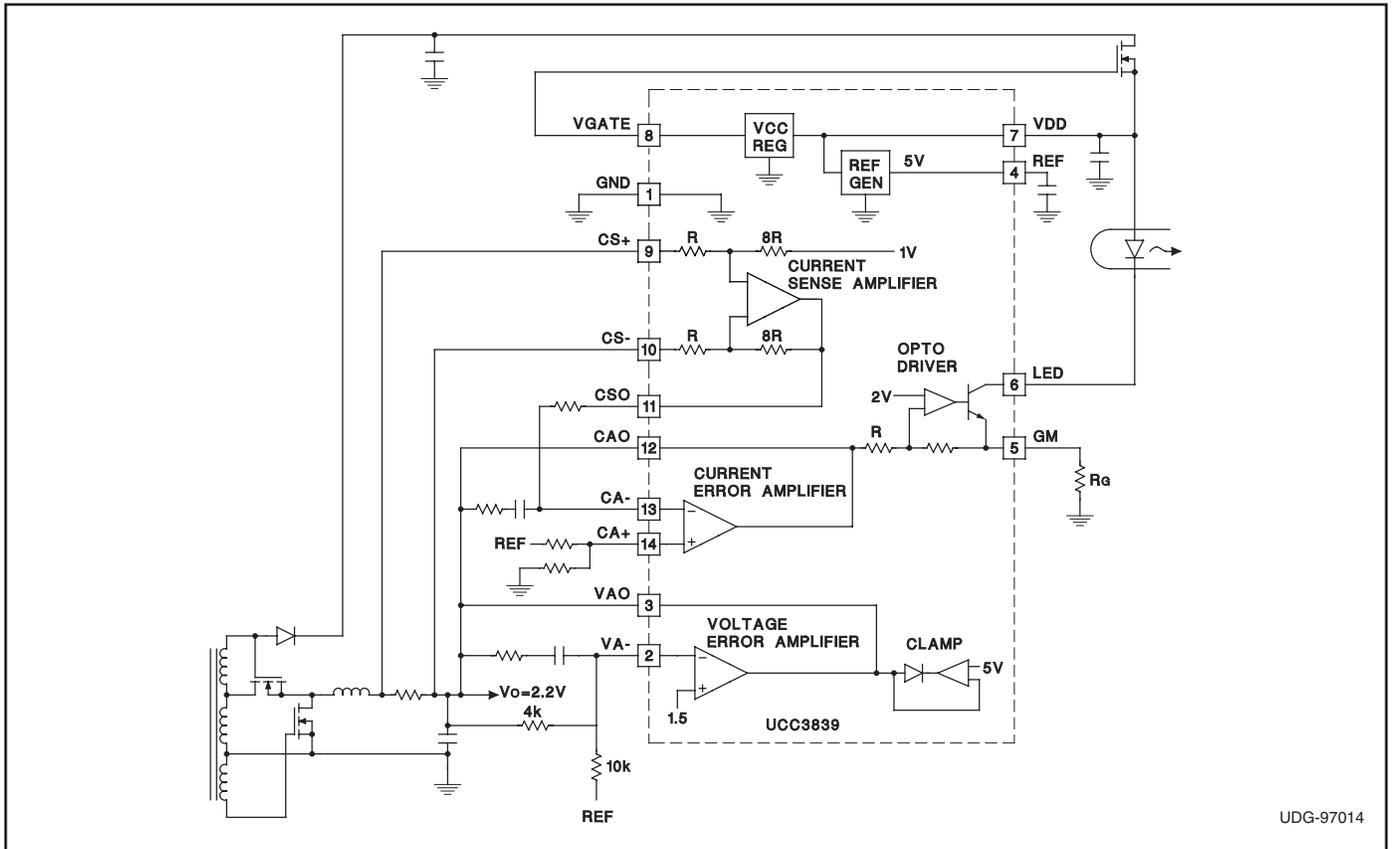

UDG-97014

Figure 2. Voltage mode with average current short circuit limit.

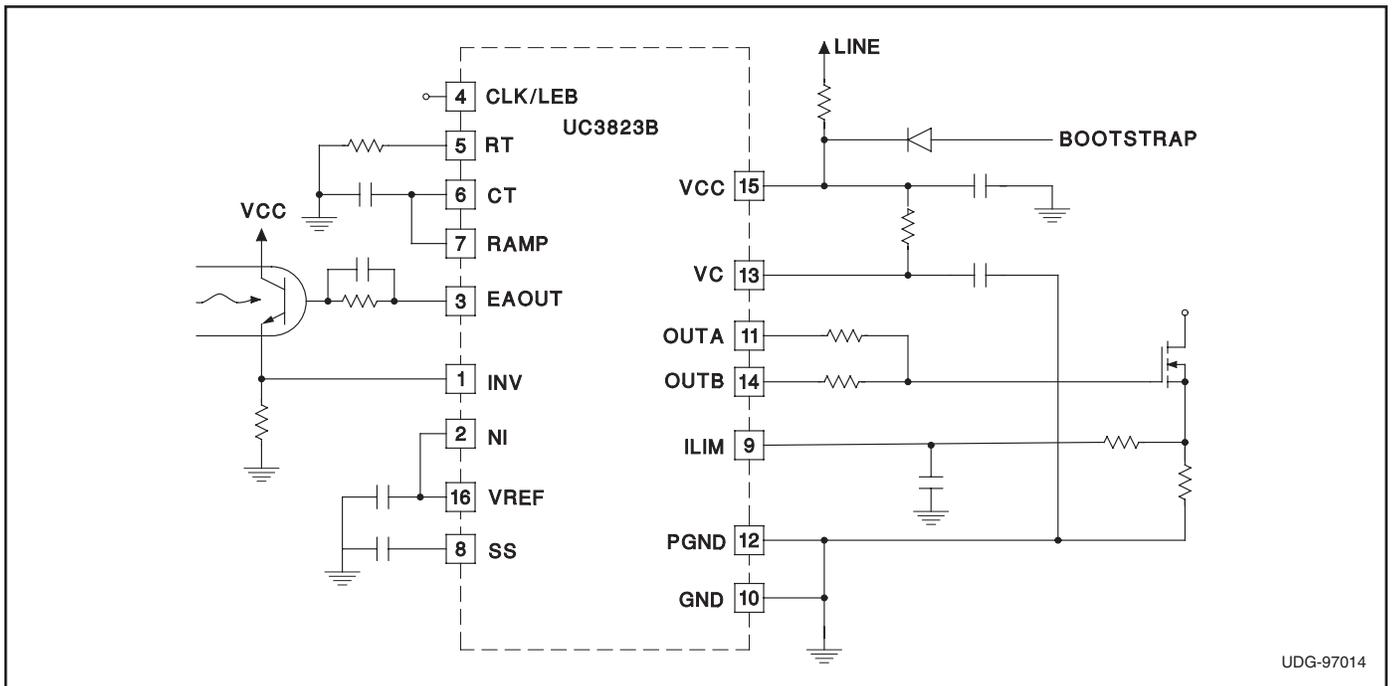

UDG-97014

Figure 3. Typical primary side circuit for use with secondary side average current mode controller.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

### Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265