


# 30 Amp Ultra Fast Recovery Rectifier UF3010 — UF3020

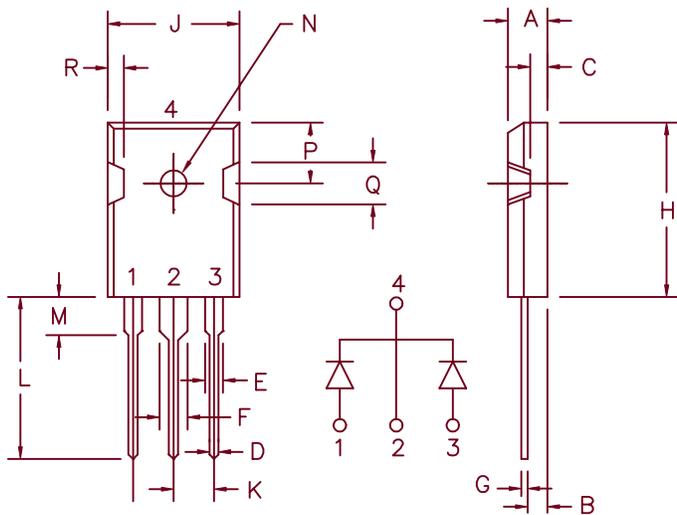

Similar to TO-247AD

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	.118	.133	3.00	3.38	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.215	—	5.46	—	Typ.
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog  
Number

UF3010  
UF3015  
UF3020

Repetitive Peak  
Reverse Voltage

100V  
150V  
200V

Transient Peak  
Reverse Voltage

100V  
150V  
200V

- Ultra Fast Recovery Rectifier
- 2 x 15 Amp current rating
- trr 30nS maximum
- Non isolated base
- 175°C junction temperature
- $V_{RRM}$  100 to 200 volts

## Electrical Characteristics

Average forward current per pkg  
Average forward current per leg  
Maximum surge current per leg  
Max. peak forward voltage per leg  
Max. peak reverse current per leg  
Typical junction capacitance  
Max. reverse recovery time

$I_F(AV)$  30 Amps  
 $I_F(AV)$  15 Amp  
 $I_{FSM}$  200 Amps  
 $V_{FM}$  .98 Volts  
 $I_{RM}$  10  $\mu$ A  
 $C_J$  180 pF  
trr 30nS

$T_C = 158^\circ\text{C}$ , square wave,  $R_{\theta JC} = .75^\circ\text{C/W}$   
 $T_C = 158^\circ\text{C}$ , square wave,  $R_{\theta JC} = 1.5^\circ\text{C/W}$   
8.3ms, half sine,  $T_J = 175^\circ\text{C}$   
 $I_{FM} = 15\text{A}$ ,  $T_J = 25^\circ\text{C}^*$   
 $V_{RRM}$ ,  $T_J = 25^\circ\text{C}$   
 $V_R = 10\text{V}$ ,  $T_J = 25^\circ\text{C}$   
1/2A, 1A, 1/4A,  $T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300  $\mu$ sec. Duty Cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range  
Operating junction temp range  
Max thermal resistance per leg  
Max thermal resistance per pkg  
Mounting torque  
Typical weight

TSTG  
 $T_J$   
 $R_{\theta JC}$   
 $R_{\theta JC}$   
 $R_{\theta JC}$

$-55^\circ\text{C}$  to  $+175^\circ\text{C}$   
 $-55^\circ\text{C}$  to  $+175^\circ\text{C}$   
 $1.5^\circ\text{C/W}$  Junction to case  
 $.75^\circ\text{C/W}$  Junction to case  
8–10 inch pounds (#6 screw)  
.22 ounces (6.36 grams) typical

# UF3010 — UF3020

Figure 1  
Typical Forward Characteristics — Per Leg

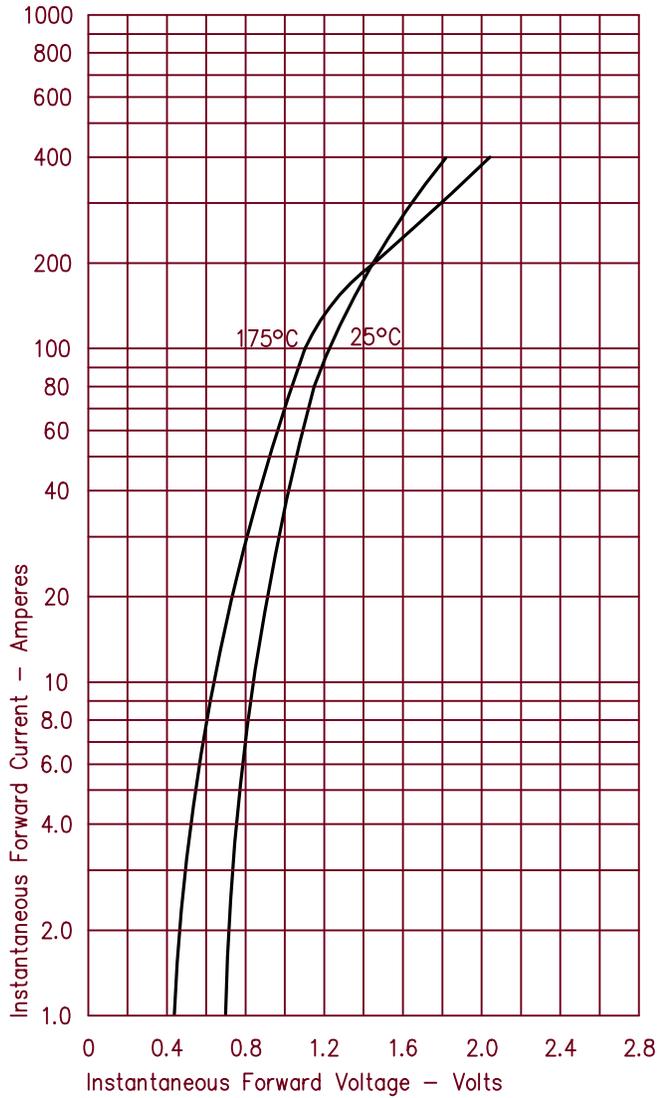


Figure 3  
Typical Junction Capacitance — Per Leg

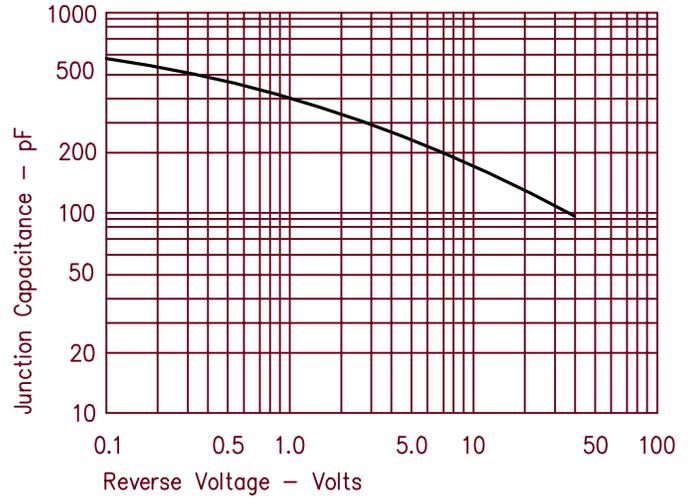


Figure 4  
Forward Current Derating — Per Leg

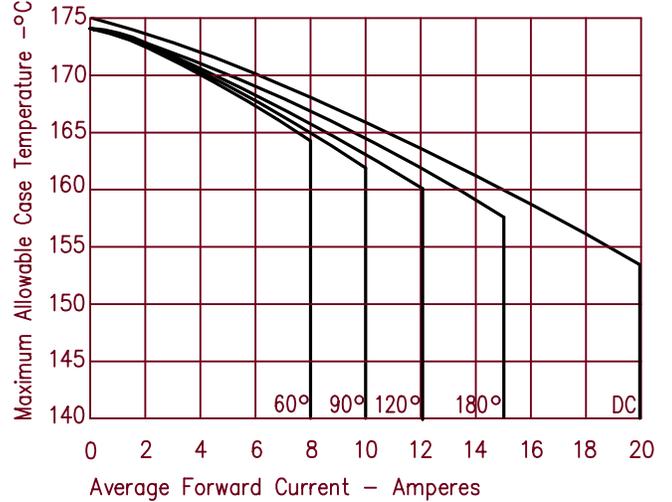


Figure 2  
Typical Reverse Characteristics — Per Leg

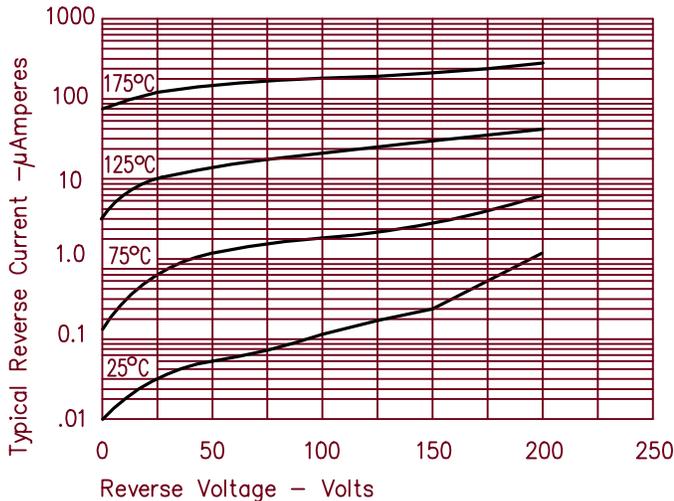


Figure 5  
Maximum Forward Power Dissipation — Per Leg

