


Ultrafast Recovery Modules

UFT125, 126 & 127

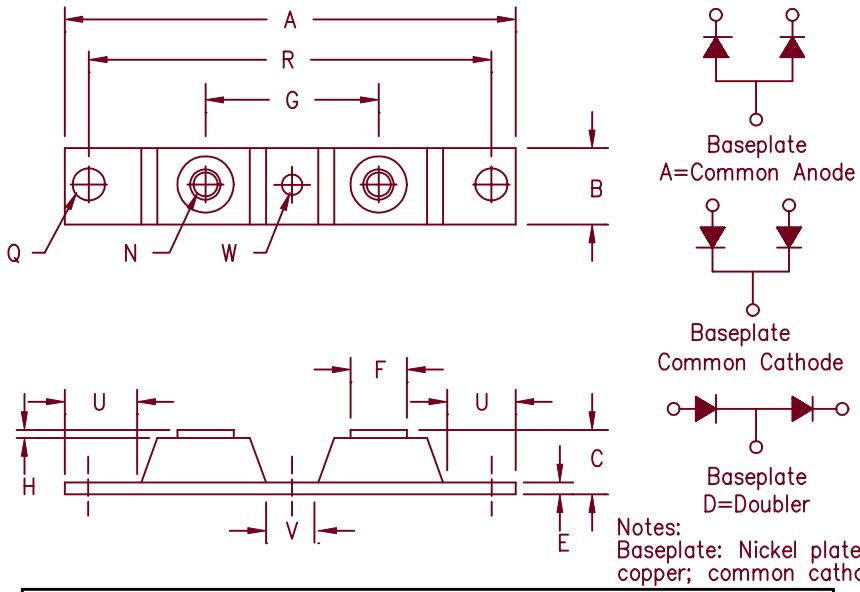

Dim.	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	---	3.630	---	92.20	
B	0.700	0.800	17.78	20.32	
C	---	0.630	---	16.00	
E	0.120	0.130	3.05	3.30	
F	0.490	0.510	12.45	12.95	
G	1.375 BSC		34.92 BSC		
H	0.010	---	0.25	---	
N	---	---	---	---	1/4-20 Dia.
Q	0.275	0.290	6.99	7.37	
R	3.150 BSC		80.01 BSC		
U	0.600	---	15.24	---	
V	0.312	0.340	7.92	8.64	
W	0.180	0.195	4.57	4.95	Dia.

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
UFT12505*	50V	50V	50V
UFT12510*	100V	100V	100V
UFT12515*	150V	150V	150V
UFT12520*	200V	200V	200V
UFT12630*	300V	300V	300V
UFT12640*	400V	400V	400V
UFT12650*	500V	500V	500V
UFT12760*	600V	600V	600V
UFT12770*	700V	700V	700V
UFT12780*	800V	800V	800V

Add Suffix A for Common Anode, D for Doubler

- Ultra Fast Recovery
- 175°C Junction Temperature
- V_{RRM} 50 to 800 Volts
- 120 Amps Current Rating
- 2 X 60 Amp current rating

Electrical Characteristics

	UFT125	UFT126	UFT127	
Average forward current per pkg	I _{F(AV)}	120A	120A	Square Wave
Average forward current per leg	I _{F(AV)}	60A	60A	Square Wave
Case Temperature	T _C	130°C	115°C	R _{θJC} = 0.85°C/W
Maximum surge current per leg	I _{FSM}	800A	700A	8.3ms, half sine, T _J = 175°C
Max peak forward voltage per leg	V _{FM}	.975V	1.25V	I _{FM} = 60A, T _J = 25°C*
Max reverse recovery time per leg	t _{rr}	40ns	60ns	1/2A, 1A, 1/4A, T _J = 25°C
Max peak reverse current per leg	I _{RM}	—	2.0ma	V _{RRM} , T _J = 125°C*
Max peak reverse current per leg	I _{RM}	—	30μa	V _{RRM} , T _J = 25°C
Typical Junction capacitance	C _J	270pF	200pF	V _R = 10V, T _J = 25°C

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-55°C to 175°C
Operating junction temp range	T _J	-55°C to 175°C
Max thermal resistance per leg	R _{θJC}	0.85°C/W Junction to case
Max thermal resistance per pkg	R _{θJC}	0.425°C/W Junction to case
Typical thermal resistance	R _{θCS}	0.08°C/W Case to sink
Terminal Torque		35–50 inch pounds
Mounting Base Torque – outside holes		30–40 inch pounds
Mounting Base Torque – (center hole)		8–10 inch pounds
center bolt must be torqued first		
Weight		2.8 ounces (75 grams) typical

UFT125

Figure 1
Typical Forward Characteristics – Per Leg

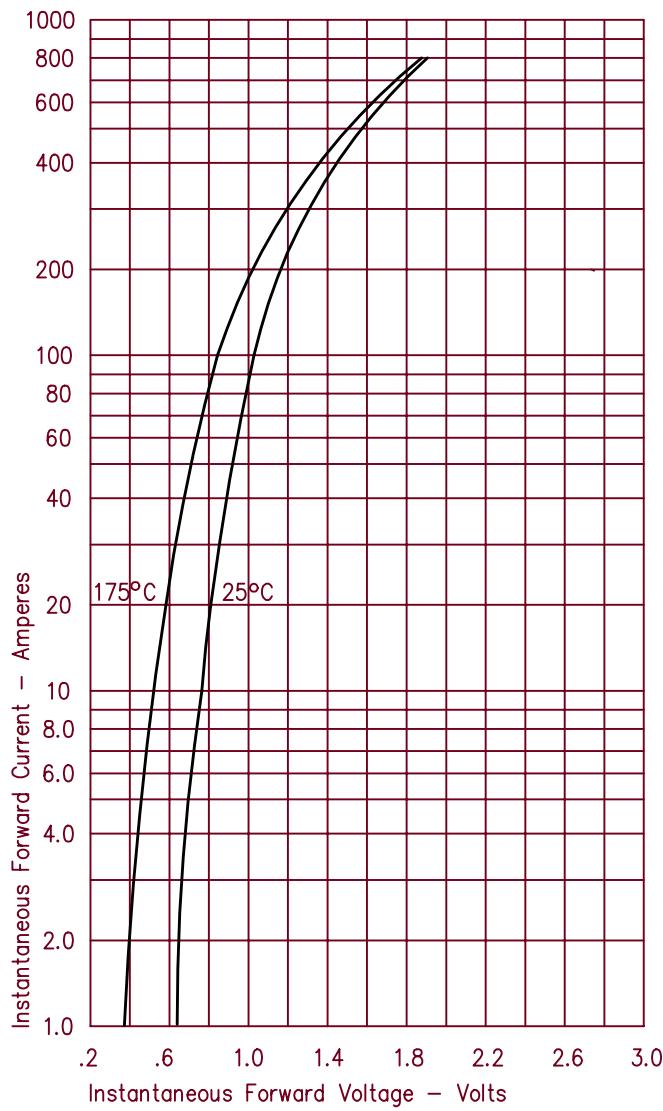


Figure 2
Typical Reverse Characteristics – Per Leg

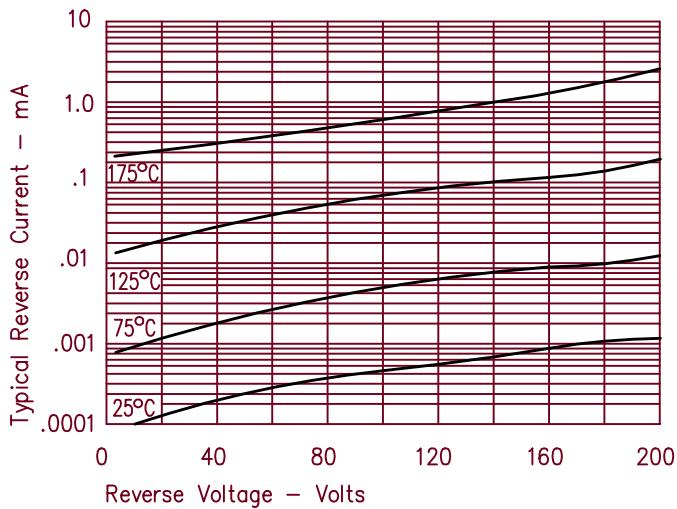


Figure 3
Typical Junction Capacitance – Per Leg

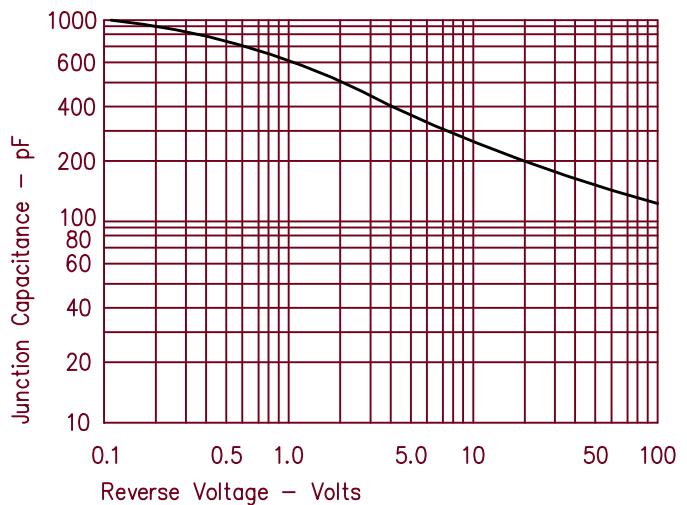


Figure 4
Forward Current Derating – Per Leg


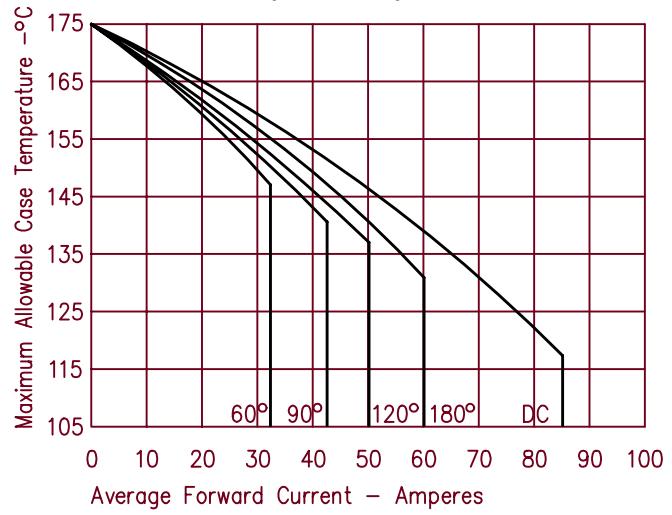


Figure 5
Maximum Forward Power Dissipation – Per Leg

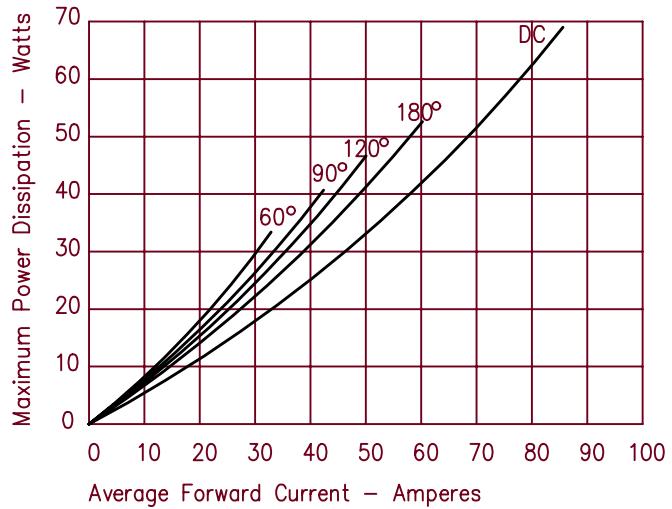

UFT126

Figure 1
Typical Forward Characteristics – Per Leg

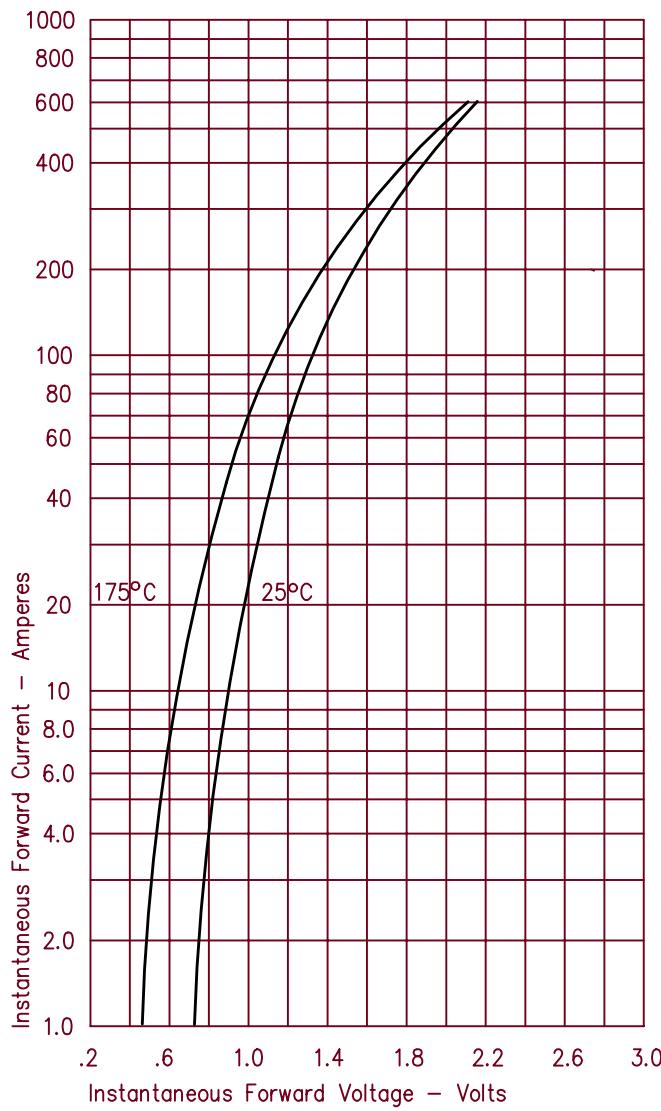


Figure 2
Typical Reverse Characteristics – Per Leg

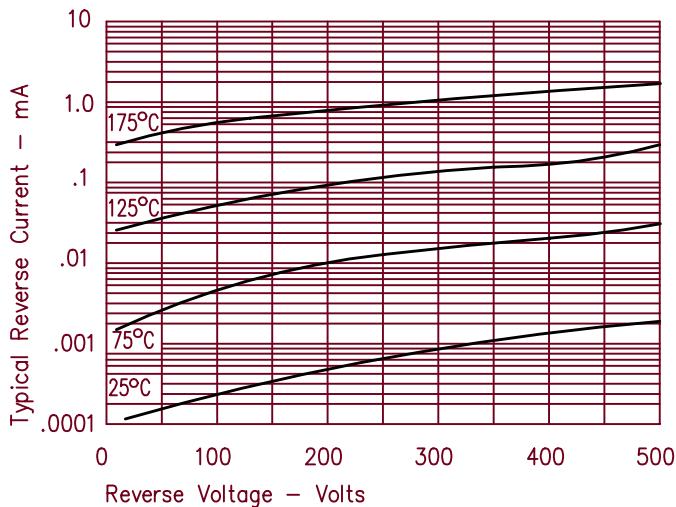


Figure 3
Typical Junction Capacitance – Per Leg

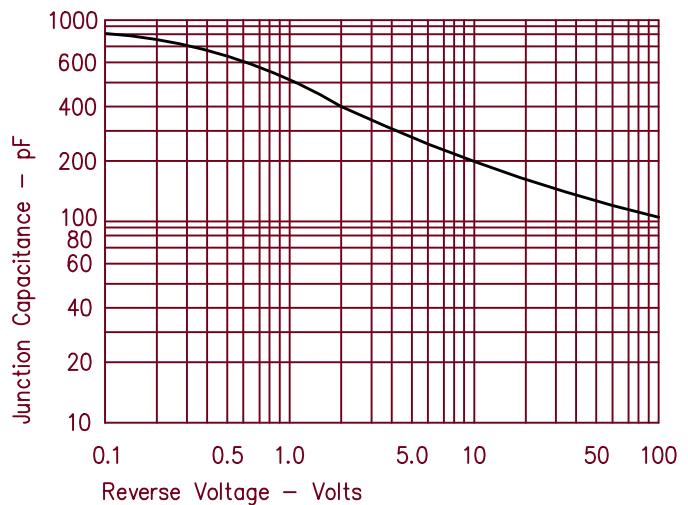


Figure 4
Forward Current Derating – Per Leg


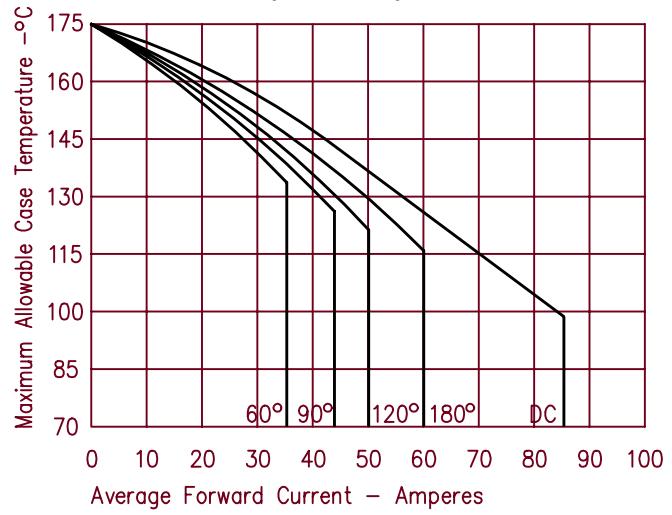


Figure 5
Maximum Forward Power Dissipation – Per Leg

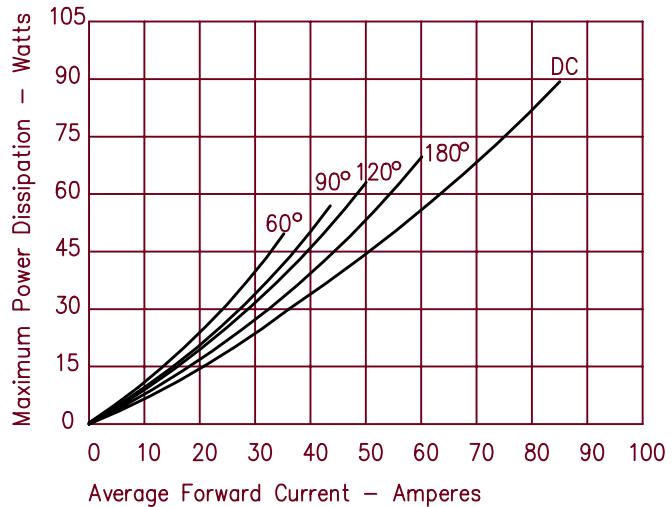

UFT127

Figure 1
Typical Forward Characteristics – Per Leg

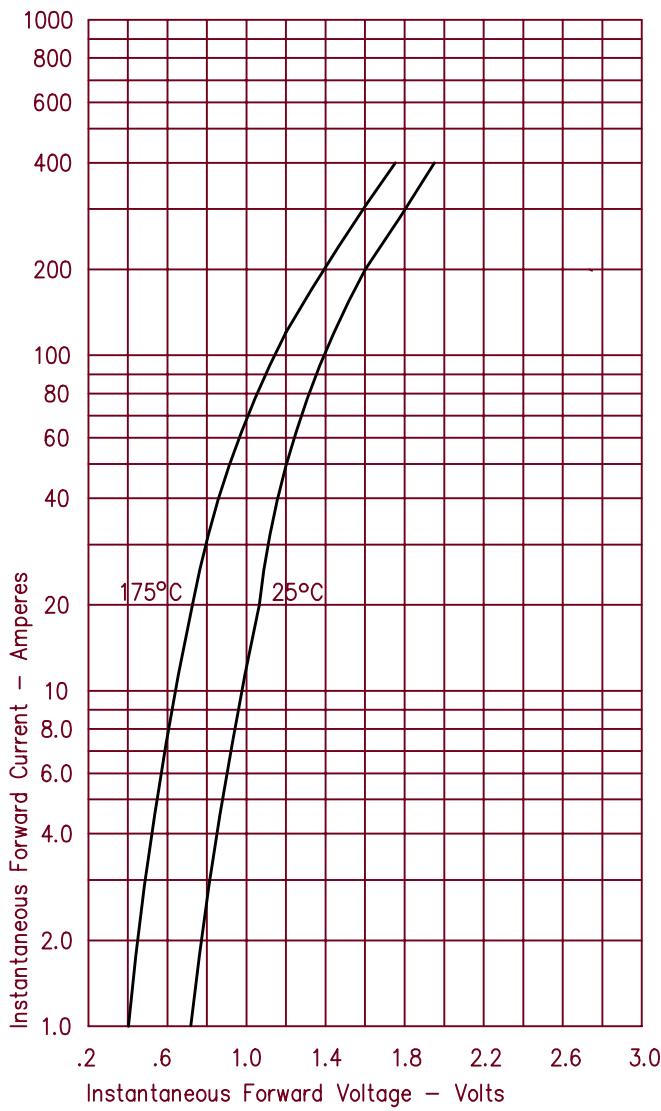


Figure 3
Typical Junction Capacitance – Per Leg

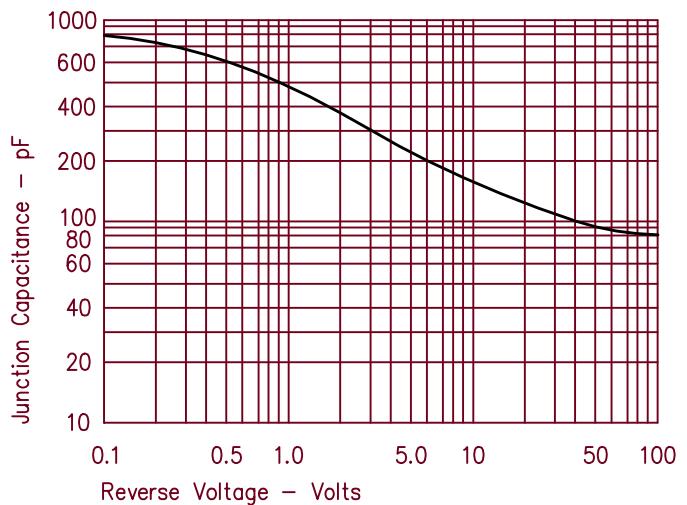


Figure 4
Forward Current Derating – Per Leg

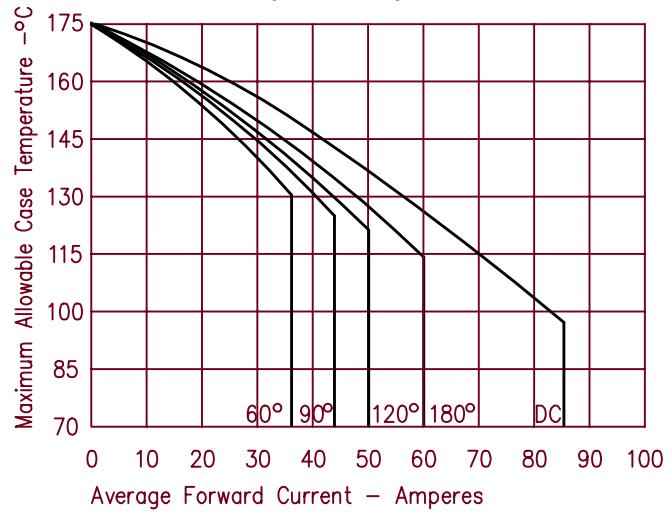


Figure 2
Typical Reverse Characteristics – Per Leg

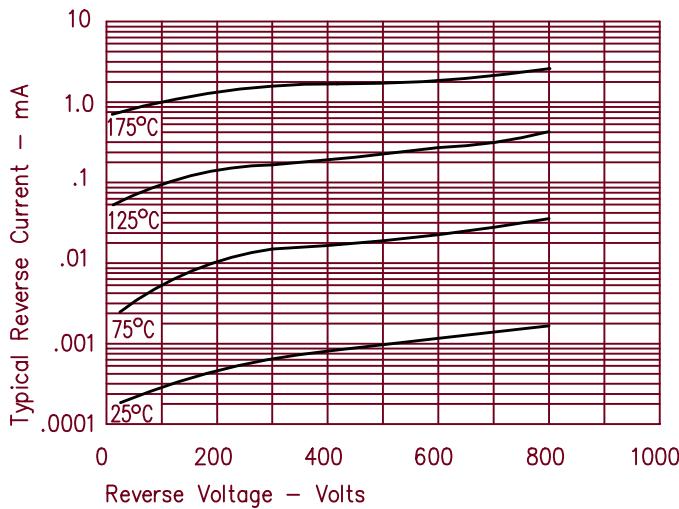


Figure 5
Maximum Forward Power Dissipation – Per Leg

