


MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	% EFF
UM3911	48 VDC	5 VDC	30 A	90
UM3919	48 VDC	3.3 VDC	30 A	88

MODEL NUMBER	UM3911	UM3919
MAXIMUM ⁵ CAPACITIVE LOAD	2200uF	2200uF

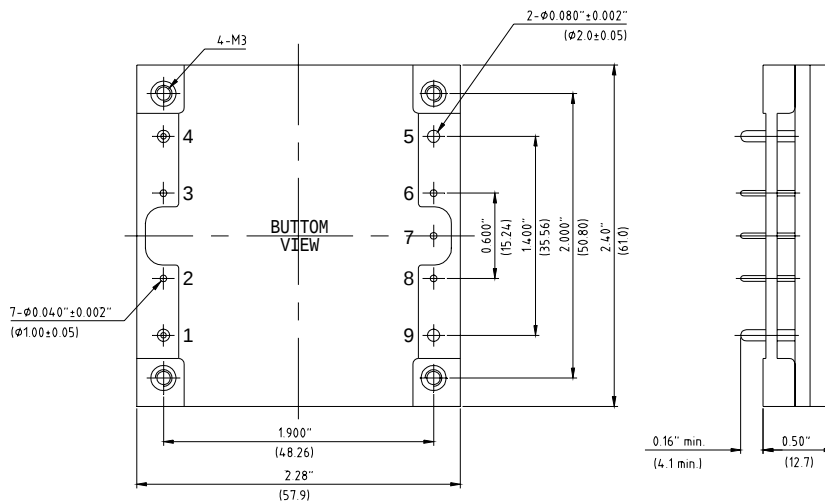


All dimensions in inches(mm)
Tolerance .xx =±0.04"
.xxx =±0.010"

Pin Connections*	
Pin	Function
1	+Vin
2	ON/OFF
3	CASE
4	-Vin
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

NOTE:

* : If remote sensing not utilized, output sense pin must be jumpered to respective output power pins, for normal operation connect Pin NO.5 to Pin NO.6 and Pin NO.8 to Pin NO.9.



**UNIVERSAL
MICROELECTRONICS**

3,27TH RD., TAICHUNG INDUSTRIAL PARK,
TAICHUNG, TAIWAN, R.O.C.
TEL: 886-4-23590096 FAX: 886-4-23590129