



UTRON

Rev. 1.0

UT62256C(E)
32K X 8 BIT LOW POWER CMOS SRAM

REVISION HISTORY

REVISION	DESCRIPTION	DATE
Rev. 1.0	Original.	Sep 3 ,2001



UTRON


Rev. 1.0

UT62256C(E) 32K X 8 BIT LOW POWER CMOS SRAM

FEATURES

- Access time : 35/70ns (max.)
- Low power consumption:
Operating : 40/30 mA (typical.)
Standby : 2uA (typ.) L-version
1uA (typ.) LL-version
- Single 5V power supply
- Extended temperature : -20 ~80
- All inputs and outputs are TTL compatible
- Fully static operation
- Three state outputs
- Data retention voltage : 2V (min.)
- Package : 28-pin 600 mil PDIP
28-pin 330 mil SOP
28-pin 8mmx13.4mm STSOP

FUNCTIONAL BLOCK DIAGRAM

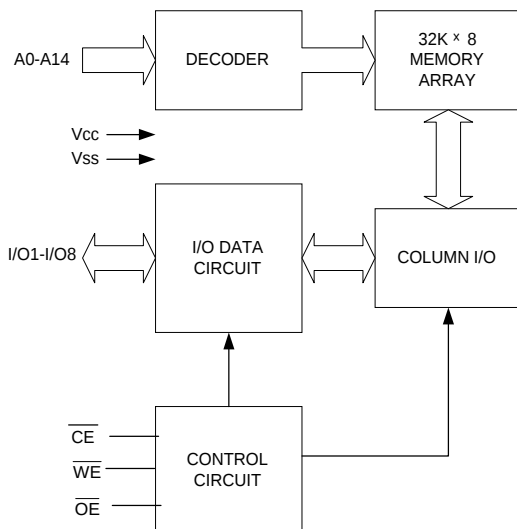

PIN DESCRIPTION

SYMBOL	DESCRIPTION
A0 - A14	Address Inputs
I/O1 - I/O8	Data Inputs/Outputs
$\overline{CE}$	Chip Enable Input
$\overline{WE}$	Write Enable Input
$\overline{OE}$	Output Enable Input
V_{CC}	Power Supply
V_{SS}	Ground


GENERAL DESCRIPTION

The UT62256C(E) is a 262,144-bit low power CMOS static random access memory organized as 32,768 words by 8 bits. It is fabricated using high performance, high reliability CMOS technology.


The UT62256C(E) is designed for high-speed and low power application. It is particularly well suited for battery back-up nonvolatile memory application.

The UT62256C(E) operates from a single 5V power supply and all inputs and outputs are fully TTL compatible

PIN CONFIGURATION

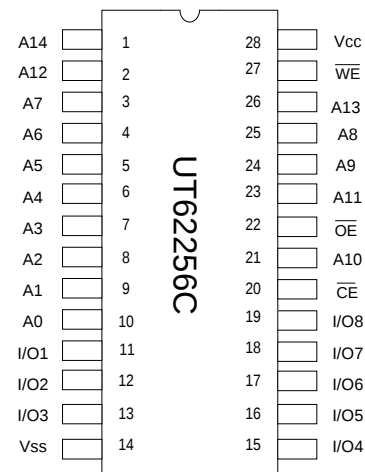

PDIP/SOP

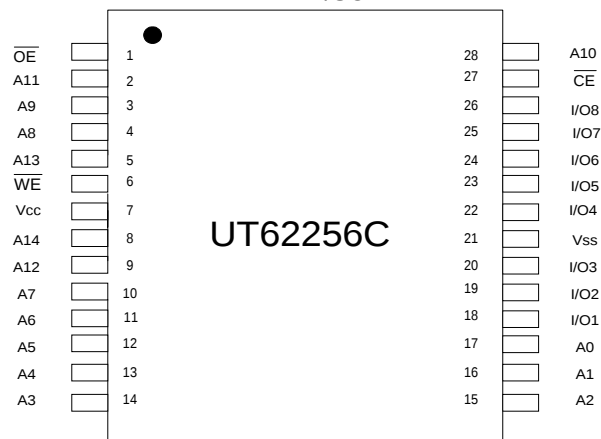

STSOP



UTRON

Rev. 1.0

UT62256C(E) 32K X 8 BIT LOW POWER CMOS SRAM

ABSOLUTE MAXIMUM RATINGS*

PARAMETER	SYMBOL	RATING	UNIT
Terminal Voltage with Respect to V_{SS}	V_{TERM}	-0.5 to +7.0	V
Operating Temperature	T_A	0 to +70	
Storage Temperature	T_{STG}	-65 to +150	
Power Dissipation	P_D	1	W
DC Output Current	I_{OUT}	50	mA
Soldering Temperature (under 10 secs)	T_{solder}	260	

*Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect device reliability.

TRUTH TABLE

MODE	$\overline{CE}$	$\overline{OE}$	$\overline{WE}$	I/O OPERATION	SUPPLY CURRENT
Standby	H	X	X	High - Z	I_{SB}, I_{SB1}
Output Disable	L	H	H	High - Z	I_{CC}, I_{CC1}, I_{CC2}
Read	L	L	H	D_{OUT}	I_{CC}, I_{CC1}, I_{CC2}
Write	L	X	L	D_{IN}	I_{CC}, I_{CC1}, I_{CC2}

Note: H = V_{IH} , L = V_{IL} , X = Don't care.

DC ELECTRICAL CHARACTERISTICS ($V_{CC} = 5V \pm 10\%$, $T_A = -20 \sim 80$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input High Voltage	V_{IH}		2.2	-	$V_{CC} + 0.5$	V
Input Low Voltage	V_{IL}		-0.5	-	0.8	V
Input Leakage Current	I_{LI}	$V_{SS} \quad V_{IN} \quad V_{CC}$	-1	-	1	μA
Output Leakage Current	I_{LO}	$V_{SS} \quad V_{IO} \quad V_{CC}$ $\overline{CE} = V_{IH}$ or $\overline{OE} = V_{IH}$ or $\overline{WE} = V_{IL}$	-1	-	1	μA
Output High Voltage	V_{OH}	$I_{OH} = -1mA$	2.4	-	-	V
Output Low Voltage	V_{OL}	$I_{OL} = 4mA$	-	-	0.4	V
Operating Power Supply Current	I_{CC}	Cycle time=Min	-35	40	50	mA
		$\overline{CE} = V_{IL}, I_{IO} = 0mA$,	-70	30	40	mA
	I_{CC1}	Cycle time=1 μs , $\overline{CE} = 0.2V$; $I_{IO} = 0mA$, other pins at 0.2V or $V_{CC} - 0.2V$	-	-	10	mA
	I_{CC2}	Cycle time=500ns, $\overline{CE} = 0.2V$; $I_{IO} = 0mA$, other pins at 0.2V or $V_{CC} - 0.2V$	-	-	20	mA
Standby Current(TTL)	I_{SB}	$\overline{CE} = V_{IH}$	-	-	3	mA
Standby Current(CMOS)	I_{SB1}	$\overline{CE} \quad V_{CC} - 0.2V$	-L	2	100	μA
			-LL	1	50	μA

Notes:

1. Overshoot : $V_{CC} + 2.0V$ for pulse width less than 10ns.
2. Undershoot : $V_{SS} - 2.0V$ for pulse width less than 10ns.
3. Overshoot and Undershoot are sampled, not 100% tested.



UTRON

Rev. 1.0

UT62256C(E) 32K X 8 BIT LOW POWER CMOS SRAM

CAPACITANCE (TA=25 , f=1.0MHz)

PARAMETER	SYMBOL	MIN.	MAX	UNIT
Input Capacitance	C _{IN}	-	8	pF
Input/Output Capacitance	C _{I/O}	-	10	pF

Note : These parameters are guaranteed by device characterization, but not production tested.

AC TEST CONDITIONS

Input Pulse Levels	0V to 3.0V
Input Rise and Fall Times	5ns
Input and Output Timing Reference Levels	1.5V
Output Load	C _L = 100pF, I _{OH} /I _{OL} = -1mA/4mA

AC ELECTRICAL CHARACTERISTICS (V_{CC} = 5V±10% , T_A = -20 ~80)

(1) READ CYCLE

PARAMETER	SYMBOL	UT62256C(E)-35		UT62256C(E)-70		UNIT
		MIN.	MAX.	MIN.	MAX.	
Read Cycle Time	t _{RC}	35	-	70	-	ns
Address Access Time	t _{AA}	-	35	-	70	ns
Chip Enable Access Time	t _{ACE}	-	35	-	70	ns
Output Enable Access Time	t _{OE}	-	25	-	35	ns
Chip Enable to Output in Low Z	t _{CLZ*}	10	-	10	-	ns
Output Enable to Output in Low Z	t _{OLZ*}	5	-	5	-	ns
Chip Disable to Output in High Z	t _{CHZ*}	-	25	-	35	ns
Output Disable to Output in High Z	t _{OHZ*}	-	25	-	35	ns
Output Hold from Address Change	t _{OH}	5	-	5	-	ns

(2) WRITE CYCLE



PARAMETER	SYMBOL	UT62256C(E)-35		UT62256C(E)-70		UNIT
		MIN.	MAX.	MIN.	MAX.	
Write Cycle Time	t _{WC}	35	-	70	-	ns
Address Valid to End of Write	t _{AW}	30	-	60	-	ns
Chip Enable to End of Write	t _{CW}	30	-	60	-	ns
Address Set-up Time	t _{AS}	0	-	0	-	ns
Write Pulse Width	t _{WP}	25	-	50	-	ns
Write Recovery Time	t _{WR}	0	-	0	-	ns
Data to Write Time Overlap	t _{DW}	20	-	30	-	ns
Data Hold from End of Write Time	t _{DH}	0	-	0	-	ns
Output Active from End of Write	t _{OW*}	5	-	5	-	ns
Write to Output in High Z	t _{WHZ*}	-	15	-	25	ns

*These parameters are guaranteed by device characterization, but not production tested.



TIMING WAVEFORMS

READ CYCLE 1 (Address Controlled) (1,2)

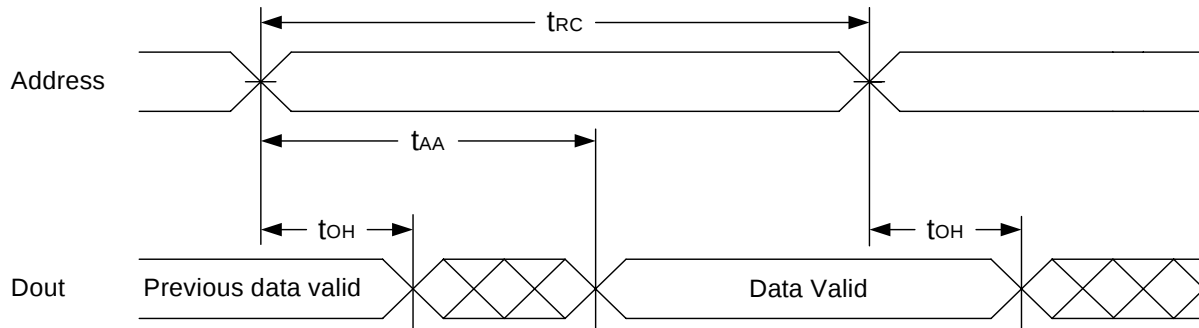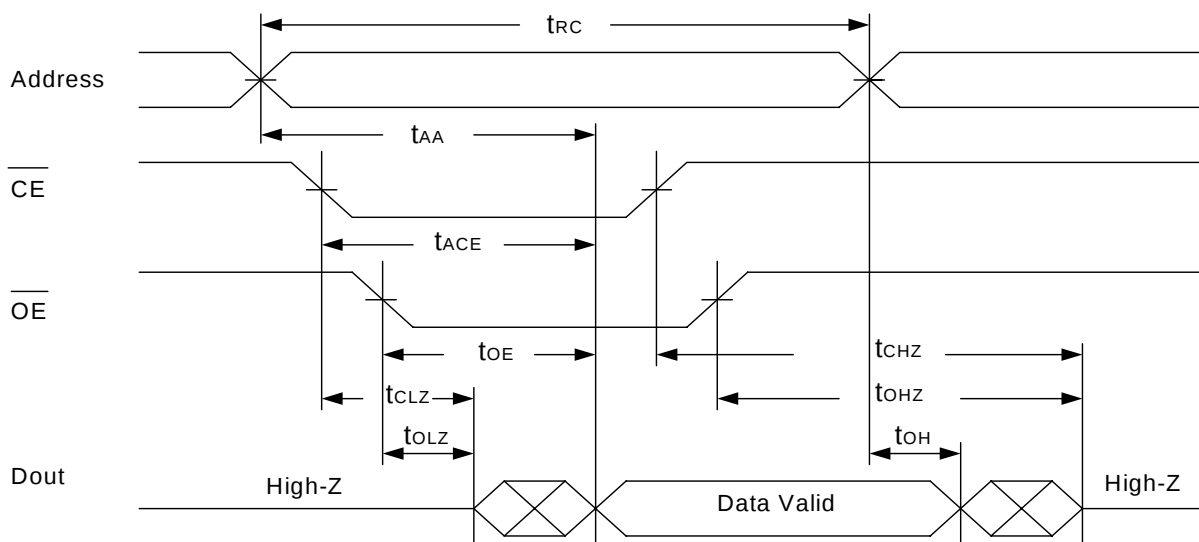READ CYCLE 2 ($\overline{CE}$ and $\overline{OE}$ Controlled) (1,3,4,5)

Notes :

1. $\overline{WE}$ is high for read cycle.
2. Device is continuously selected $\overline{OE} = \text{low}$, $\overline{CE} = \text{low}$.
3. Address must be valid prior to or coincident with $\overline{CE} = \text{low}$; otherwise t_{AA} is the limiting parameter.
4. t_{CLZ} , t_{OLZ} , t_{CHZ} and t_{OHZ} are specified with $C_L = 5\text{pF}$. Transition is measured $\pm 500\text{mV}$ from steady state.
5. At any given temperature and voltage condition, t_{CHZ} is less than t_{CLZ} is less than t_{OHZ} is less than t_{OLZ} .




UTRON


Rev. 1.0

UT62256C(E) 32K X 8 BIT LOW POWER CMOS SRAM

WRITE CYCLE 1 ($\overline{WE}$ Controlled) (1,2,3,5,6)

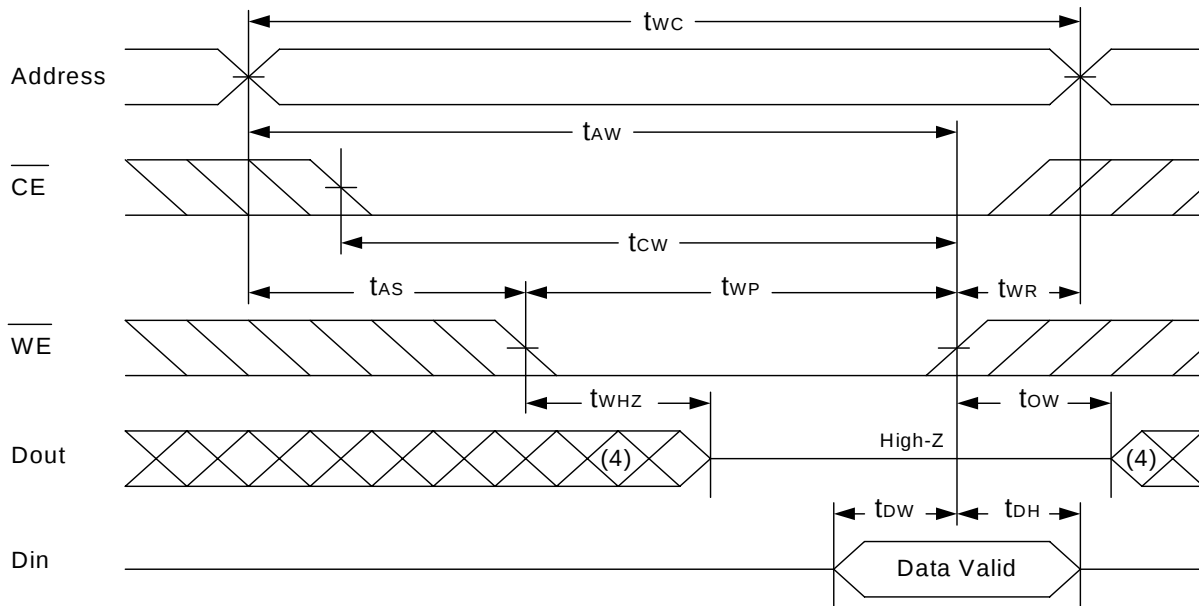

WRITE CYCLE 2 ($\overline{CE}$ Controlled) (1,2,5,6)

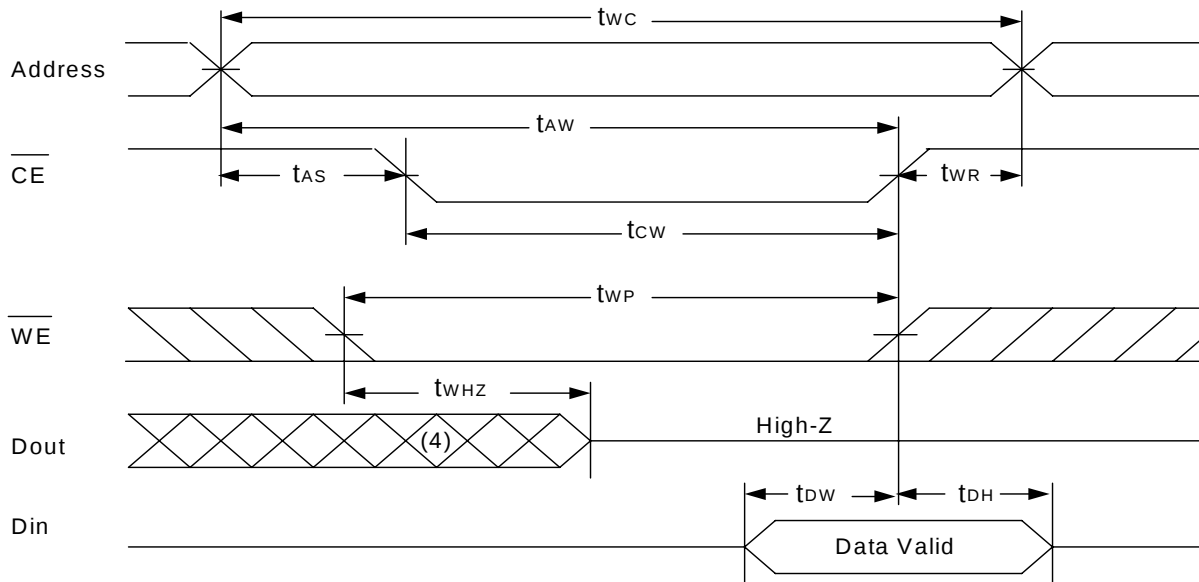



UTRON

Rev. 1.0

UT62256C(E) 32K X 8 BIT LOW POWER CMOS SRAM

Notes :

1. $\overline{WE}$, $\overline{CE}$ must be high during all address transitions.
2. A write occurs during the overlap of a low $\overline{CE}$, low $\overline{WE}$.
3. During a $\overline{WE}$ controlled write cycle with $\overline{OE}$ low, t_{WP} must be greater than $t_{WHZ} + t_{DW}$ to allow the drivers to turn off and data to be placed on the bus.
4. During this period, I/O pins are in the output state, and input signals must not be applied.
5. If the $\overline{CE}$ low transition occurs simultaneously with or after $\overline{WE}$ low transition, the outputs remain in a high impedance state.
6. t_{OW} and t_{WHZ} are specified with $C_L = 5pF$. Transition is measured $\pm 500mV$ from steady state.


DATA RETENTION CHARACTERISTICS ($T_A = -20 \sim -80$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Vcc for Data Retention	V_{DR}	$\overline{CE}$ $V_{CC}-0.2V$	2.0	-	5.5	V
Data Retention Current	I_{DR}	$V_{CC}=3V$ $\overline{CE}$ $V_{CC}-0.2V$	- L	-	1	μA
			- LL	-	0.5	μA
Chip Disable to Data Retention Time	t_{CDR}	See Data Retention Waveforms (below)	0	-	-	ns
Recovery Time	t_R		t_{RC}^*	-	-	ns

t_{RC}^* = Read Cycle Time

DATA RETENTION WAVEFORM

Low Vcc Data Retention Waveform ($\overline{CE}$ controlled)

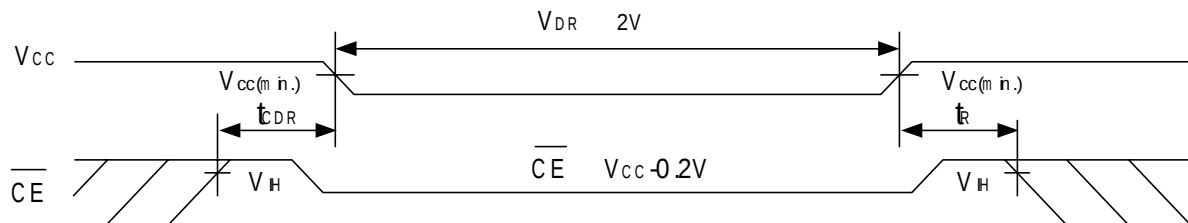




UTRON

Rev. 1.0

UT62256C(E)
32K X 8 BIT LOW POWER CMOS SRAM

PACKAGE OUTLINE DIMENSION

28 pin 600 mil PDIP PACKAGE OUTLINE DIMENSION

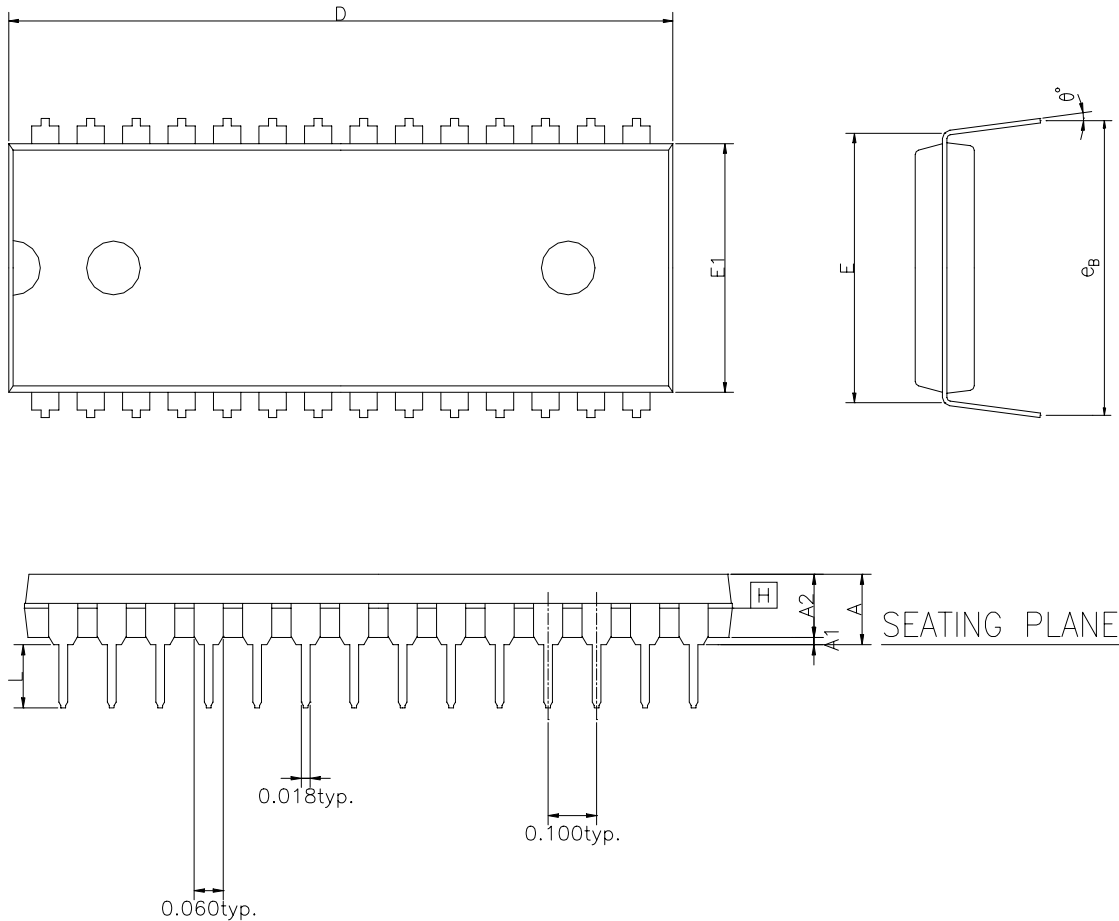

SYMBOL \ UNIT	INCH(MIN)	INCH(MAX)
A	-	0.220
A1	0.015	-
D	1.455	1.47
E	0.6	0.6
E1	0.54	0.54
eB	0.63	0.67
Θ	0°	15°




UTRON

Rev. 1.0

UT62256C(E)
32K X 8 BIT LOW POWER CMOS SRAM

28 pin 330 mil SOP PACKAGE OUTLINE DIMENSION

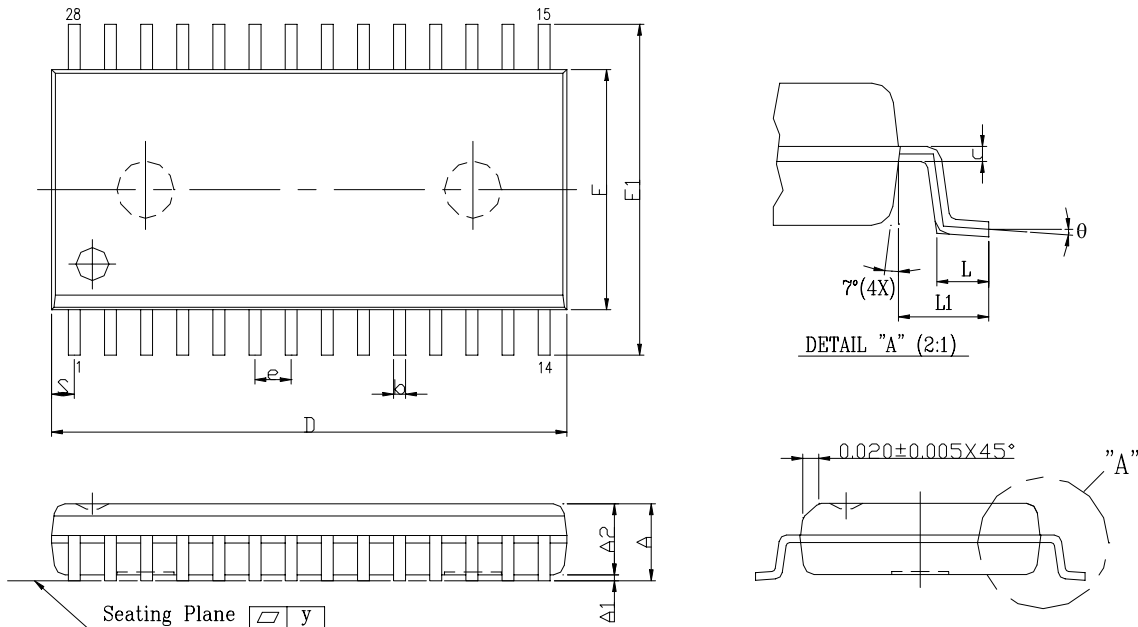

SYMBOL \ UNIT	INCH(BASE)	MM(REF)
A	0.120 (MAX)	3.048 (MAX)
A1	0.002(MIN)	0.05(MIN)
A2	0.098±0.005	2.489±0.127
b	0.0016 (TYP)	0.406(TYP)
c	0.010 (TYP)	0.254(TYP)
D	0.728 (MAX)	18.491 (MAX)
E	0.340 (MAX)	8.636 (MAX)
E1	0.465±0.012	11.811±0.305
e	0.050 (TYP)	1.270(TYP)
L	0.05 (MAX)	1.270 (MAX)
L1	0.067±0.008	1.702 ±0.203
S	0.047 (MAX)	1.194 (MAX)
y	0.003(MAX)	0.076(MAX)
Θ	0° 10°	0° 10°




UTRON

Rev. 1.0

UT62256C(E)
32K X 8 BIT LOW POWER CMOS SRAM

28 pin 8x13.4mm STSOP PACKAGE OUTLINE DIMENSION

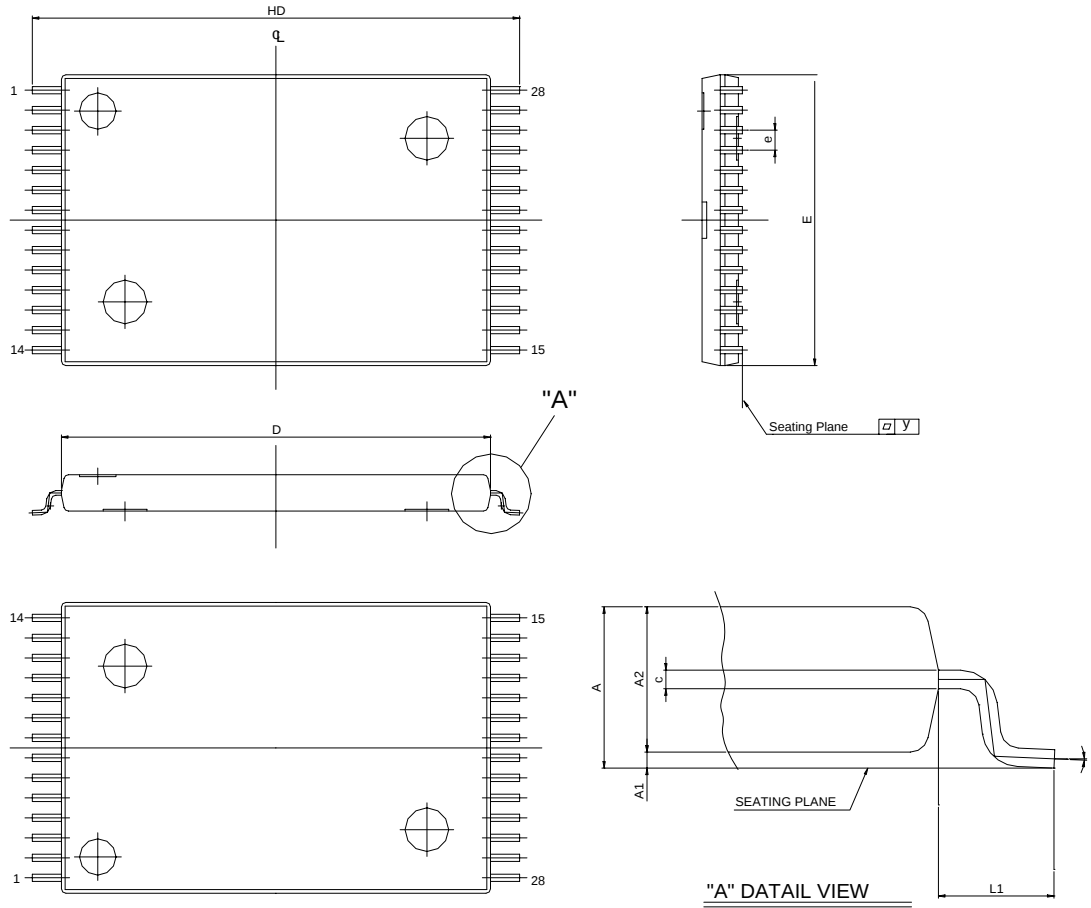

SYMBOL \ UNIT	INCH(BASE)	MM(REF)
A	0.047 (MAX)	1.20 (MAX)
A1	0.004 ±0.002	0.10 ±0.05
A2	0.039 ±0.002	1.00 ±0.05
D	0.465 ±0.004	11.800 ±0.100
E	0.315 ±0.004	8.000 ±0.100
e	0.022 (TYP)	0.55 (TYP)
HD	0.528 ±0.008	13.40 ±0.20.
L1	0.0315 ±0.004	0.80 ±0.10
y	0.003 (MAX)	0.076 (MAX)
Θ	0° 5°	0° 5°



UTRON

Rev. 1.0

UT62256C(E) 32K X 8 BIT LOW POWER CMOS SRAM

ORDERING INFORMATION

PART NO.	ACCESS TIME (ns)	STANDBY CURRENT (μ A)	PACKAGE
UT62256CPC-70E	70	5 mA	28PIN PDIP
UT62256CPC-70LE	70	100 μ A	28PIN PDIP
UT62256CPC-70LLE	70	40 μ A	28PIN PDIP
UT62256CSC-35E	35	5 mA	28PIN SOP
UT62256CSC-35LE	35	100 μ A	28PIN SOP
UT62256CSC-35LLE	35	40 μ A	28PIN SOP
UT62256CSC-70E	70	5 mA	28PIN SOP
UT62256CSC-70LE	70	100 μ A	28PIN SOP
UT62256CSC-70LLE	70	40 μ A	28PIN SOP
UT62256CLS-35LE	35	100 μ A	28PIN STSOP
UT62256CLS-35LLE	35	50 μ A	28PIN STSOP
UT62256CLS-70LE	70	100 μ A	28PIN STSOP
UT62256CLS-70LLE	70	40 μ A	28PIN STSOP



Rev. 1.0

UTRON

UT62256C(E)
32K X 8 BIT LOW POWER CMOS SRAM

THIS PAGE IS LEFT BLANK INTENTIONALLY.