


VM6SS

Resistance Weld Very Low Profile Crystal





FEATURES

- Very Low Profile (2,5mm)
- Wide Frequency Range Available
- AT Strip
- Cost Effective

OPTIONS

- Mylar Spacer
- Tape & Reel

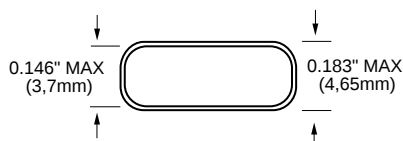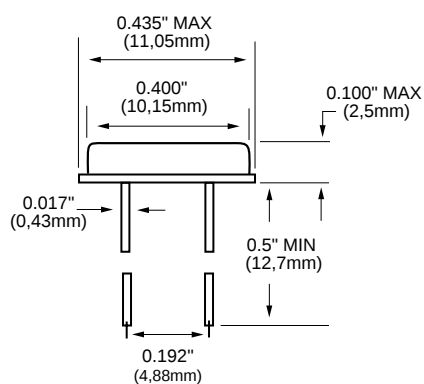

Parameter	Unit	Condition	Min	Typ	Max	Note
Frequency Range	MHz		12.00		70.0	
Frequency Tolerance	ppm	@25°C		±50		Additional Tolerances Available
Frequency Stability	ppm	0°C to +70°C		±100		Ref: @25°C
Operating Temperature Range	°C		0		+70	Additional Ranges Available
Storage Temperature Range	°C		-30		+85	
Shunt Capacitance (C_0)	pF				7.0	
Load Capacitance (C_L)	pF	Customer Specified	10.0	18.0	Series	
Drive Level	mW				0.5	
Aging Per Year	ppm	@25°C			±5.0	
Frequency Range		Mode		Max ESR (Ω)		
8.000 - 9.000		Fundamental		80		
9.000 - 13.000		Fundamental		60		
13.000 - 20.000		Fundamental		40		
20.000 - 36.000		Fundamental		30		
27.000 - 70.000		3rd Overtone		100		

Note: Please reference "Building a Part Number" on page 36 if the desired specification is not found in the "Standard Crystal Part Number Chart" on pages 13-14.

All specifications are subject to change without notice.