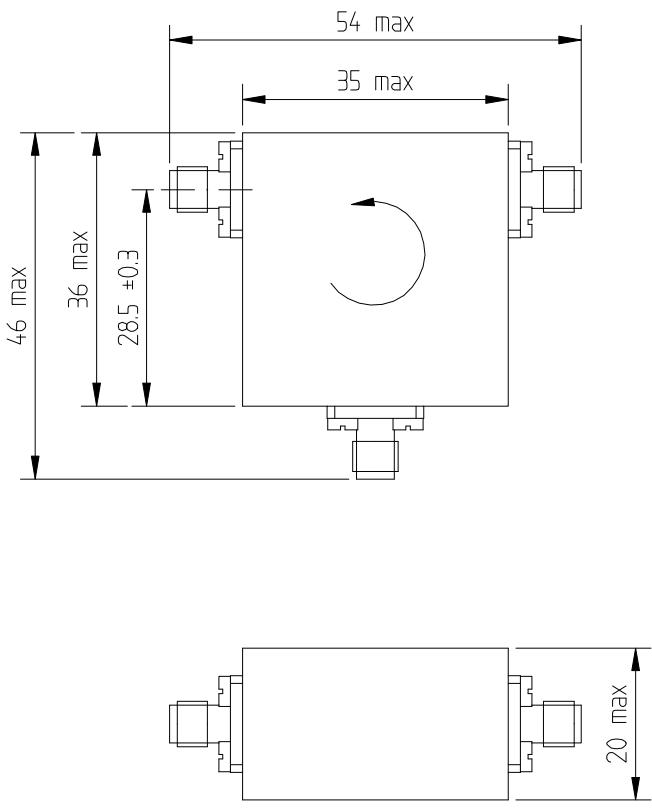


		Ausgabe	1	Erstellt	23.11.99 Sz
		1. Änderung		2. Änderung	
 Top view dimensions: 54 max, 35 max, 46 max, 36 max, 28.5 ±0.3. A curved arrow indicates clockwise rotation. Side view dimension: 20 max. Frequency : 2100...2500MHz Isolation : min 20dB Insertion loss : max 0.4dB VSWR : max 1.20 Power : 10W cw Temperature range : -20 ...+55C RF-leakage : max 70dB Connectors : SMA (3xfemale) Dimensions : 35x36x20 mm					
	Art	Circulator		Artikel-Nr.	2722 162 05351
	Typ	VAU 535		Blatt-Nr.	
bearbeitet :		geprüft :		 Bauelemente GmbH, Hamburg	