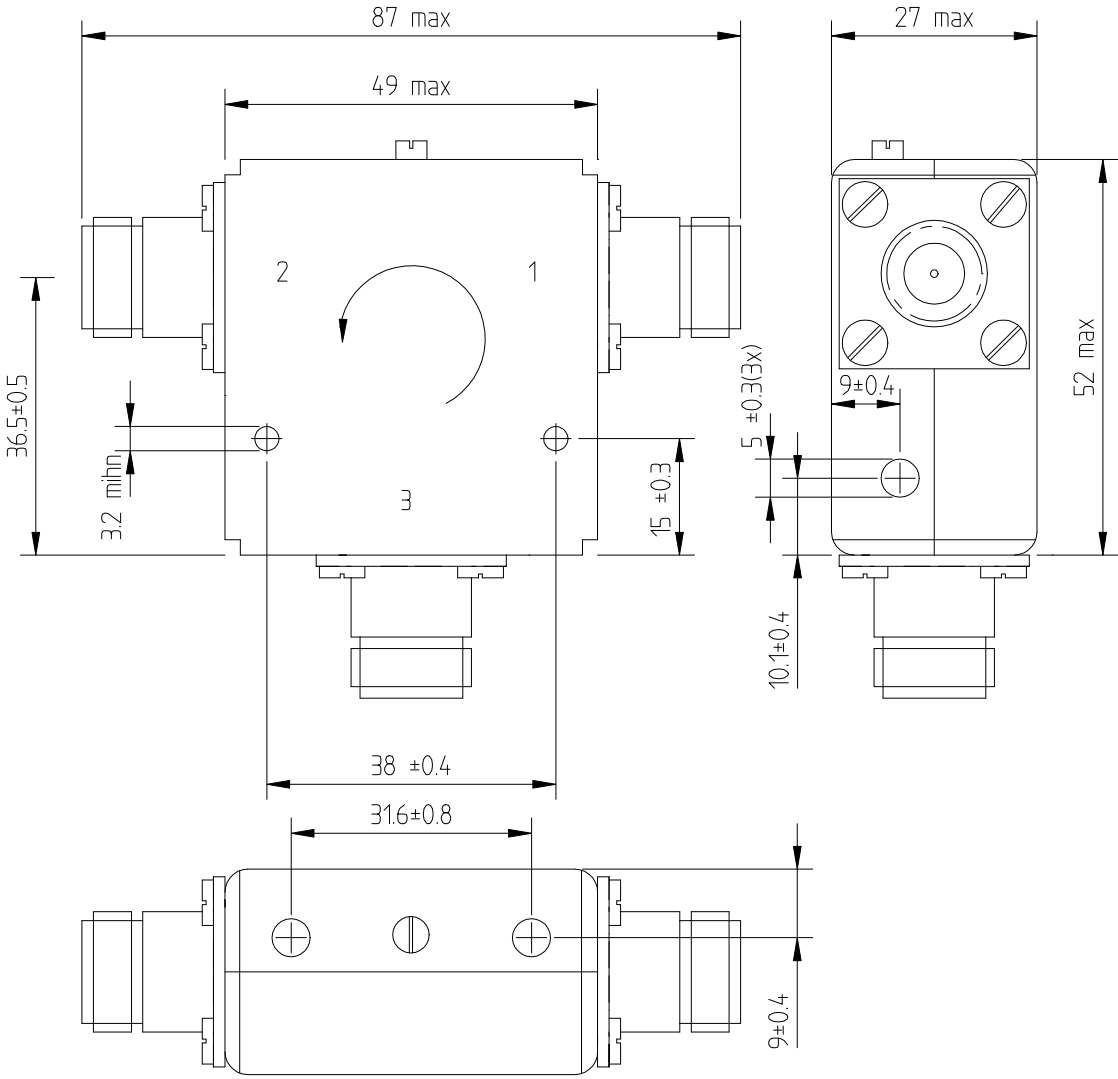


Datei:		Ausgabe	1	Erstellt	14.01.2000 Sz
		1. Änderung		2. Änderung	
 Technical drawing of a circulator showing three views: top, side, and front. Dimensions are provided in millimeters. - Top view: Overall width 87 max, internal width 49 max, height 36.5±0.5. Mounting holes are 32 mm apart. A curved arrow indicates clockwise rotation. Labels 1, 2, and 3 are present. - Side view: Overall width 27 max, height 52 max. Mounting holes are 9±0.4 mm from the top and bottom edges. A dimension of 5 ±0.3(3x) is shown for the mounting holes. - Front view: Overall width 38 ±0.4, height 31.6±0.8. Mounting holes are 9±0.4 mm from the top and bottom edges.					
Frequency : 140.9...146.1MHz tunable Isolation : min 22dB Insertion loss : max 0.4dB VSWR : max 1.20 Power : 110W cw Temperature range : 0 ...+55°C Connectors : N (3xfemale) Dimensions : 49x52x27 mm					
M 1 : 1	Art	Circulator		Artikel-Nr. 2722 162 0542 1	
	Typ	VAB 542		Blatt-Nr.	
bearbeitet :		geprüft :		 Bauelemente GmbH, Hamburg	