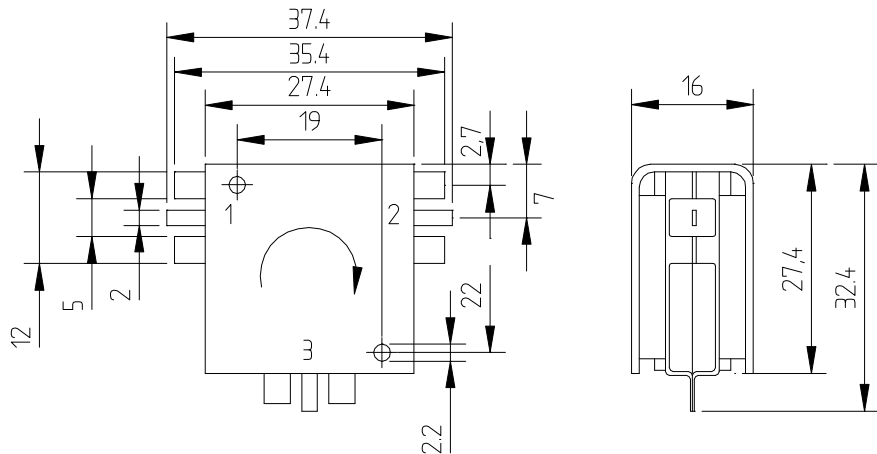


Datei:		Ausgabe	1	Erstellt	13.03.2000 Sz																								
		1. Änderung		2. Änderung																									
 <table><tr><td>Frequency</td><td>:</td><td>3100...3500MHz</td></tr><tr><td>Isolation</td><td>:</td><td>min 20dB</td></tr><tr><td>Insertion loss</td><td>:</td><td>max 0.4dB</td></tr><tr><td>VSWR</td><td>:</td><td>max 1.25</td></tr><tr><td>Power</td><td>:</td><td>100W cw peak</td></tr><tr><td>Temperature range</td><td>:</td><td>-20 ...+70°C</td></tr><tr><td>Connectors</td><td>:</td><td>Coplanar line</td></tr><tr><td>Dimensions</td><td>:</td><td>27,4x27,4x16 mm</td></tr></table>						Frequency	:	3100...3500MHz	Isolation	:	min 20dB	Insertion loss	:	max 0.4dB	VSWR	:	max 1.25	Power	:	100W cw peak	Temperature range	:	-20 ...+70°C	Connectors	:	Coplanar line	Dimensions	:	27,4x27,4x16 mm
Frequency	:	3100...3500MHz																											
Isolation	:	min 20dB																											
Insertion loss	:	max 0.4dB																											
VSWR	:	max 1.25																											
Power	:	100W cw peak																											
Temperature range	:	-20 ...+70°C																											
Connectors	:	Coplanar line																											
Dimensions	:	27,4x27,4x16 mm																											
M 1 : 1	Art		Circulator		Artikel-Nr.	2722 162 0558 1																							
	Typ		VBU 558		Blatt-Nr.																								
bearbeitet :		geprüft :		 Bauelemente GmbH, Hamburg																									