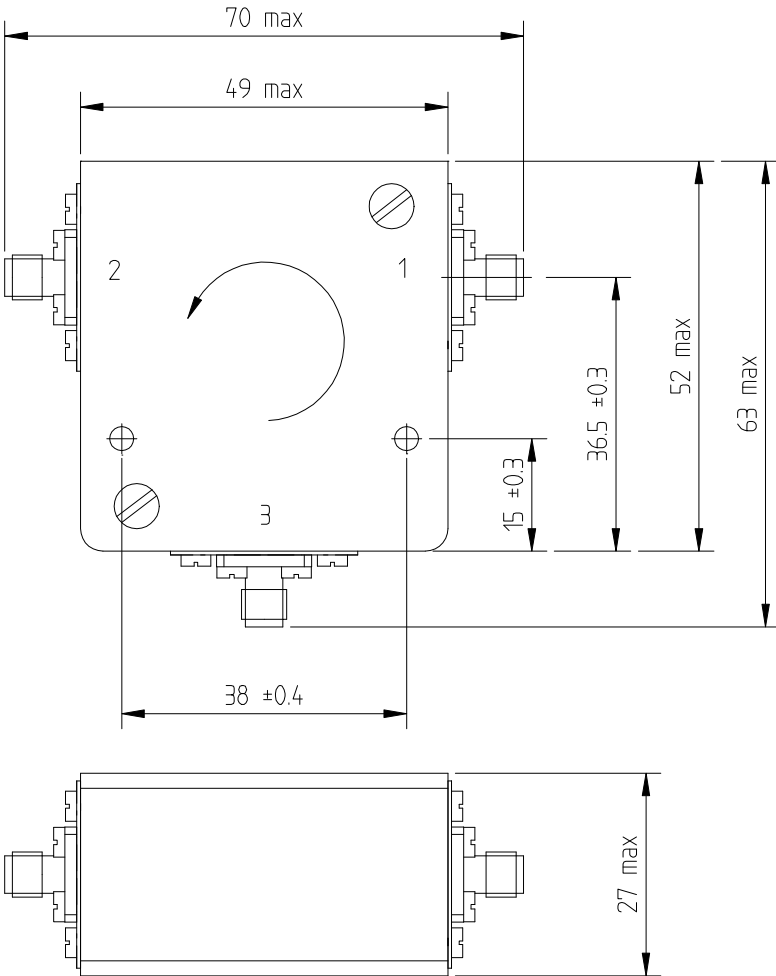


		Ausgabe	1	Erstellt	17.11.99 Sz																																
		1. Änderung		2. Änderung																																	
 <table><tr><td>Frequency</td><td>:</td><td>610...810MHz</td><td></td></tr><tr><td>Temperature range</td><td>:</td><td>-40 ...-25°C</td><td>-25...+95°C</td></tr><tr><td>Isolation</td><td>:</td><td>min 17dB</td><td>min 20dB</td></tr><tr><td>Insertion loss</td><td>:</td><td>max 0.5dB</td><td>max 0.5dB</td></tr><tr><td>VSWR</td><td>:</td><td>max 1.35</td><td>max 1.25</td></tr><tr><td>Power</td><td>:</td><td>50W cw</td><td>50W cw</td></tr><tr><td>Connectors</td><td>:</td><td>SMA (3xfemale)</td><td></td></tr><tr><td>Dimensions</td><td>:</td><td>49x52x27 mm</td><td></td></tr></table>						Frequency	:	610...810MHz		Temperature range	:	-40 ...-25°C	-25...+95°C	Isolation	:	min 17dB	min 20dB	Insertion loss	:	max 0.5dB	max 0.5dB	VSWR	:	max 1.35	max 1.25	Power	:	50W cw	50W cw	Connectors	:	SMA (3xfemale)		Dimensions	:	49x52x27 mm	
Frequency	:	610...810MHz																																			
Temperature range	:	-40 ...-25°C	-25...+95°C																																		
Isolation	:	min 17dB	min 20dB																																		
Insertion loss	:	max 0.5dB	max 0.5dB																																		
VSWR	:	max 1.35	max 1.25																																		
Power	:	50W cw	50W cw																																		
Connectors	:	SMA (3xfemale)																																			
Dimensions	:	49x52x27 mm																																			
M 1 : 1	Art		Circulator		Artikel-Nr. 2722 162 05621																																
	Typ		VAH 562		Blatt-Nr.																																
bearbeitet :		geprüft :		 Bauelemente GmbH, Hamburg																																	