


	Ausgabe 1	Erstellt 3.11.99 Sz
	1. Änderung	2. Änderung

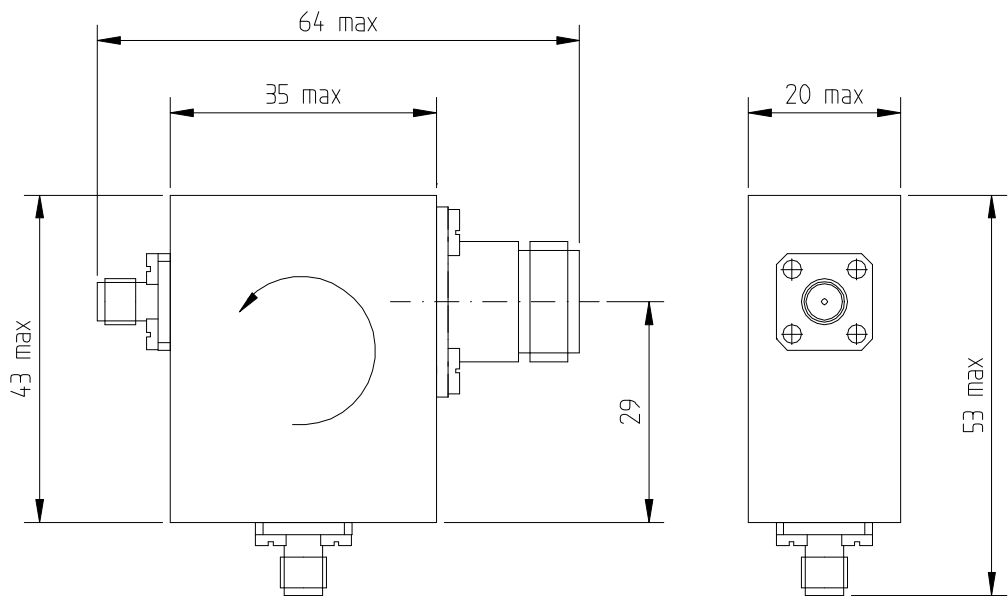

Frequency : 1700...2100MHz
 Isolation : min 23dB
 Insertion loss : max 0.3dB
 VSWR : max 1.10
 Power : 15W cw
 Temperature range : -10 ...+70°C
 Operating at > 5cm from magnetic material and
 > 2 cm distance back to back
 Connectors : N(1xfemale), SMA(2xfemale)
 Dimensions : 35x43x20 mm

	Art	Circulator	Artikel-Nr.	2722 162 05791
	Typ	VAT 579	Blatt-Nr.	
bearbeitet :		geprüft :	Bauelemente GmbH, Hamburg	