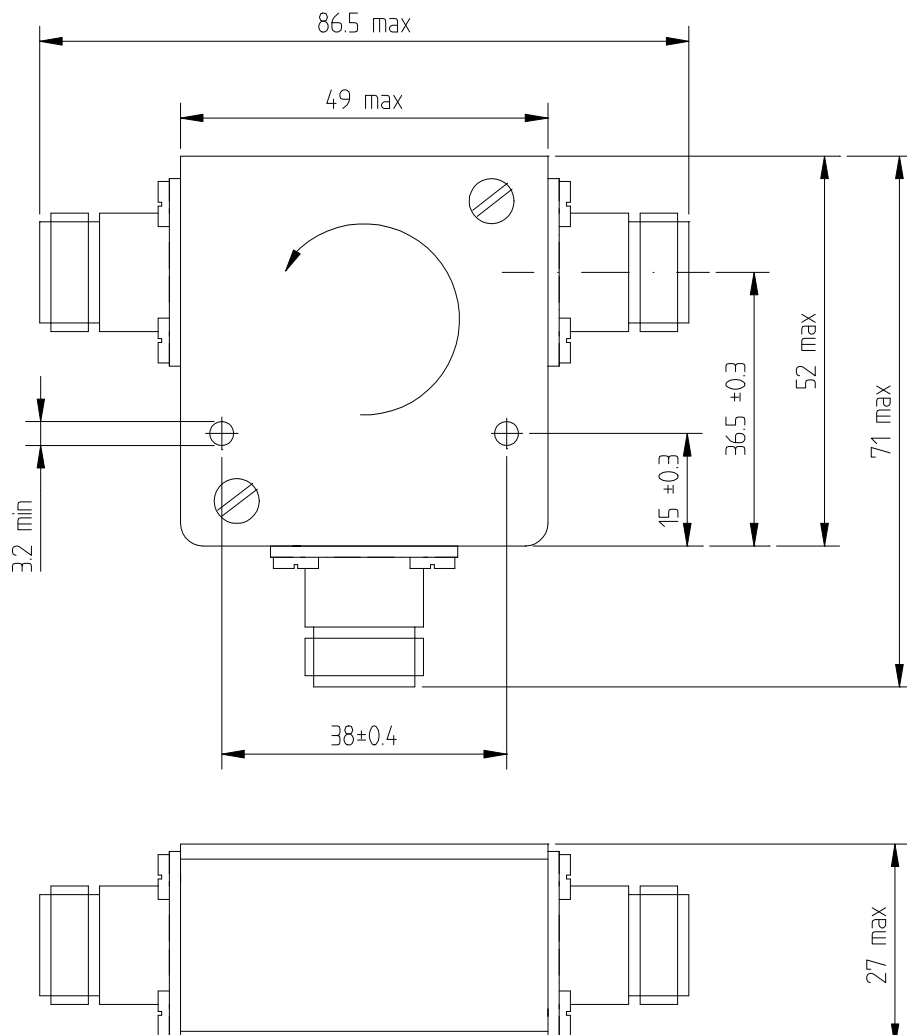


		Ausgabe	1	Erstellt	18.11.99 Sz																																
		1. Änderung		2. Änderung																																	
 Technical drawing of a circulator. The top view shows a rectangular component with dimensions: 86.5 max (width), 49 max (inner width), 32 min (left mounting distance), 38±0.4 (bottom mounting distance), 15 ±0.3 (bottom mounting offset), 36.5 ±0.3 (right mounting offset), 52 max (right mounting distance), and 71 max (total right mounting distance). A curved arrow indicates clockwise rotation. The side view shows a height of 27 max. <table><tr><td>Frequency</td><td>:</td><td>470...610MHz</td><td></td></tr><tr><td>Temperature range</td><td>:</td><td>0 ...+60°C</td><td>+60...+80°C</td></tr><tr><td>Isolation</td><td>:</td><td>min 18dB</td><td>min 15dB</td></tr><tr><td>Insertion loss</td><td>:</td><td>max 0.4dB</td><td>max 0.4dB</td></tr><tr><td>VSWR</td><td>:</td><td>max 1.35</td><td>max 1.45</td></tr><tr><td>Power</td><td>:</td><td>200W cw</td><td>200W cw</td></tr><tr><td>Connectors</td><td>:</td><td>N (3xfemale)</td><td></td></tr><tr><td>Dimensions</td><td>:</td><td>52x49x27 mm</td><td></td></tr></table>						Frequency	:	470...610MHz		Temperature range	:	0 ...+60°C	+60...+80°C	Isolation	:	min 18dB	min 15dB	Insertion loss	:	max 0.4dB	max 0.4dB	VSWR	:	max 1.35	max 1.45	Power	:	200W cw	200W cw	Connectors	:	N (3xfemale)		Dimensions	:	52x49x27 mm	
Frequency	:	470...610MHz																																			
Temperature range	:	0 ...+60°C	+60...+80°C																																		
Isolation	:	min 18dB	min 15dB																																		
Insertion loss	:	max 0.4dB	max 0.4dB																																		
VSWR	:	max 1.35	max 1.45																																		
Power	:	200W cw	200W cw																																		
Connectors	:	N (3xfemale)																																			
Dimensions	:	52x49x27 mm																																			
	Art	Circulator		Artikel-Nr. 2722 162 07651																																	
	Typ	VAF 765		Blatt-Nr.																																	
bearbeitet :		geprüft :		 Bauelemente GmbH, Hamburg																																	