


	Ausgabe 1	Erstellt 24.11.99 Sz
	1. Änderung	2. Änderung

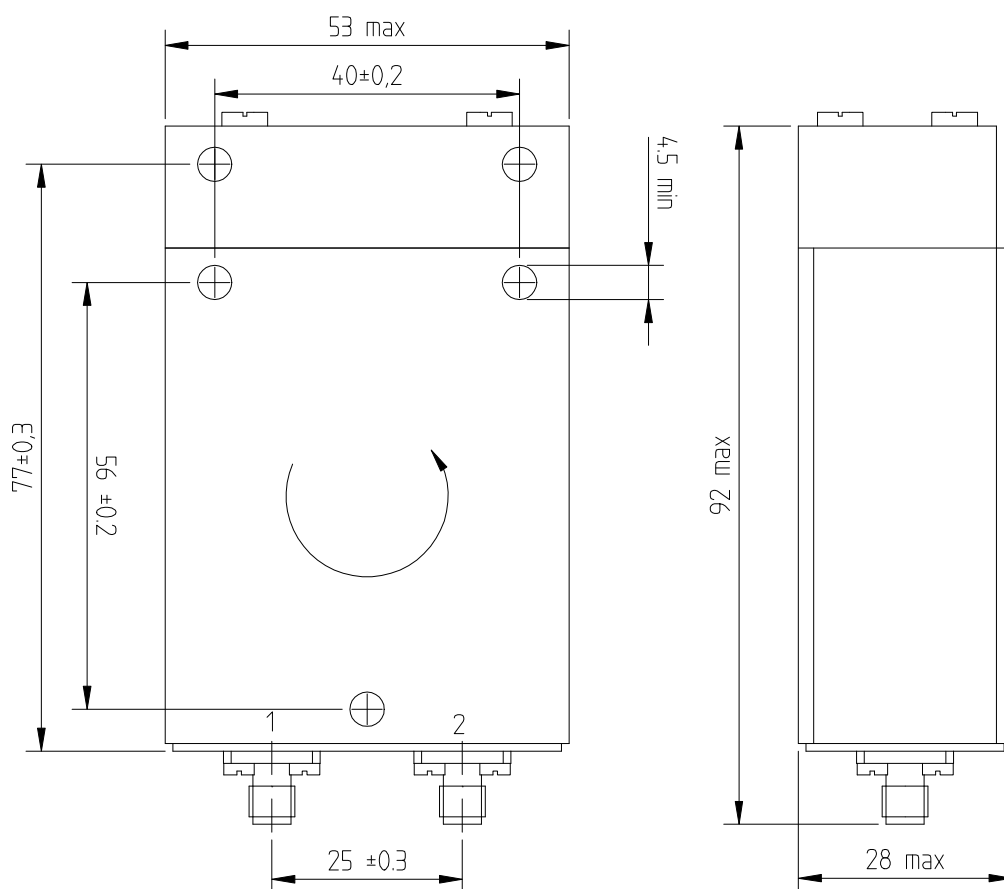

Frequency	:	225...400MHz		
Temperature range	:	-40 ...-20°C	-20...0°C	0...+60°C
Isolation	:	min 14dB	16dB	17dB
Insertion loss	:	max 0,7dB	max0,6dB	max0,6dB
VSWR	:	max 1,5	max1,4	max1,3
Power	:	230W cw (30sec Warm up time)		
Power in load	:	60W		
Connectors	:	SMA (2xfemale)		
Dimensions	:	53x82x28 mm		

M 1 : 1	Art	Isolator	Artikel-Nr.	2722 162 0877 1
	Typ	VFD 877	Blatt-Nr.	
bearbeitet :		geprüft :	 Bauelemente GmbH, Hamburg	