


Datei:	Ausgabe 1	Erstellt 7.03.2000 Sz
	1. Änderung	2. Änderung

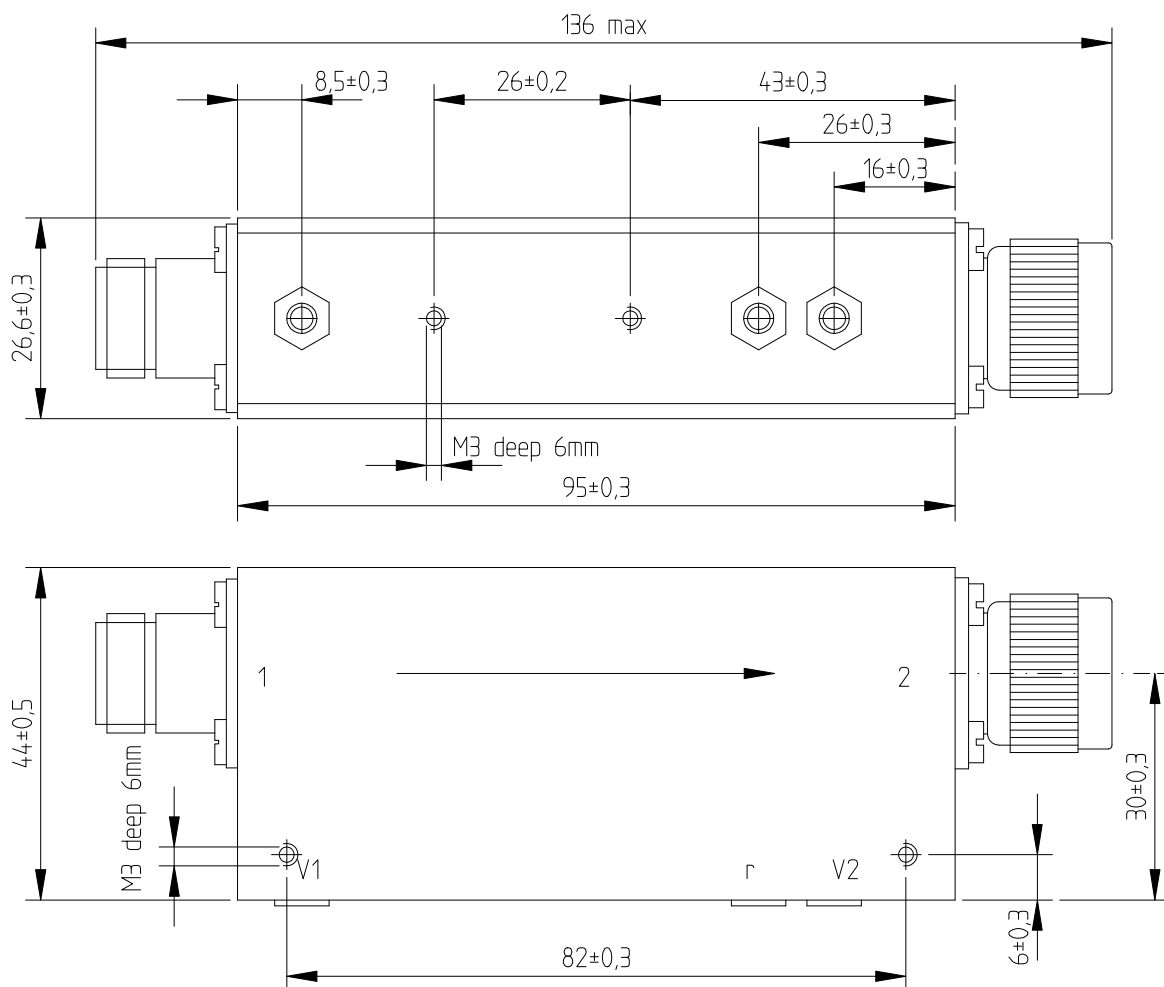

Frequency	:	869...894MHz
Isolation	:	min 50dB
Insertion loss	:	max 0.5dB
VSWR	:	max 1.20
Power	:	40W cw,load 40W (1 minute)
Monitor 1	:	coupling 25±1dB, directivity >45dB
Monitor 2	:	coupling 25±1dB, directivity 20dB
Reflected wave	:	coupling 25±1dB
Intermodulation	:	<70dBbelow 4W
Temperature range	:	+10 ...+35°C
Connectors	:	N (1 x female, 1 x male),Monitore: MCX (3 x female)
Dimensions	:	95x44x26,6 mm

M 1 : 1	Art	Isolator	Artikel-Nr.	2722 162 0882 1
	Typ	VQI 882	Blatt-Nr.	
bearbeitet :		geprüft :	Bauelemente GmbH, Hamburg	