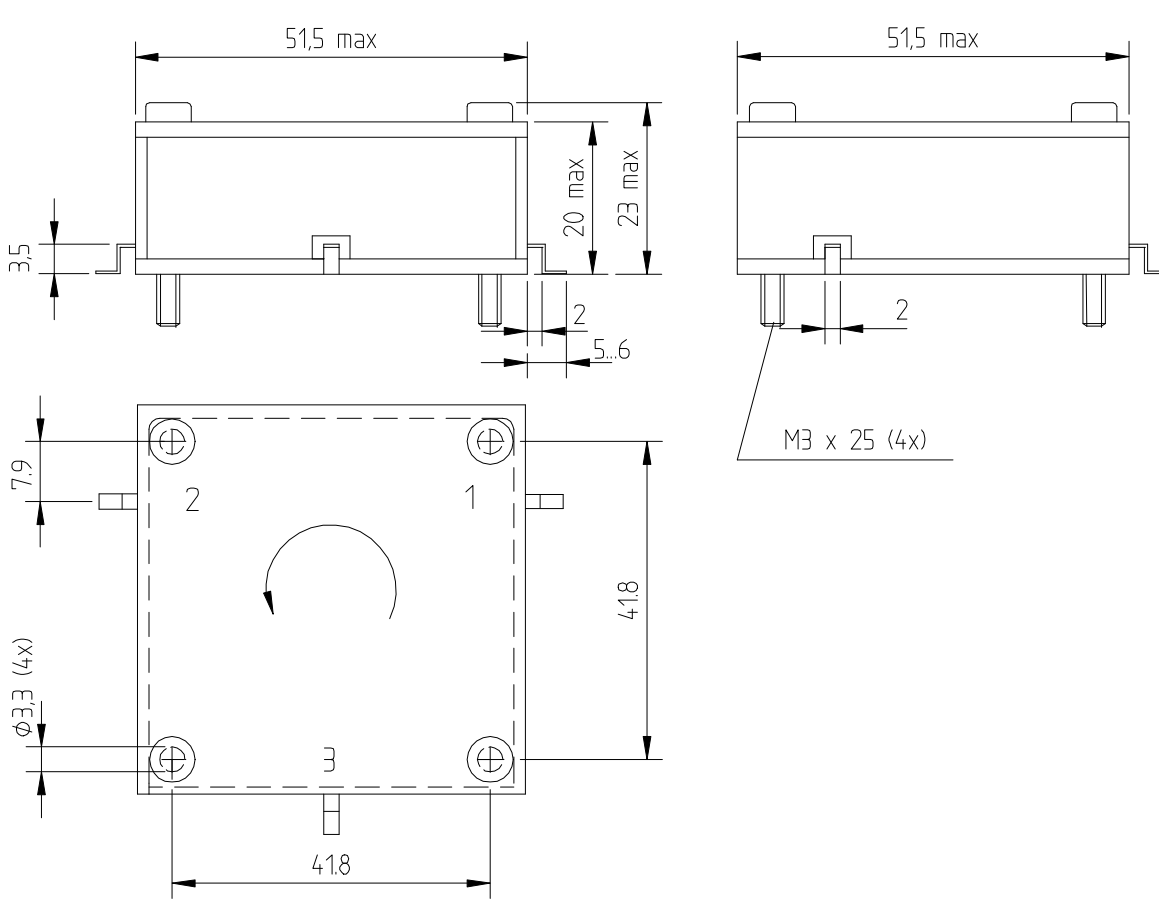


Datei:		Ausgabe	1	Erstellt	10.01.2000 Sz
		1. Änderung		2. Änderung	
 Technical drawing of a circulator showing top, side, and bottom views with dimensions. Top view dimensions: 51,5 max (width), 41,8 (length), 20 max (height), 23 max (height), 3,5 (width), 2 (width), 5..6 (width), 7,9 (width), 41,8 (length), 41,8 (length), 2 (width), 1 (width), 3 (width), 2 (width), 3,3 (4x) (width), 7,9 (width). Side view dimensions: 51,5 max (width), 20 max (height), 23 max (height), 2 (width), 5..6 (width). Bottom view dimensions: 41,8 (length), 41,8 (length), 2 (width), 1 (width), 3 (width), 2 (width), 3,3 (4x) (width), 7,9 (width). Mounting holes: M3 x 25 (4x).					
Frequency : 207...240MHz Bandwidth : min 6MHz (in circuit 1) Isolation : min 20dB Insertion loss : max 0.40dB VSWR : max 1.20 Power at input : 200W max Temperature range : 0 ...+60°C Connectors : 3x Strip line tanbs Dimensions : 51.5x51.5x20 mm Mounting : Torque 0,6Nm					
M 1 : 1	Art	Zirculator		Artikel-Nr. 2722 162 1043 1	
	Typ	VJC 1043		Blatt-Nr.	
bearbeitet :		geprüft :		 Bauelemente GmbH, Hamburg	