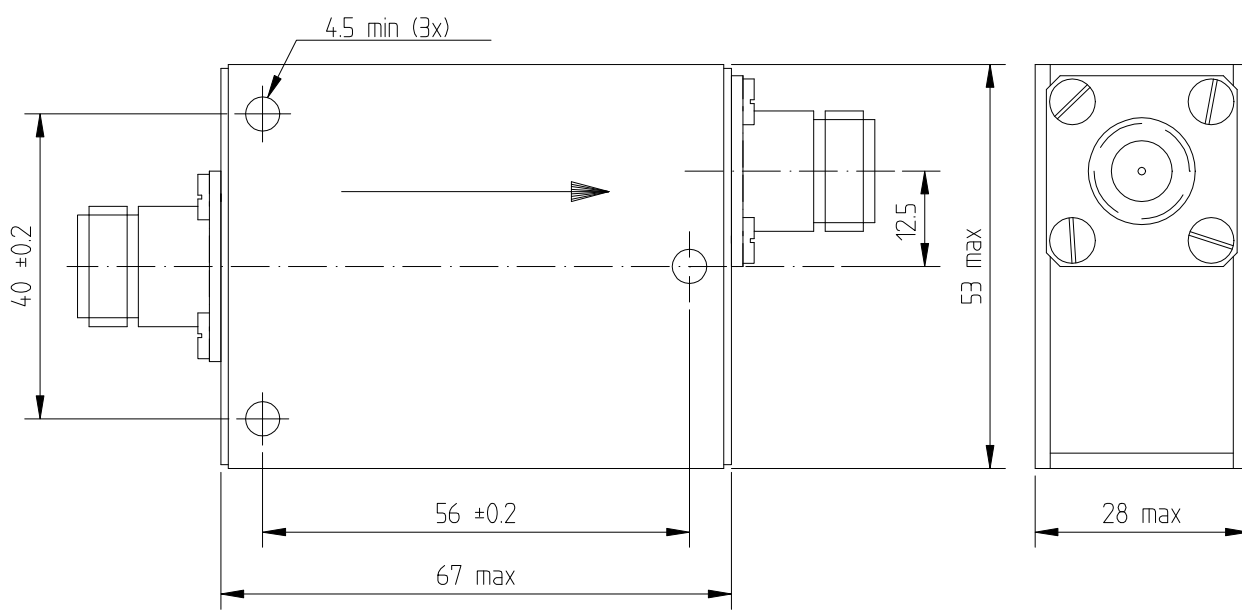


	Ausgabe	1	Erstellt	28.06.99 Mz																								
	1. Änderung		2. Änderung																									
 <table><tr><td>Frequency</td><td>:</td><td>231.5 ±1.5MHz</td></tr><tr><td>Isolation</td><td>:</td><td>min 25 dB</td></tr><tr><td>Insertion loss</td><td>:</td><td>max 0.6 dB</td></tr><tr><td>Port reflection (50Ω)</td><td>:</td><td>max -30dB</td></tr><tr><td>Power</td><td>:</td><td>0.5 W</td></tr><tr><td>Temperature range</td><td>:</td><td>22° ±5°C</td></tr><tr><td>Connectors</td><td>:</td><td>N (2xfemale)</td></tr><tr><td>Dimensions</td><td>:</td><td>67x53x28 mm</td></tr></table>					Frequency	:	231.5 ±1.5MHz	Isolation	:	min 25 dB	Insertion loss	:	max 0.6 dB	Port reflection (50Ω)	:	max -30dB	Power	:	0.5 W	Temperature range	:	22° ±5°C	Connectors	:	N (2xfemale)	Dimensions	:	67x53x28 mm
Frequency	:	231.5 ±1.5MHz																										
Isolation	:	min 25 dB																										
Insertion loss	:	max 0.6 dB																										
Port reflection (50Ω)	:	max -30dB																										
Power	:	0.5 W																										
Temperature range	:	22° ±5°C																										
Connectors	:	N (2xfemale)																										
Dimensions	:	67x53x28 mm																										
M=1:1	Art	Isolator		Artikel-Nr.	2722 162 10591																							
	Typ	VFC1059		Blatt-Nr.																								
bearbeitet :		geprüft :		 Bauelemente GmbH, Hamburg																								