

2.125/2.5 Gbps 850 nm VCSEL LC-TOSA (*Preliminary*)

Product Description:

The LuxNet VG2A-9100 LC-TOSA (Transmitter Optical Sub-Assembly) is designed for high speed, high performance LC-TOSA data communication and telecommunication applications. This device is integrated with an 850 nm VCSEL, TO header, and plastic port. The product is designed for 2.125/2.5 Gbps Fibre Channel, Gigabit Ethernet, and ATM/SONET transceiver modules and systems. The LC type plastic port can be integrated with different types of ports that can be engaged with a fiber connector to provide good coupling efficiency as light generated by the VCSEL is transmitted into multimode fiber.

Product Specifications:

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min.	Max.	Note
Operating Temperature	T_{op}	$^{\circ}\text{C}$	0	85	
Storage Temperature	T_{stg}	$^{\circ}\text{C}$	- 40	85	
Solder Reflow Temperature				260	10 seconds max.
Forward Current (continuous)	I_{max}	mA		15	
Reverse Voltage	V_r	V		5	
Photodiode Forward Current	I_{pd}	mA		10	

Electro-Optical Characteristics ($T = 25^{\circ}\text{C}$, unless noted otherwise):


Parameter	Symbol	Unit	Min.	Typ	Max.	Test Condition
Threshold Current	I_{th}	mA		2.5	3.5	
I_{th} Temperature Variation	ΔI_{th}	mA	-1.5		1.5	0°C to 85°C
Forward Voltage	V_f	V		2.0	2.2	10 mA
Reverse Voltage	V_r	V	5			-10 μA
Differential Resistance	R_s	Ω		35	50	10 mA
Fiber coupled Slope Efficiency	η	mW/mA	0.03		0.15	10 mA, 50 μm fiber
Slope Efficiency Temp-Coeff.	η_t	$\%/^{\circ}\text{K}$	-0.6			0°C to 85°C , 10 mA
Peak Wavelength	λ_p	nm	830	845	860	10 mA
Spectral Wavelength (RMS)	$\Delta\lambda$	nm		0.45	0.85	10 mA
λ_p Temp-Coeff.	$\Delta\lambda_p$	nm/ $^{\circ}\text{C}$		0.06		10 mA
Rise Time	τ_r	ps		110	150	20-80% $I_{bias} = 7\text{mA}$
Fall Time	τ_f	ps		110	150	20-80% $I_{bias} = 7\text{mA}$
Peak Fiber Coupled Optical Power	P_{oc}	μW		225		7mA peak, 62.5/125 fiber, NA=0.275
Rattle Sensitivity	RA_s	dB			0.5	

Photodiode Characteristics (T = 25°C, unless noted otherwise):

Parameter	Symbol	Unit	Min.	Typ	Max	Test Condition
Monitor Current	I_{pd}	mA	0.1		0.58	$P_{oc} = 0.4 \text{ mW}$
Dark Current	I_d	nA			20	$P_{oc} = 0, V_r = 3V @ 25^\circ C$
PD Reverse Volt	BVR_{pd}	V	30	115		$P_o = 0, I_r = 10\mu A$
PD Capacitance	C	pF			100	$V_r = 0 @ 1\text{MHz}$
		pF			55	$V_r = 3V @ 1\text{MHz}$

Dimensions: (mm)

All dimensions are nominal

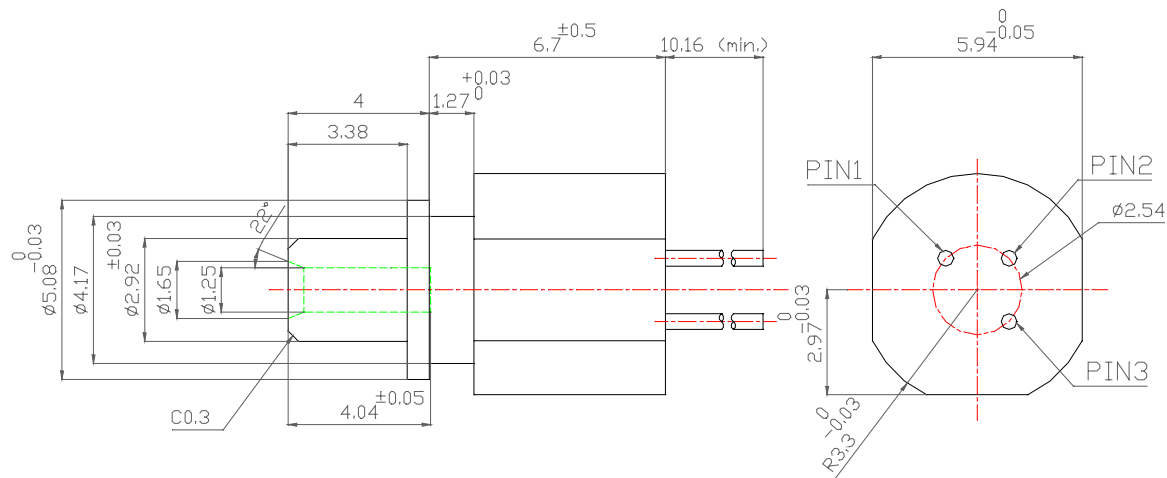

PINOUT

VG2A-9100 -1		VG2A-9100 -2	
Number	Function	Number	Function
1	VCSEL Anode	1	VCSEL Cathode
2	VCSEL Cathode & Photodiode Anode	2	VCSEL Anode & Photodiode Cathode
3	Photodiode Cathode	3	Photodiode Anode