

GENERAL DESCRIPTION

The XRT84V24 Quad E1 Framer IC contains four independent E1 Framer blocks. Each E1 Framer block contains its own Transmit and Receive E1 Framing function, Transmit HDLC Controller (which encapsulates contents of Transmit HDLC Buffers into LAPD Message frames) and Receiver HDLC Controller (which extracts payload content of "Receive LAPD Message" frames from the incoming E1 data stream and writes it into the Receive HDLC Buffer). Each framer also contains a Transmit and Overhead Input port, which permits "Data Link" Terminal equipment direct access to the outbound E1 frames and a Receive Overhead Output port, which permits "Data Link" Terminal equipment direct access to the "Data Link" bits within the inbound E1 frames.

FEATURES

- Four independent, ITU-T G.704 compliant Transceiver E1 Framers
- Supports Channel Associated Signaling
- Supports Common-Channel and Primary Rate ISDN Signaling
- Supports FAS, CRC-Multiframe and CAS Multiframe framing structures
- Contains two 96 byte Transmit HDLC Buffers and two 96 byte Receive HDLC buffers for each channel

- Contains Microprocessor Interface for popular types of Microprocessors and supports Programmed I/O, Burst and DMA modes of Read/Write access
- Each framer block can encode or decode the E1 Frame data into/from the Single-Rail or Dual-Rail (AMI or HDB3 encoded) formats
- Detects and forces RAI and AIS Alarms
- Detects LOF, COFA and LOS conditions
- Each Framer Contains a 512 bit Elastic Store Buffer
- Uses a Single +3.3V Power Supply
- Available in either a 160 pin PQFP and 208 pin PQFP package

APPLICATIONS

- SDH terminal or add/drop multiplexers supporting E1 framing
- E1 multiplexers
- Channel Service Units (CSUs)
- LAN routers with integrated E1 interfaces
- E1 Frame Relay Interface
- ISDN Primary Rate Interfaces
- Test Equipment

FIGURE 1. BLOCK DIAGRAM OF THE XRT84V24

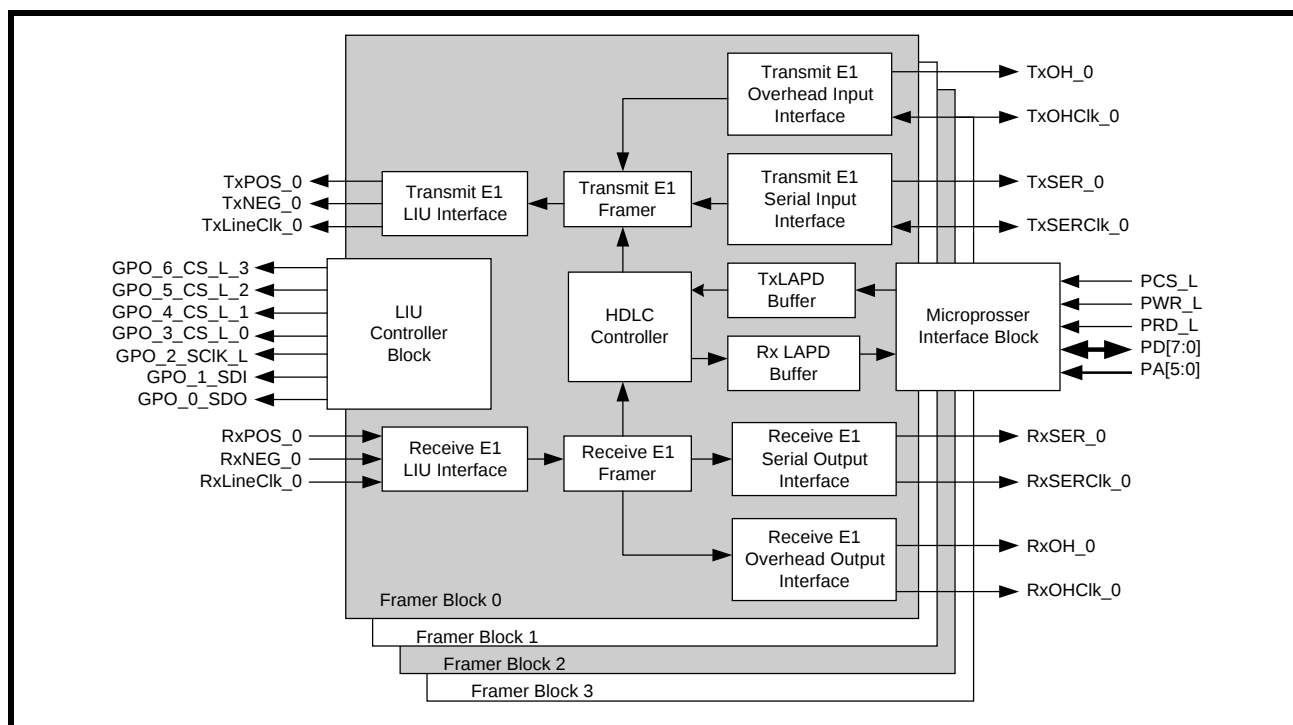


FIGURE 2. PIN OUT OF THE XRT84V24 IN THE 160 PIN PQFP PACKAGE


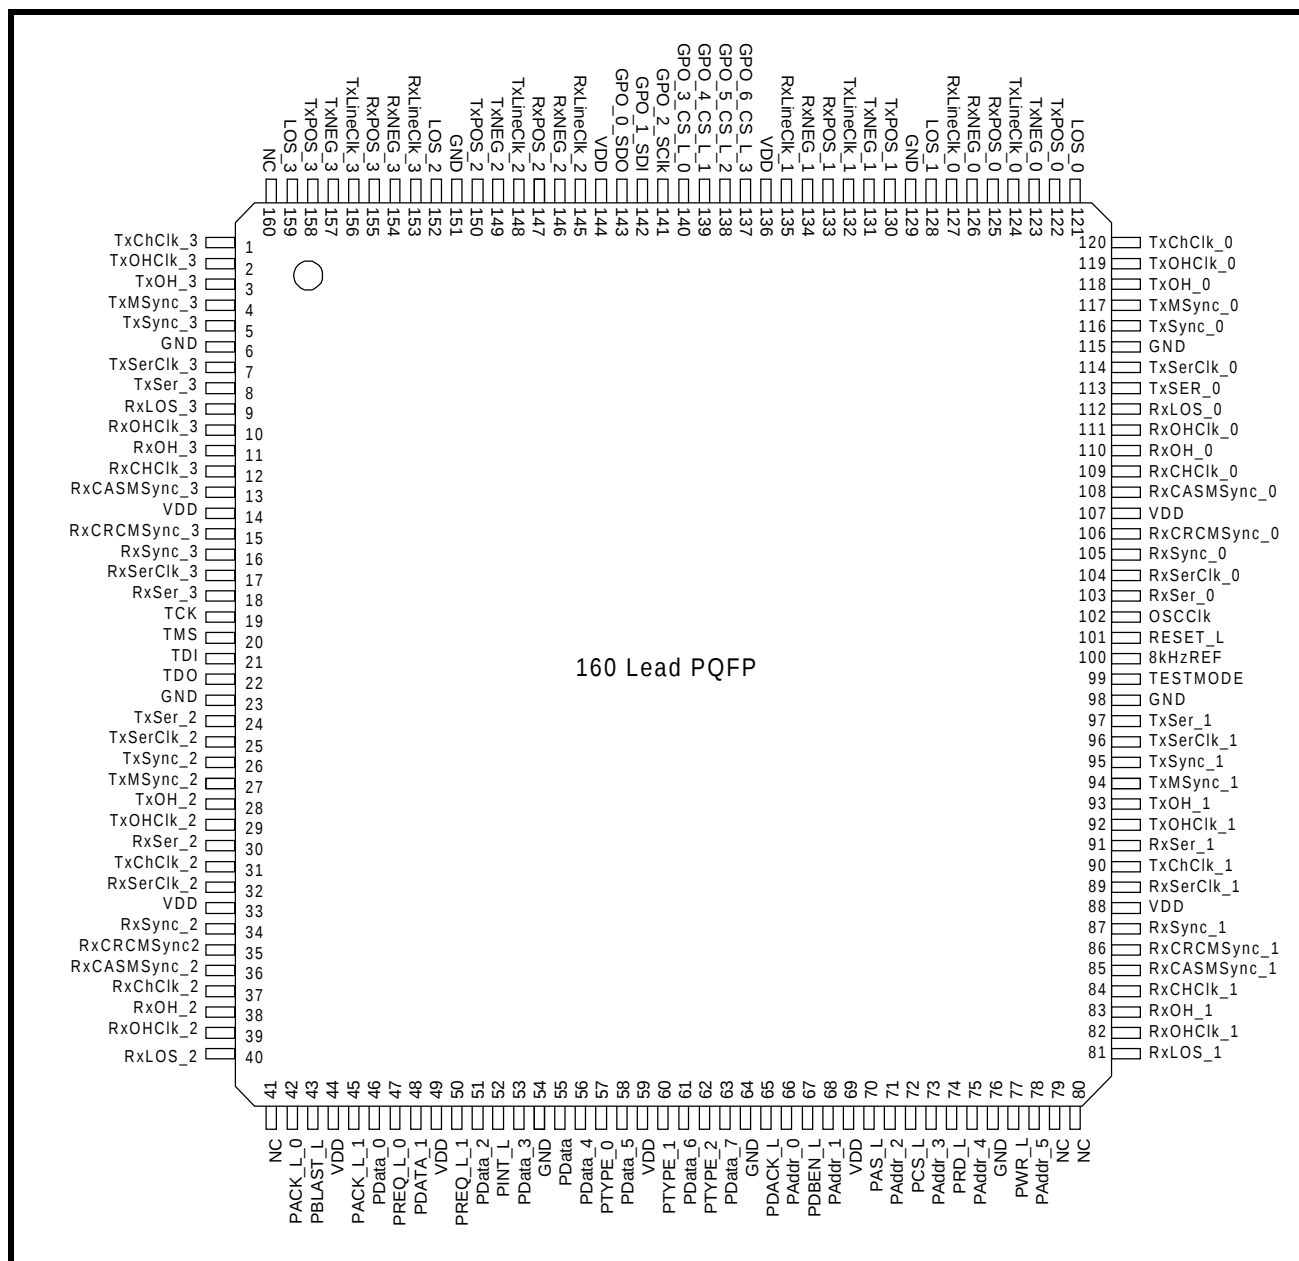


FIGURE 3. PIN OUT OF THE XRT84V24 IN THE 208 PIN PQFP PACKAGE

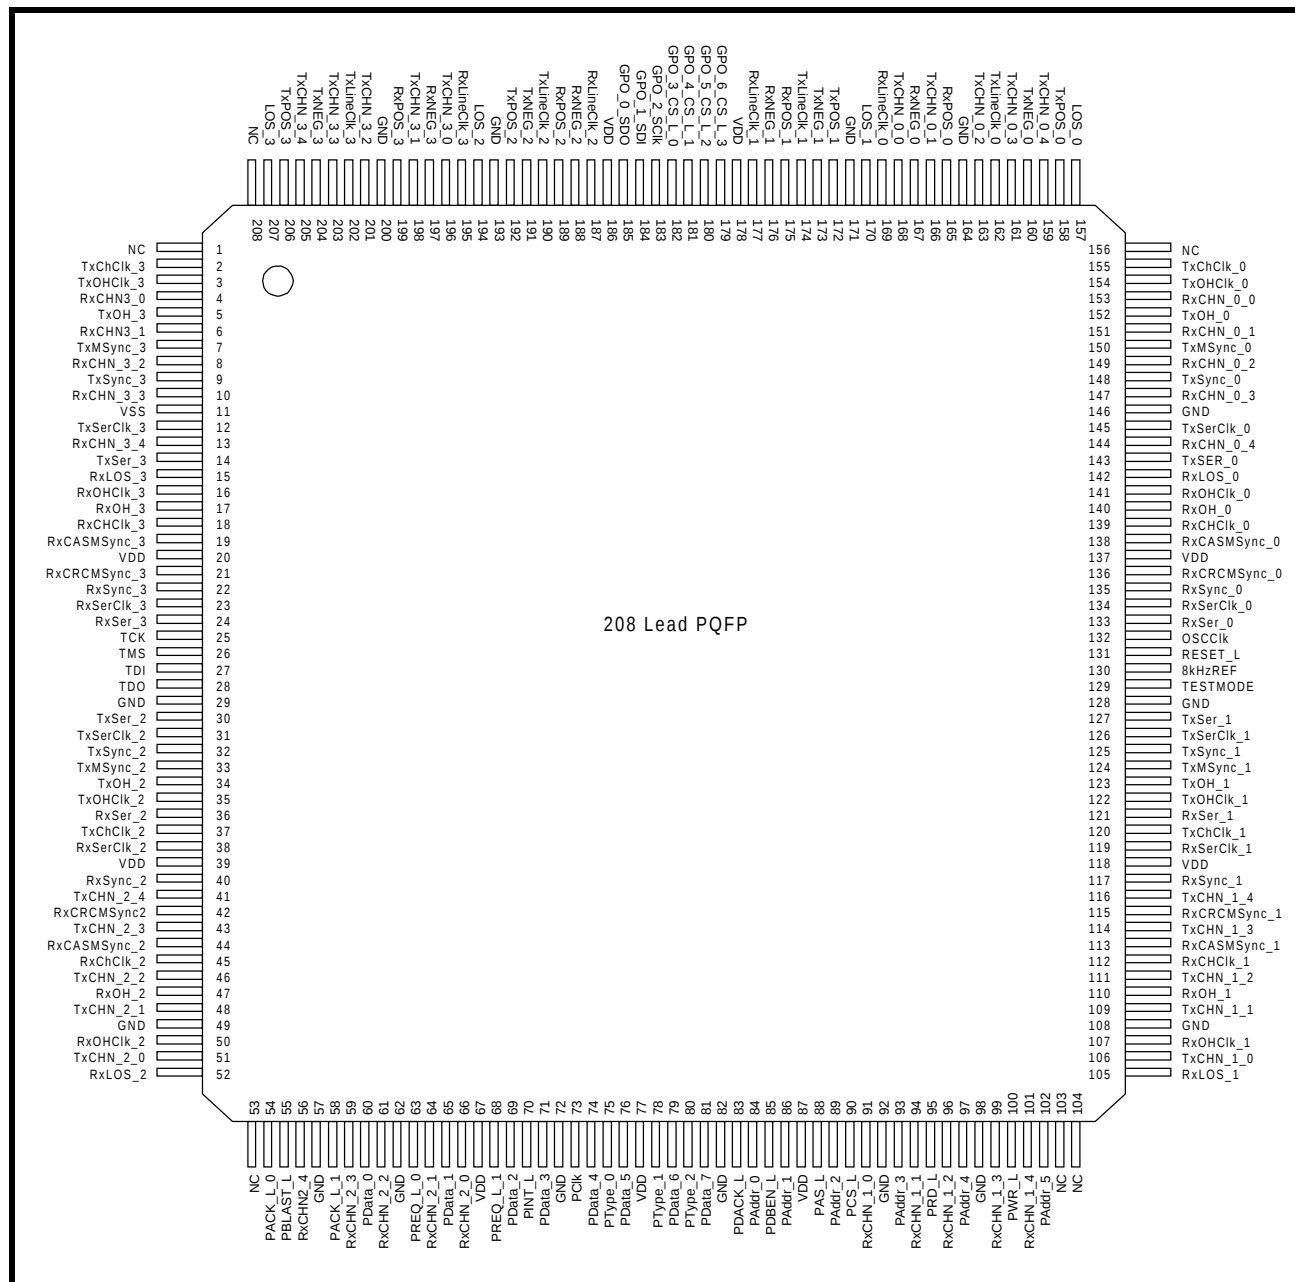

ORDERING INFORMATION


PART NUMBER	PACKAGE	OPERATING TEMPERATURE RANGE
XRT84V24V-208	208 Lead PQFP	-40°C to +85°C
XRT84V24V-160	160 Lead PQFP	-40°C to +85°C

REV. 1.0.1

PACKAGE DIMENSIONS

160 LEAD PLASTIC QUAD FLAT PACK
(28 mm x 28 mm, QFP)

Rev. 1.00

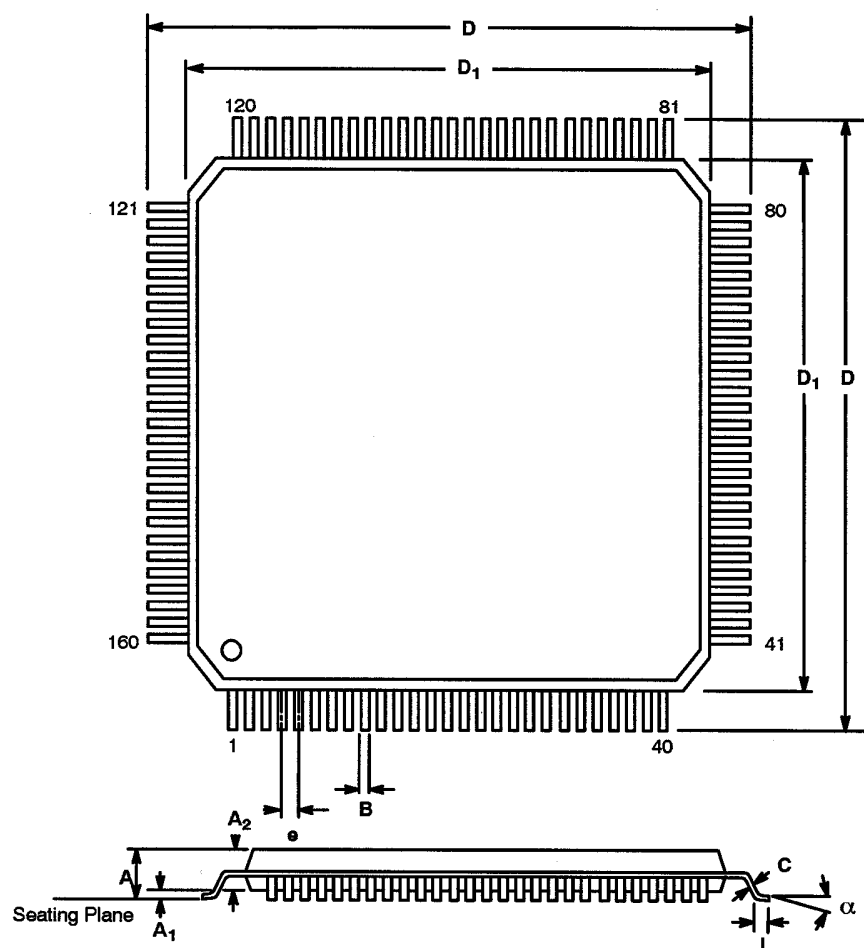


SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.127	0.160	3.22	4.07
A ₁	0.002	0.016	0.05	0.40
A ₂	0.125	0.144	3.17	3.67
B	0.009	0.015	0.22	0.38
C	0.005	0.009	0.13	0.23
D	1.218	1.238	30.95	31.45
D ₁	1.098	1.106	27.90	28.10
e	0.0256 BSC		0.65 BSC	
L	0.029	0.040	0.73	1.03
α	0°	7°	0°	7°

Note: The control dimension is the millimeter column

208 LEAD PLASTIC QUAD FLAT PACK
(28 mm x 28 mm, QFP)

Rev. 1.00

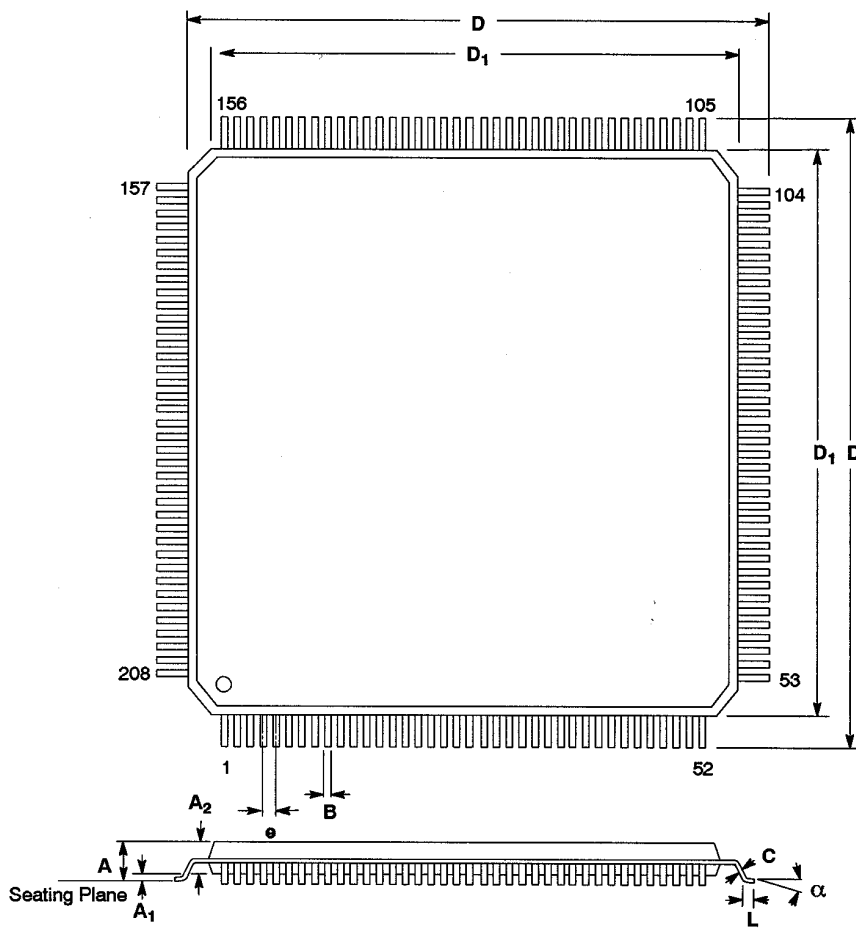

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.128	0.161	3.25	4.10
A ₁	0.002	0.020	0.05	0.50
A ₂	0.126	0.142	3.20	3.60
B	0.007	0.011	0.17	0.27
C	0.004	0.008	0.09	0.20
D	1.197	1.212	30.40	30.80
D ₁	1.098	1.106	27.90	28.10
e	0.0197 BSC		0.50 BSC	
L	0.018	0.030	0.45	0.75
α	0° 8°		0° 8°	

Note: The control dimension is the millimeter column

REVISION HISTORY**NOTICE**

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Copyright 1999 EXAR Corporation

Datasheet October 1999

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.
