Pre-amplified/5V Excitation/Absolute

XFPM,XFAM Data sheet


Features


- · Two accuracy ranks, $\pm 1.5\%$ FS and $\pm 2.5\%$ FS available
- · Volt level output
- · On-chip amplification and temperature compensations
- · Pre-calibration of offset voltage and span

Applications

- · Industrial instrumentation
- · Medical device
- · Barometer, Altimeter
- · Altitude compensation

■Part number for ordering

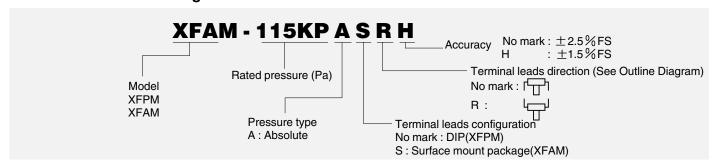

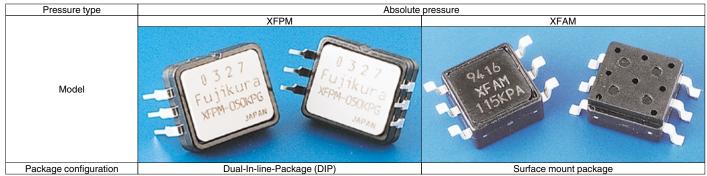

Measurable pressure range (kPa)	Part number for ordering			
15~115	XFPM-115KPA	XFPM-115KPAR	XFAM-115KPASR	
	XFPM-115KPAH	XFPM-115KPARH	XFAM-115KPASRH	


Specifications


Model/Rated pressure	115KPA	115KPAH	Unit			
Recommended operating conditions						
Pressure type	Absolute	_				
Rated pressure	1:	kPa-abs				
Measurable pressure range	15~	kPa⋅abs				
Pressure media	Non-corros	_				
Excitation voltage	5±(VDC				
Absolute maximum rating						
Maximum load pressure	Twice of rat	_				
Maximum excitation voltage	8	VDC				
Operating temperature	-40	C				
Storage temperature	-40	c				
Operating humidity	30~80 (No dev	%RH				
Electric performances/chara	cteristics (Excitation voltage Vcc=5.0V constant, A	mbient temperature Ta=25°C)	·			
Current consumption	less th	mA				
Output impedance	less th	Ω				
Source current	less th	mA				
Sink current	less t	mA				
Mechanical response time	2 (For the	msec				
Full scale span voltage	4	V				
Offset voltage ※	0.2±0.1125	0.2±0.0675	V			
Full scale span voltage 🔆	4.7±0.1125	4.7±0.0675	V			
Accuracy ※	±2.5	±1.5	%FS/0~85℃			

Note ; \slash Excluding input voltage error.




■ Outline dimensions

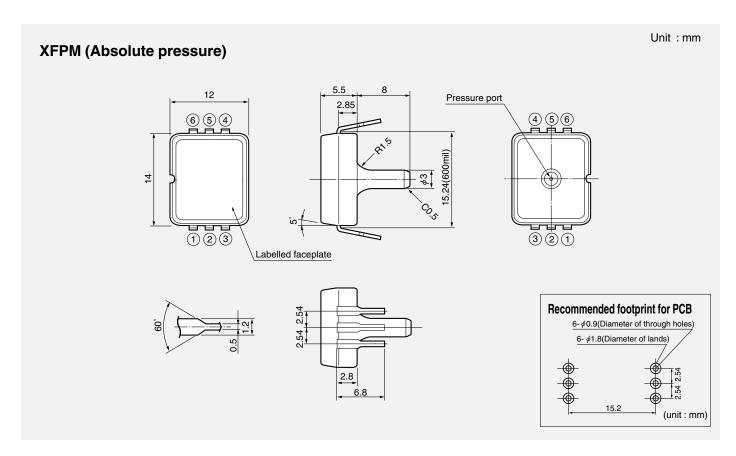

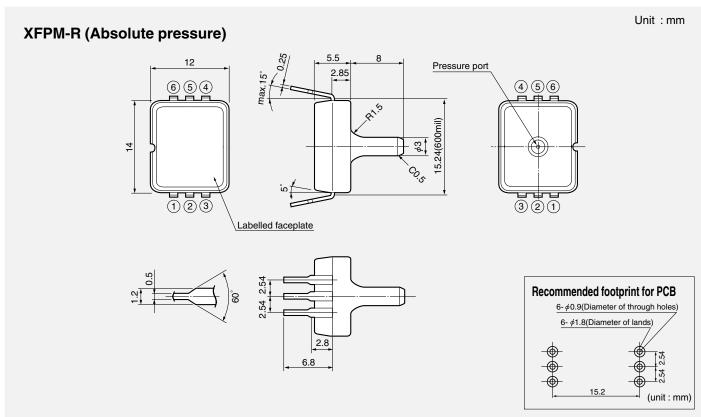





■ Outline dimensions ■

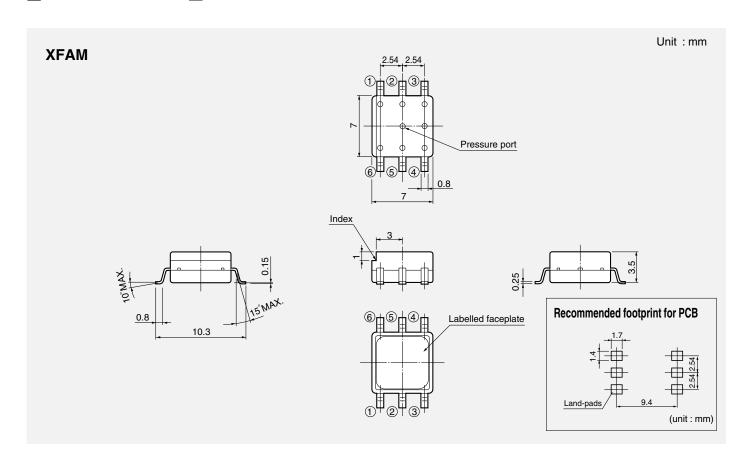



■ Connection diagram

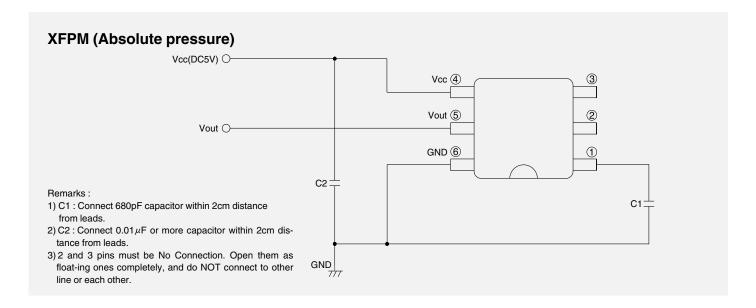

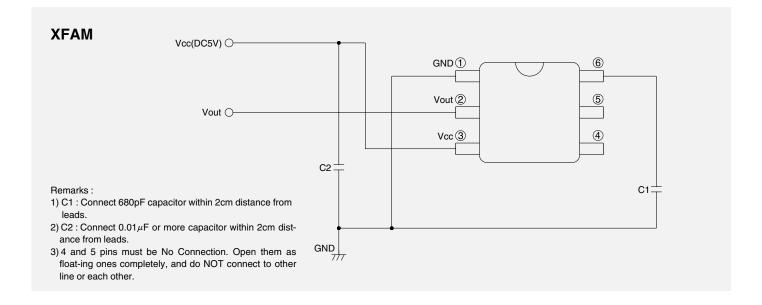

Note; Please read instruction "Notes" before using the sensor.

Fujikura reserves the right to change specifications without notice.

Fujikura Ltd.

If you have any questions regarding technical issues or specifications, please contact us. Sensor Engineering Department 5-1 Kiba 1-chome, Koto-ku, Tokyo 135-8512, Japan Phone +81-(0)3-5606-1072 Fax. +81-(0)3-5606-1538

E-mail: sensor@fujikura.co.jp