

## Part Number: XL-601



### Features

Panel mounting with wire leads  
Continuous and pulsing tones  
Sealed construction


### Electrical Specifications

Operating Temperature Range	-40 to +80 Deg C
Rated Voltage	12 VDC
Operating Voltage	9 to 28 VDC
Current Consumption (typ.)	15 mA
Resonant Frequency	2900 +/- 200 Hz
Sound Pressure Level @ 10 cm (typ.)	106 dBA

Case: ABS, white or red

Weight Flange mount: 3.63 oz. (103 grams)

Weight Panel mount: 2.82 oz. (80 grams)

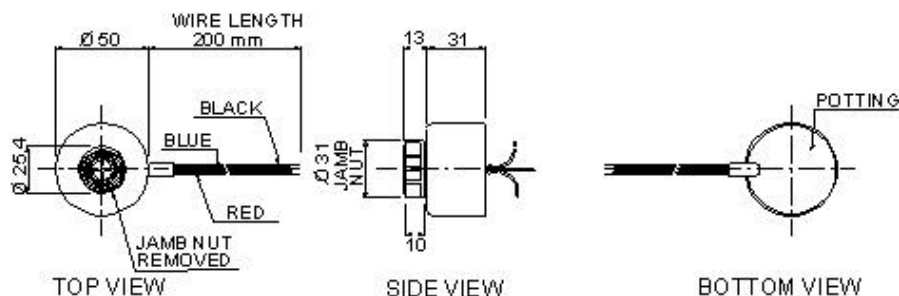

### NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

**For application notes and drawing specifications, please consult [www.projectsunlimited.com](http://www.projectsunlimited.com).**

Specifications subject to change without notice.

© 2002, Projects Unlimited Inc., All Rights Reserved.