




Watch Crystals

Surface Mount 32.768KHz

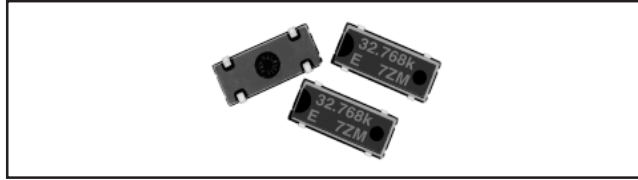

FEATURES

- Miniature package.
- Economical cost.

STANDARD SPECIFICATIONS

Operating Temperature Range: - 40°C to + 85°C.

Frequency Tolerance: ± 20 PPM.

Frequency Stability: - 0.043PPM/°C² maximum.

Nominal Frequency: 25°C to ± 5 °C.


Load Capacitance: 12.5pF.

Drive Level: 1 μ W maximum.

Shunt Capacitance: 1.0pF typical.

Tape and Reel: 3000 pieces.

DIMENSIONAL CONFIGURATIONS [Numbers in brackets indicate millimeters]

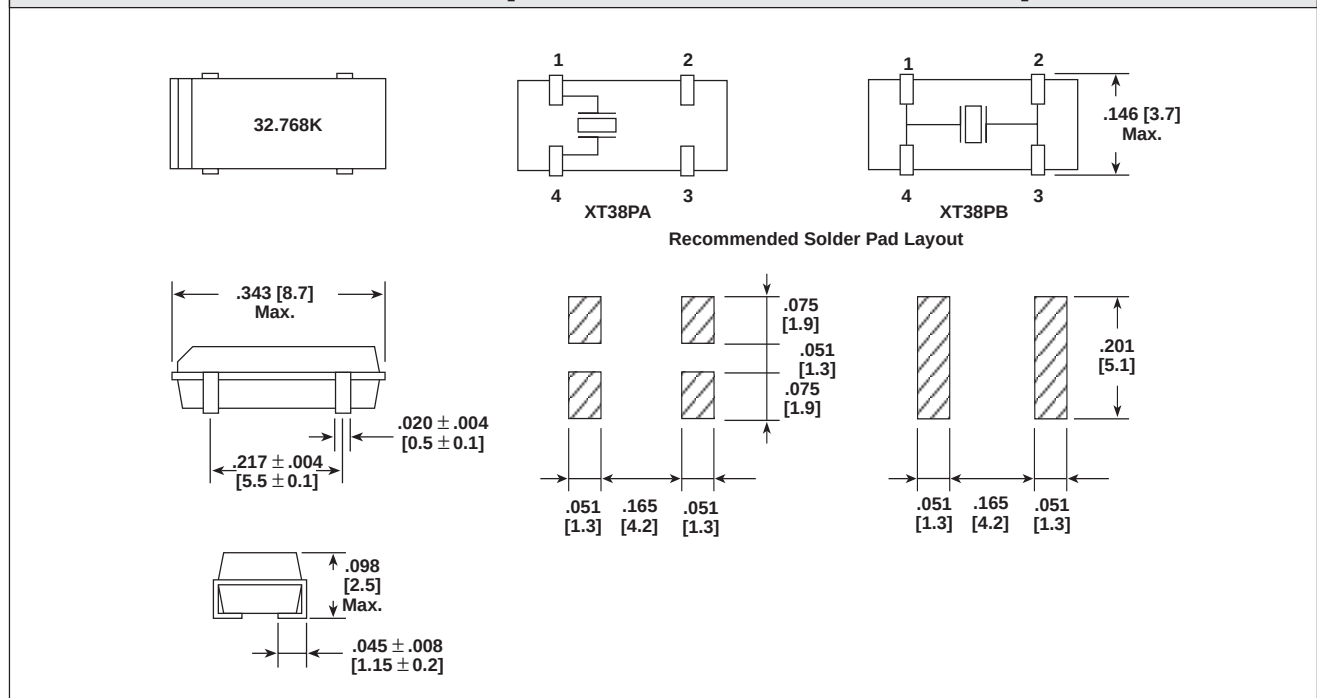

HOW TO ORDER

XT38P MODEL	A PAD LAYOUT	32.768K FREQUENCY/KHz
	A or B	