



- 1 Series name
- 2 Dual output
- 3 Output wattage
- 4 Output voltage

TRC Electronics, Inc.

Authorized Stocking Distributor

Tel: 973.779.8282

Fax: 973.779.1490

Contact TRC for pricing,
stock, and technical assistance.

www.trcelectronics.com

MODEL	YW1512A	YW1515A
MAX OUTPUT WATTAGE[W]	15.6	15.0
DC OUTPUT	+/-12V 0.65A or +24V 0.65A	+/-15V 0.50A or +30V 0.50A

SPECIFICATIONS

	MODEL	YW1512A	YW1515A
INPUT	VOLTAGE[V]	AC85 - 132 1 φ or DC110 - 170	
	CURRENT[A]	ACIN 100V	0.4typ (Io=100%)
	FREQUENCY[Hz]	47 - 440 or DC	
	EFFICIENCY[%]	ACIN 100V	78typ (Io=100%)
	INRUSH CURRENT[A]	ACIN 100V	25typ (Io=100%)
OUTPUT	VOLTAGE[V]	+/-12 (+24)	+/-15 (+30)
	CURRENT[A]	0.65	0.5
	LINE REGULATION[mV]	60max	75max
	LOAD REGULATION[mV]	600max	750max
	RIPPLE[mVp-p]	*2 120max	120max
	RIPPLE NOISE[mVp-p]	*2 150max	150max
	TEMPERATURE REGULATION[mV]	0 to +55°C	150max
	START-UP TIME[ms]	200max (ACIN 85V, Io=100%)	
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	Fixed	
	OUTPUT VOLTAGE SETTING[%]	± 5max (Rated input/output, Ta=25°C)	
PROTECTION CIRCUIT	HOLD-UP TIME[ms]	10typ (ACIN 85V, Io=100%)	
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically	
	ISOLATION		
ISOLATION	INPUT-FG, OUTPUT	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩmin (At Room Temperature)	
	OUTPUT-FG	AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩmin (At Room Temperature)	
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	-10 to +70°C, 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max	
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max	
	VIBRATION	10 - 55Hz, 98.0m/s ² (10G), 3minutes period, 30minutes each along X, Y and Z axis	
	IMPACT	490.3m/s ² (50G), 11ms, once each X, Y and Z axis	
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL1950, C-UL	
	CONDUCTED NOISE	Complies with FCC-B	



*1 Output pins can be connected in series to make a 24V/30V out put.

*2 Measured by 20MHz oscilloscope.

* The output specification is at ± 12V and ± 15V.

* Parallel operation with other model is not possible.


External view

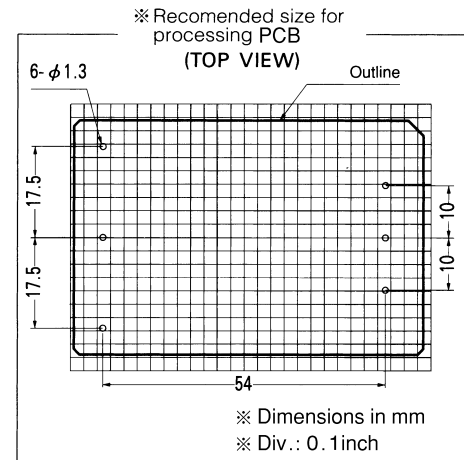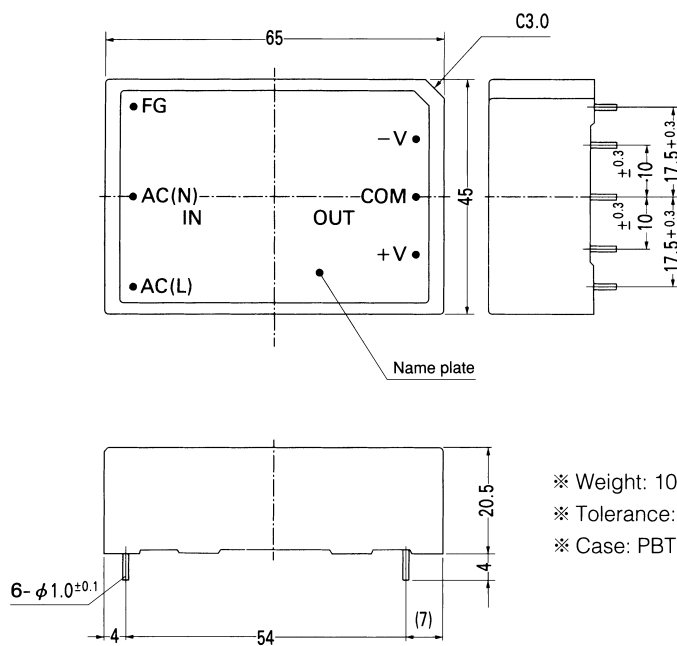


- ※ Weight: 100g or less
- ※ Tolerance: ± 0.5
- ※ Case: PBT

Performance data


■ STATIC CHARACTERISTICS (YW1512A)

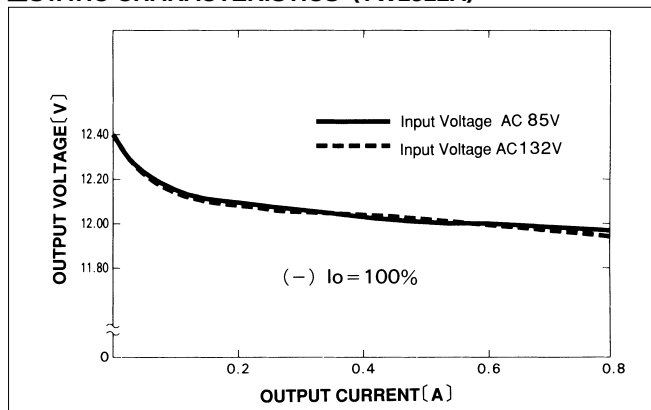

■ RISE TIME & FALL TIME (YW1512A: +12V)

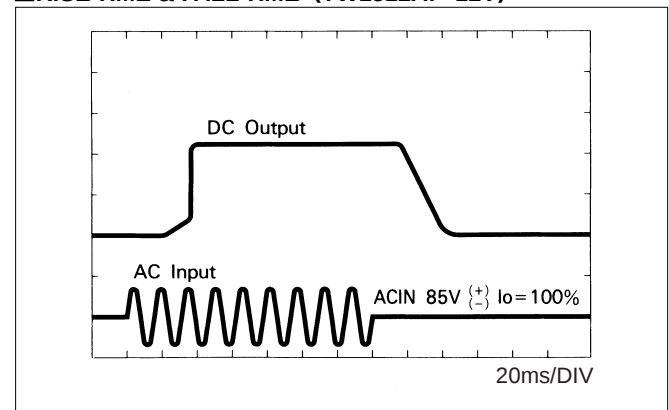

■ OVERCURRENT CHARACTERISTICS (YW1512A)

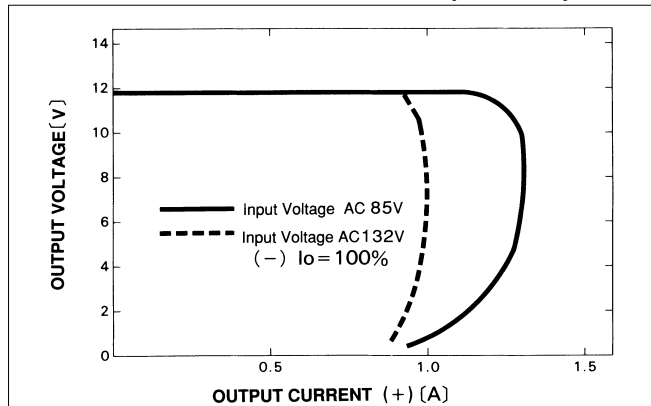

■ DERATING CURVE

