

1 Series name
2 Single output
3 Output wattage
4 Output voltage
5 UL recognized, TuV approved CSA certified: E

TRC Electronics, Inc.

Authorized Stocking Distributor

Tel: 973.779.8282

Fax: 973.779.1490

Contact TRC for pricing,
stock, and technical assistance.

www.trcelectronics.com

MODEL	YAS1005	YAS1012
MAX OUTPUT WATTAGE[W]	10.0	10.8
DC OUTPUT	5V 2.0A	12V 0.9A



SPECIFICATIONS

	MODEL	YAS1005	YAS1012
INPUT	VOLTAGE[V]	AC85 - 264 1φ or DC110 - 370	
	CURRENT[A]	ACIN 200V	0.14typ (Io=100%)
	FREQUENCY[Hz]	47 - 440 or DC	
	EFFICIENCY[%]	70typ	72typ
	INRUSH CURRENT[A]	ACIN 100V	20typ (Io=100%)
OUTPUT		ACIN 200V	40typ (Io=100%)
	VOLTAGE[V]	5	12
	CURRENT[A]	2	0.9
	LINE REGULATION[mV]	20max	48max
	LOAD REGULATION[mV]	40max	100max
	RIPPLE[mVp-p]	*1 80max	120max
	RIPPLE NOISE[mVp-p]	*1 120max	150max
	TEMPERATURE REGULATION[mV]	0 to +55°C	50max
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	Fixed	
	OUTPUT VOLTAGE SETTING[%]	± 5max (Rated input/output, Ta=25°C)	
ISOLATION	HOLD-UP TIME[ms]	10typ (ACIN 85V, Io=100%)	
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically	
	INPUT-OUTPUT	AC3.000V 1minute, Cutoff current = 15mA, DC500V 50MVA/min (At Room Temperature)	
ENVIRONMENT	INPUT-FG	AC2.000V 1minute, Cutoff current = 10mA, DC500V 50MVA/min (At Room Temperature)	
	OUTPUT-FG	AC500V 1minute, Cutoff current=100mA, DC500V 50MVA/min (At Room Temperature)	
	OPERATING TEMP., HUMID. AND ALTITUDE	-10 to +70°C, 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max	
SAFETY AND NOISE REGULATIONS	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max	
	VIBRATION	10 - 55Hz, 98.0m/s ² (10G), 3minutes period, 60minutes each along X, Y and Z axis	
	IMPACT	490.3m/s ² (50G), 11ms, once each X, Y and Z axis	
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL1950, EN60950, VDE0160, CSA C22.2 No.234 Complies with IEC60950	
	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, Additional capacitors required for meeting VDE-B (External Fuse is required)	

* 1 Measured by 20MHz oscilloscope.


* Parallel operation with other model is not possible.

External view

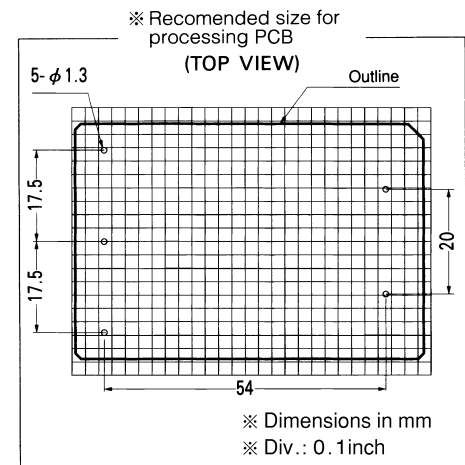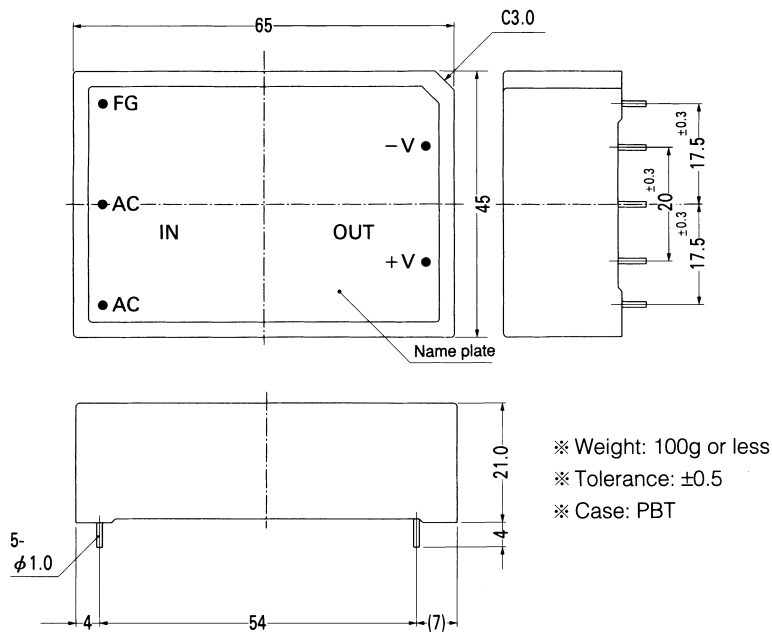


Performance data


STATIC CHARACTERISTICS (YAS1012)

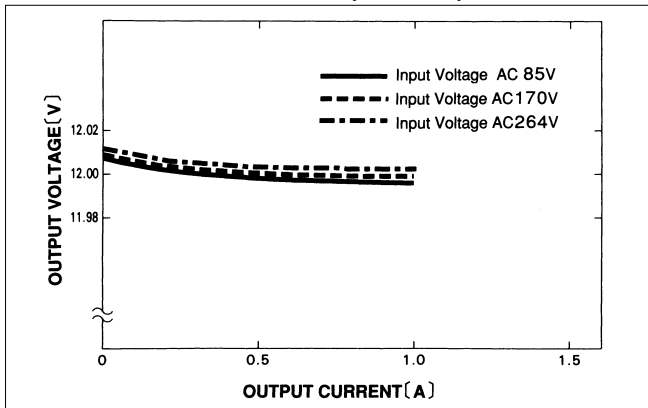

RISE TIME (YAS1012)

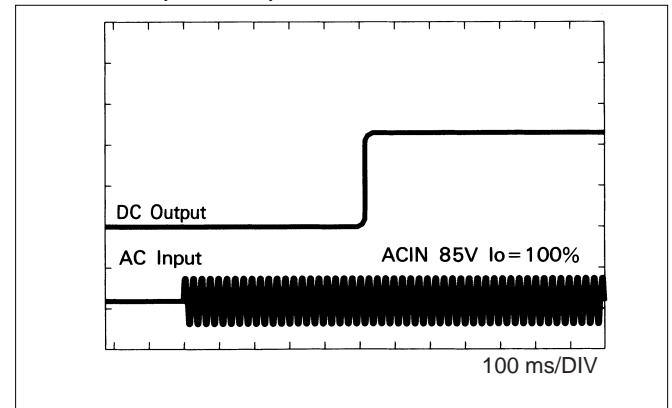

OVERCURRENT CHARACTERISTICS (YAS1012)

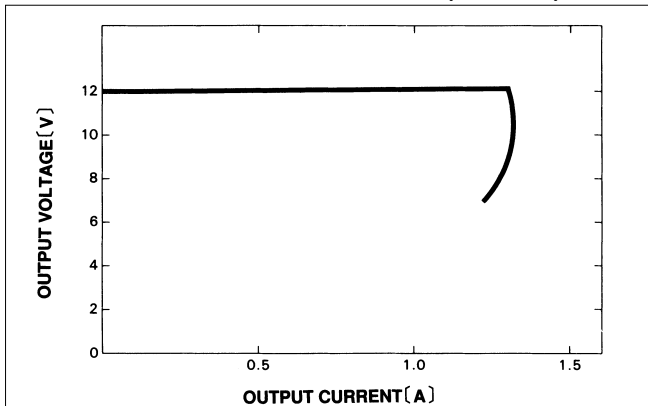

DERATING CURVE

