

Super LLD2 Series

(For PFC circuit)

LOW LOSS SUPER HIGH SPEED RECTIFIER

■ Features

- *Insulated package by fully molding*
- *Super high speed switching*
- *High reliability by planer design*

■ Applications

- *PFC circuit (current discontinuous mode)*

■ Maximum ratings and characteristics

- *Absolute maximum ratings*

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		600	V
Isolation voltage	V_{ISO}		1500	V
Average output current	I_O	duty=1/2, $T_c=89^{\circ}C$ Square wave	8	A
Non-Repetitive surge current	I_{FSM}	Sine wave 10ms	70	A
Operating junction temperature	T_j		150	$^{\circ}C$
Storage temperature	T_{stg}		-40 to +150	$^{\circ}C$


- *Electrical characteristics (Ta=25°C Unless otherwise specified)*

Item	Symbol	Conditions	Characteristics	Unit
Forward voltage	V_F	$I_F=8A$	Max. 1.55	V
Reverse current	I_R	$V_R=V_{RRM}$	Max. 10.0	μA
Reverse recovery time	t_{rr}	$I_F=0.1A, I_R=0.2A, I_{rec}=0.05A$	Max. 50.0	ns
Thermal resistance	$R_{th(j-c)}$	Junction to case	Max. 4.5	$^{\circ}C/W$


- *Mechanical characteristics*

Mounting torque	Recommended torque	0.3 to 0.5	N·m
Approximate mass		2.0	g

■ *Outline drawings, mm*

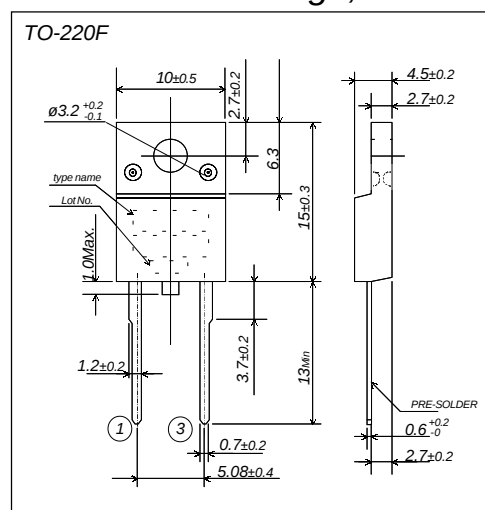


Connection diagram

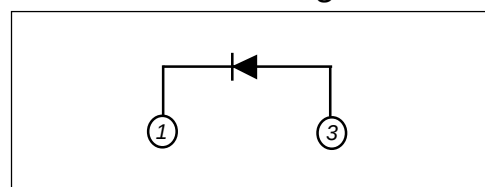


Characteristics


Forward Characteristic (typ.)

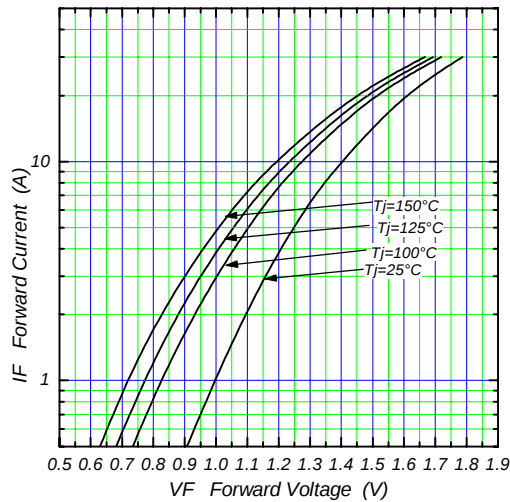


Reverse Characteristic (typ.)

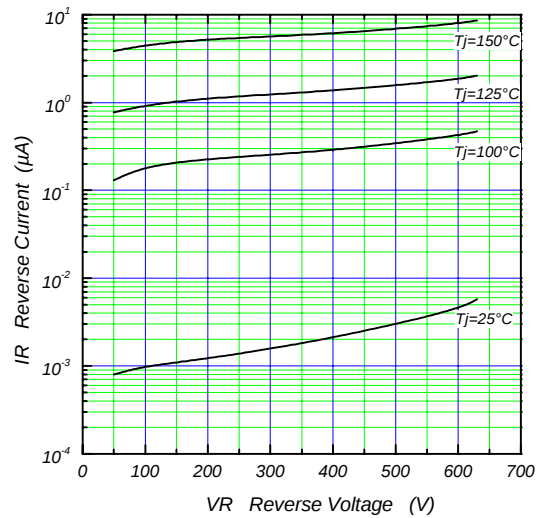


Forward Power Dissipation(max.)

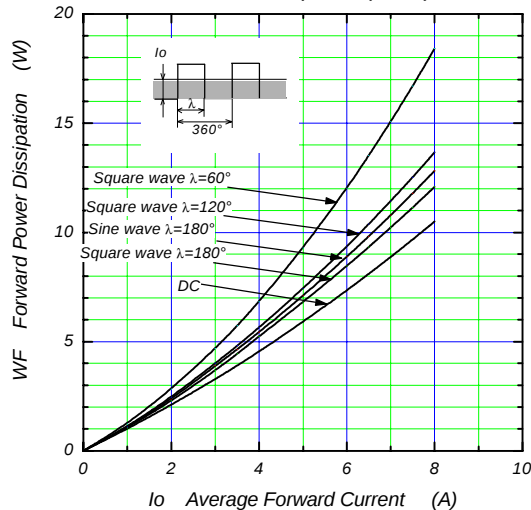

Reverse Power Dissipation (max.)

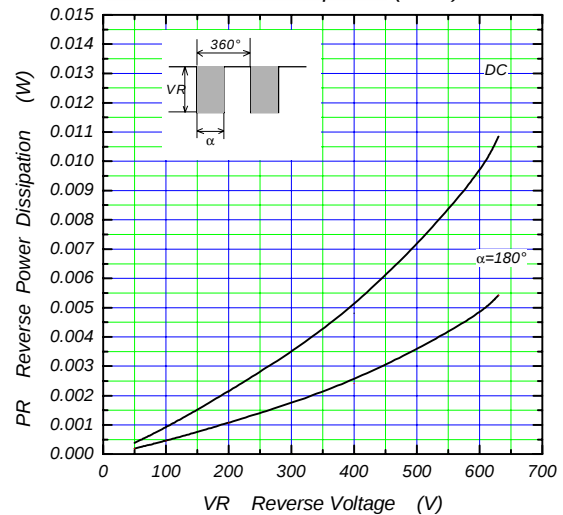

Current Derating (I_O - T_C)(max.)

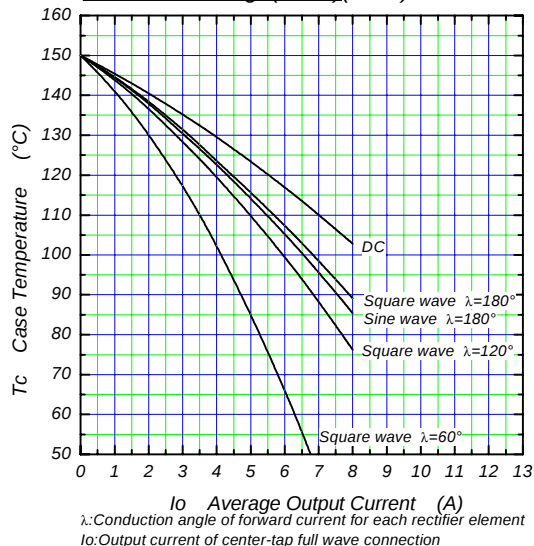

Junction Capacitance Characteristic (typ.)

