


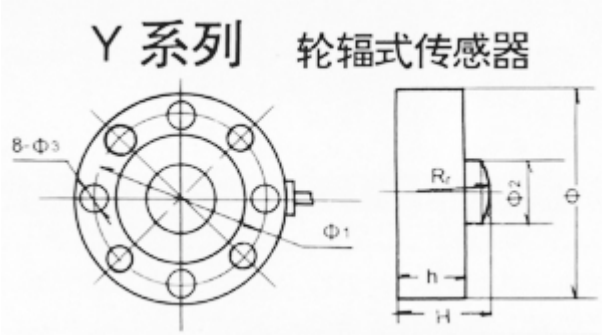

	H	h	Φ	Φ1	Φ2	Φ3	Rr
2t-3t	46	35	135	113	30	11	25
5t-10t	60.5	45	160	128	40	15	25
15t-20t	65	52	180	145	45	15	34
25t-30t	74.5	62	210	170	55	17	48
50t	100	80	210	180	50	14	70

- 量程范围 (rate capacity): 2T-50T
- 低外形，带过载保护，抗测向力、抗干扰能力强。
- 适用于料斗秤、地上衡、轨道衡及测力装置。