

# **SPECIFICATION FOR CERAMIC RESONATOR**

**MODEL NAME: ZTA8.0MT /ZTT8.0MT**



**SHANDONG YIGUANG ELECTRONIC JOINT STOCK CO., LTD**

**Tel: 86—539—8269397 8269399 Fax: 86—539—8269396**




### 1. SCOPE

This specification is applied to the ceramics resonator used for the clock Oscillation of Microprocessor.

### 2. MODEL NAME

| Part Name | Customer' s Part number | Drawing No. |
|-----------|-------------------------|-------------|
| ZTA8.0MT  |                         |             |
| ZTT8.0MT  |                         |             |

### 3. DIMENSIONS

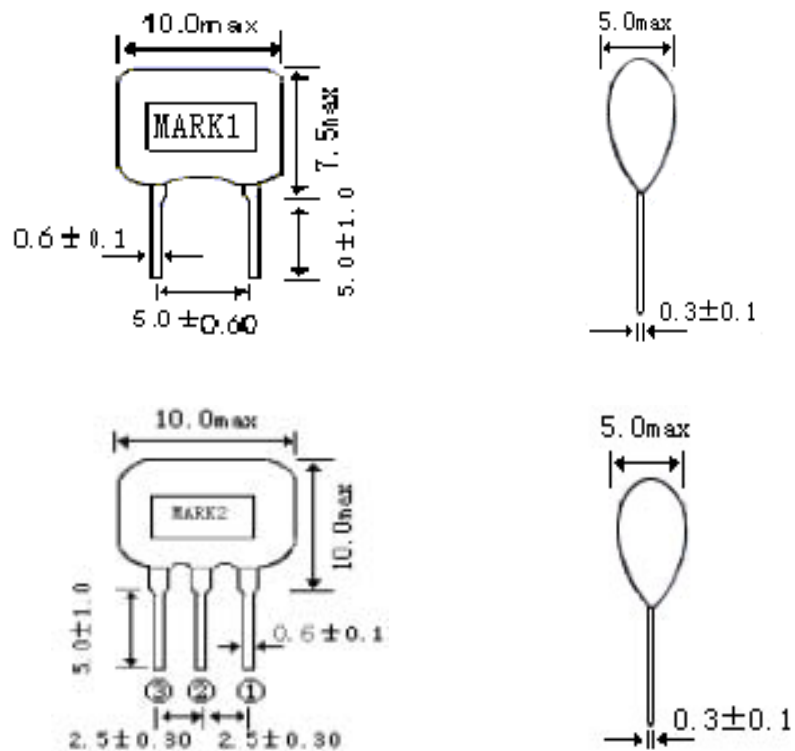


MARK 1: ZTA8.0MT

MARK 2: ZTT8.0MT



#### 4. TEST CIRCUIT

Parts shall be measured under a condition (Temp.:3~35℃.Hum.:45~85%)unless any Necessity to measure under a standard condition (Temp.:20±2℃.Humi.:65±5%) is occurred.

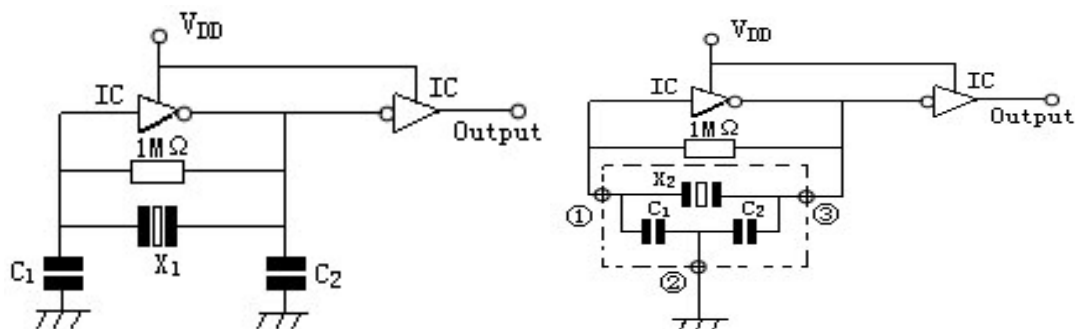

X1: ZTA8.0MT    X2: ZTT8.0MT  
C1=C2=30PF  
IC: TC4069UBP  
VDD=+5V

#### 5. ELECTRICAL CHARACTERISTICS

|     | Item   | Requirements               |
|-----|--|----------------------------|
| 5-1 | Frequency Accuracy                                       | 8.0M±0.5%                  |
| 5-2 | Resonant Impedance                                       | 30 Ω max                   |
| 5-3 | Operating Temperature Range<br>Storage Temperature Range | -20 to +80<br>-30 to +85   |
| 5-4 | Stability Temperature                                    | ±0.3% max. ( -20—+80℃ )    |
| 5-5 | Withstanding Voltage                                     | DC 100V. (less than 5 sec) |
| 5-6 | Insulation Resistance                                    | 100 M Ω min (DC 10V)       |
| 5-7 | Aging for 10 Years                                       | ±0.5±% max                 |

**6. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS**

|     | Test Item                         | Condition of Test  | Requirements   |
|-----|-----------------------------------|--|--|
| 6-1 | Lead strength<br><br>Lead Bending | Force of 1 Kg is applied for 10 second to each lead in axial direction.<br><br>Firmed the terminal up to 2mm. Resonator lead shall be subjected to withstand against 90° bending its stem. This operation shall be done toward both direction.                             | No mechanical damage and the measured values shall meet Item5. |
| 6-2 | Solder ability                    | The terminals of the Resonator shall be immersion in a soldering bath ( $230\pm5^{\circ}\text{C}$ ) for $3\pm0.5$ sec. (refer to Mil-STD-202E-208C)  | The solder shall for coat at least 95% of the terminal.        |
| 6-3 | Vibration                         | Resonator shall be measured after being Applied vibration as below.<br>Vibration Freq:10-55Hz<br>Amplitude:1.5mm<br>Directions:3axial directions<br>Time:2bour/each direction  | The measured values Shall meet table 1                         |
| 6-4 | Random Drop                       | Resonator shall be measured after 3 times Random dropping from the height of 1m.<br>Concrete floor   |  |
| 6-5 | Resistance to Soldering Heat      | Dipped in ( $350\pm10^{\circ}\text{C}$ ) measured solder to a point 1.5mm from Resonator body for $3\pm0.5$ sec or dipped in ( $260\pm5^{\circ}\text{C}$ ) melted solder for $10\pm1$ sec. Resonator shall be measured after being placed in natural condition for 1 hour. |  |

**6. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS**

|     | Test Item                       | Condition of Test   | Requirements                              |
|-----|---------------------------------|---|---|
| 6-6 | Humidity                        | After being placed in a chamber (Humi.: 90-95 % RH Temp:40±2 °C ) for 96 hours Resonator shall be measured after placed in natural condition for 1 hour.              | The measured values<br>Shall meet table 1 |
| 6-7 | Life Test<br>(High temperature) | After being placed in a chamber 85±2°C for 96 hours, Resonator shall be measured after being placed in natural condition for 1 hour.                                  |   |
| 6-8 | Life Test (Low temperature)     | Stored in a chamber (Temp:-20±2 °C) for 1000 hours, Resonator shall be measured after being placed in natural condition for 1 hour.                                   |   |
| 6-9 | Thermal shock                   | After temperature cycling of -20°C (30min) to +80°C (30min) was performed 5 times the Resonator shall be measured after being placed in natural condition for 1 hour. |   |

**Table 1**

| Item               | Limit Value           |
|--------------------|-----------------------|
| Frequency shift    | $F/FO \leq \pm 0.3\%$ |
| Resonant Impedance | $Z_r \leq 5 \Omega$   |

**Note:** The limits in the above table are referenced to the initial Measurements.



**7. NOTICE**

- 7.1 Ceramic Resonator should be stored in storeroom. And the surrounding atmosphere is acid less, alkali-free and no other harmful impurity.**
- 7.2 The package for ceramic damage.**
- 7.3 This specification limits the quality of the component as a single unit.  
Please make sure that the component is evaluated and confirmed the drawing  
When it is mounted to your product.**