

# **SPECIFICATION FOR CERAMIC RESONATOR**

**MODEL NAME: ZTA20.00--25.99MX /ZTT20.00--25.99MX**



**SHANDONG YIGUANG ELECTRONIC JOINT STOCK CO., LTD**  
**Tel: 86-539-8269397 8269399 Fax: 86-539-8269396**




## 1. SCOPE

This specification is applied to the ceramics resonator used for the clock Oscillation of Microprocessor.

## 2. MODEL NAME

Part Name	Customer' s Part number	Drawing No.
ZTA20.00--25.99MX		
ZTT20.00--25.99MX		

## 3. DIMENSIONS

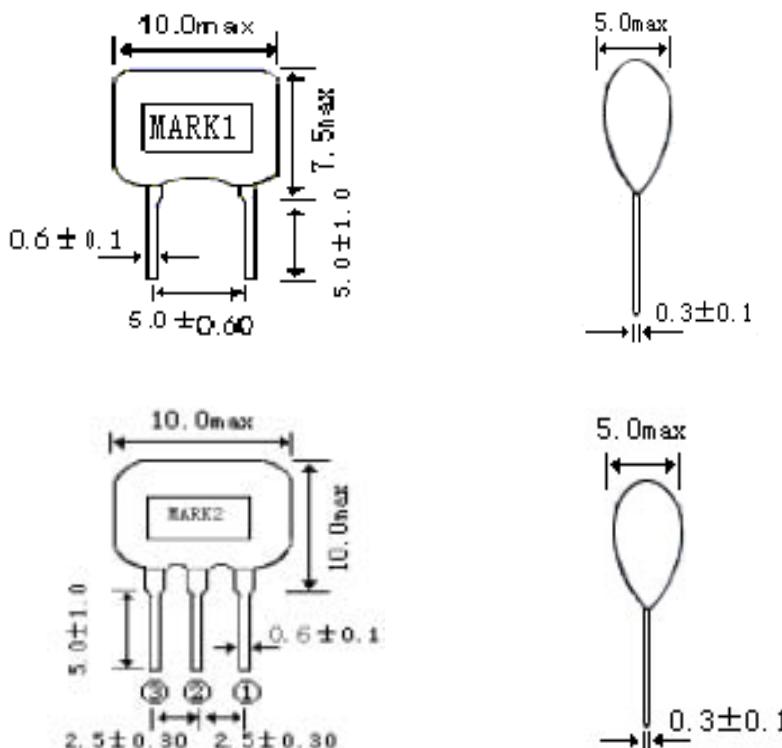


MARK 1: ZTA20.00--25.99MX

MARK 2: ZTT20.00--25.99MX



#### 4. TEST CIRCUIT

Parts shall be measured under a condition (Temp.:3~35°C.Hum.: 45~85%) unless any Necessity to measure under a standard condition (Temp.:20±2°C.Humi.: 65±5%) is occurred.

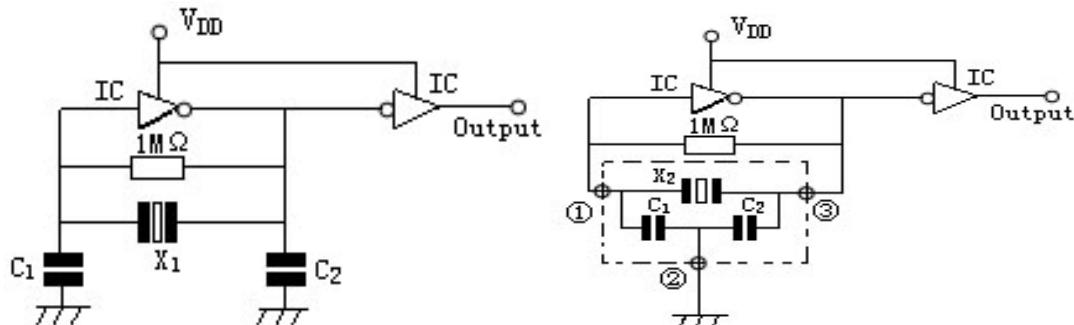

X1: ZTA20.00--25.99MX      X2: ZTT20.00--25.99MX

C1=C2=15PF

IC: 1/674HCU04

VDD=+5V

#### 5. ELECTRICAL CHARACTERISTICS

	Item	Requirements
5-1	Frequency Accuracy	20.00--25.99M±0.5%
5-2	Resonant Impedance	35 Ω max
5-3	Operating Temperature Range Storage Temperature Range	-20 to +80 -30 to +85
5-4	Stability Temperature	±0.3% max. (-20--+80°C)
5-5	Withstanding Voltage	DC 100V. (less than 5 sec)
5-6	Insulation Resistance	100 MΩ min (DC 10V)
5-7	Aging for 10 Years	±0.5±% max

**6.PHYSICAL AND ENVIRONMENTAL CHARCTERISTICS**

	Test Item	Condition of Test	Requirements
6-1	<b>Lead strength</b> <b>Lead Bending</b>	<b>Force of 1 Kg is applied for 10 second to each lead in axial direction.</b> <b>Firmed the terminal up to 2mm. Resonator lead shall be subjected to withstand against 90° bending its stem. This operation shall be done toward both direction.</b>	<b>No mechanical damage and the measured values shall meet Item 5.</b>
6-2	<b>Solder ability</b>	<b>The terminals of the Resonator shall be immersion in a soldering bath (230±5°C) for 3±0.5sec. (refer to Mil-STD-202E-208C)</b>	<b>The solder shall for coat at least 95% of the terminal.</b>
6-3	<b>Vibration</b>	<b>Resonator shall be measured after being Applied vibration as below.</b> <b>Vibration Freq: 10-55Hz</b> <b>Amplitude: 1.5mm</b> <b>Directions: 3 axial directions</b> <b>Time: 2 hour/each direction</b>	<b>The measured values Shall meet table I</b>
6-4	<b>Random Drop</b>	<b>Resonator shall be measured after 3 times Random dropping from the height of 1m.</b> <b>Concrete floor</b>	
6-5	<b>Resistance to Soldering Heat</b>	<b>Dipped in (350±10°C) measured solder to a point 1.5mm from Resonator body for 3±0.5 sec or dipped in (260±5°C) melted solder for 10±1 sec. Resonator shall be measured after being placed in natural condition for 1 hour.</b>	



## 6. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS

	Test Item	Condition of Test	Requirements
6-6	Humidity	<b>After being placed in a chamber (Humi: 90-95 % RH Temp:40±2 °C ) for 96 hours</b> <b>Resonator shall be measured after placed in natural condition for 1 hour.</b>	
6-7	Life Test (High temperature)	<b>After being placed in a chamber 85±2°C for 96 hours, Resonator shall be measured after being placed in natural condition for 1 hour.</b>	The measured values Shall meet table 1
6-8	Life Test (Low temperature)	<b>Stored in a chamber (Temp:-20±2 °C ) for 1000 hours, Resonator shall be measured after being placed in natural condition for 1 hour.</b>	
6-9	Thermal shock	<b>After temperature cycling of -20°C (30min) to +80°C (30min) was performed 5 times the Resonator shall be measured after being placed in natural condition for 1 hour.</b>	

Table 1

Item	Limit Value
Frequency shift	$F/FO \leq \pm 0.3\%$
Resonant Impedance	$Z_r \leq 5 \Omega$

Note: The limits in the above table are referenced to the initial Measurements.



---

**7. NOTICE**

- 7.1 Ceramic Resonator should be stored in storeroom. And the surrounding atmosphere is acid less, alkali-free and no other harmful impurity.**
- 7.2 The package for ceramic damage.**
- 7.3 This specification limits the quality of the component as a single unit.  
Please make sure that the component is evaluated and confirmed the drawing  
When it is mounted to your product.**