



ZTT Series


Ceramic Resonator with built-in capacitors

STANDARD SPECIFICATIONS


Part Number	Frequency Range MHz.	Frequency Accuracy @ 25°C	Temperature Stability °C	Aging For 10 Years	Operating Temperature °C	C1	C2
ZTT-MG	1.80 ~5.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	22 pF	22 pF
ZTT-MT	5.01 ~13.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	22pF	22 pF
ZTT-MX	13.01 ~20.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	22 pF	22 pF
ZTT-MX	20.01 ~25.99	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	15pF	15 pF
ZTTS-MX	26.00 ~50.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	5 pF	5 pF

Part Number Guide

Sample Part #: **ZTT -MG - 2.00 -T**
ZTT – Package – Frequency – Packaging
Packaging: - = Bulk , -T = Tape and Reel

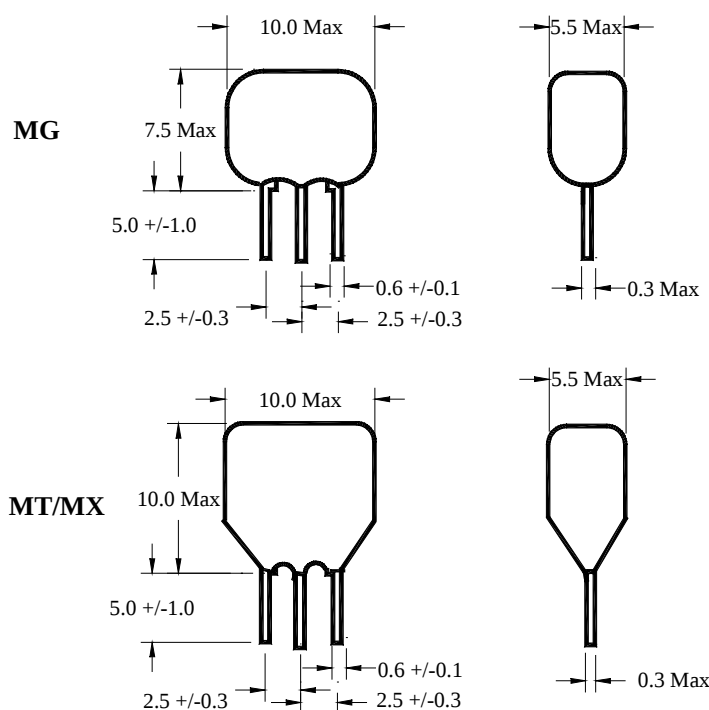

DIMENSION UNITS: mm

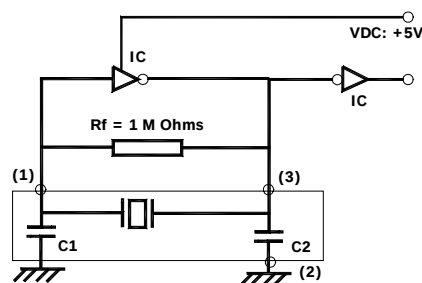

MG / MT IC: 1/6 CD4069UBEX2
 MX IC: 1/6 TC74HCU04

ILSI America

5458 Louie Lane Reno, NV 89511 Phone: 775-851-8880 • Fax: 775-851-8882

• email: e-mail@ilsiamerica.com • www.ilsiamerica.com

Specifications subject to change without notice