

Coaxial

Directional Couplers

50Ω 5 to 2000 MHz

NEW!
Z30-SERIES


FL905

Features

- very flat coupling
- very broad, multi-octave
- all welded construction
- protected by patent 6140887
- additional patent pending

Applications

- instrumentation
- cable tv
- communication receivers & transmitters

Electrical Specifications ($T_{AMB} = -55^{\circ}\text{C}$ to 100°C)

MODEL NO.	FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W			CASE STYLE	CONNECTION	PRICE \$
		Max. Flatness	L Typ.	M Typ.	U Typ.	L Typ.	M Typ.	U Typ.	L Typ.	M Typ.	U Typ.	L Max.	MU Max.	Qty. (1-24)								
Z30-9-4	5-1000	8.9±0.5	±0.5	1.1	2.0	1.1	1.8	1.3	2.0	21	17	20	13	16	—	1.20	0.5	1.0	FL905	db	29.95	
Z30-12-4	5-1000	12.3±0.5	±0.9	0.7	1.8	0.75	1.4	0.9	1.6	35	25	30	18	19	—	1.15	0.5	1.0	FL905	db	29.95	
Z30-13-4	5-1000	13.0±0.5	±0.7	0.6	1.3	0.7	1.3	0.9	1.6	21	17	19	13	14	—	1.15	0.5	1.0	FL905	db	29.95	
Z30-17-5	50-1000	16.8±0.7	±0.9			0.7	1.4					20	13			1.30	0.5	1.0	FL905	db	29.95	
	1000-1500	17.7±0.9	±1.0			0.85	1.5					18	9			1.30	0.5	1.0				
	1500-2000	18.5±1.0	±0.8			1.1	1.7					11	—			1.30	0.5	1.0				
Z30-20-4	20-1000	20.5±0.6	±0.9	0.3	1.0	0.35	1.0	0.5	1.2	22	15	25	18	19	—	1.11	1.0	1.0	FL905	db	29.95	

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Maximum Ratings


Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Pin Connections

PORT	(db)
INPUT	1
OUTPUT	2
COUPLED	3

Outline Drawing

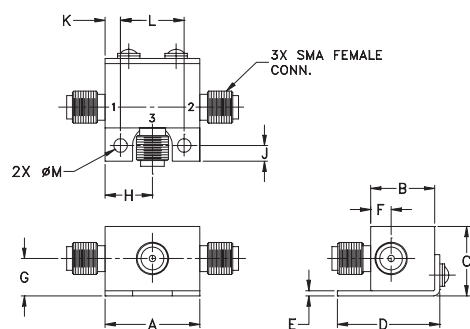

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.74	.50	.54	.80	.04	.16	.29	.37	.122
18.80	12.70	13.72	20.32	1.02	4.06	7.37	9.40	3.10
K	L	M	wt.					
.122	.496	.106	grams					
3.10	12.60	2.69	20.0					

REV. A
M81970
Z30-9-4 EDR-5733/1
Z30-12-4 EDR-5752/1
Z30-13-4 EDR-5753/1
Z30-17-5 EDR-5754/1
Z30-20-4 EDR-5755/2
Z30-SERIES
RVN/TD/CP
020627


[INTERNET http://www.minicircuits.com](http://www.minicircuits.com)

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED